

Detecting sample swaps in diverse NGS data types using linkage disequilibrium

Nauman Javed¹, Yossi Farjoun², Tim J. Fennell², Charles B. Epstein², Bradley E. Bernstein^{1,2}, Noam Shoresh^{1,2,†}

¹Department of Pathology and Center for Cancer Research, Massachusetts General Hospital and Harvard Medical School, Boston, Massachusetts 02114, USA.

²Broad Institute of MIT and Harvard, Cambridge, Massachusetts 02142, USA.

†Corresponding author. Email: nshoresh@broadinstitute.org

1 As the number of genomics datasets grows rapidly, sample mislabeling has become a high stakes
2 issue. We present CrosscheckFingerprints (Crosscheck), a tool for quantifying sample-relatedness and
3 detecting incorrectly paired sequencing datasets from different donors. Crosscheck outperforms
4 similar methods and is effective even when data are sparse or from different assays. Application of
5 Crosscheck to 8851 ENCODE ChIP-, RNA-, and DNase-seq datasets enabled us to identify and correct
6 dozens of mislabeled samples and ambiguous metadata annotations, representing ~1% of ENCODE
7 datasets.

8 Introduction

9 Biomedical research is rapidly embracing large-scale analysis of next-generation sequencing (NGS)
10 datasets, often by integrating data generated by consortia or many individual research labs. Parallelized
11 NGS analysis of tissues from many different patients is also commonplace in clinical genomics pipelines.
12 In these settings, sample or data mislabeling, where datasets are incorrectly associated with a donor,
13 can lead to erroneous conclusions, misdirect future research, and affect treatment decisions¹⁻³ (Fig 1a).
14 Verifying the relatedness of samples that nominally share a donor is therefore a crucial quality-control
15 step in any NGS pipeline.

16 Several methods utilize genetic information from NGS datasets as an endogenous barcode to
17 verify sample relatedness⁴⁻¹⁰. The common logic behind these tools is that each genome harbors a
18 unique set of single nucleotide polymorphisms (SNPs) which are shared between datasets originating
19 from the same donor. A limitation of these methods is their requirement that sequencing reads from
20 both inputs overlap the exact genomic position of informative SNPs. When insufficient reads satisfy this
21 condition—for example when the input datasets are shallow or target different genomic regions (i.e.
22 different transcription factors), the power to evaluate sample relatedness is compromised. Many NGS-
23 based studies now integrate multiple types of assays¹¹⁻¹⁵ and utilize shallow sequencing to reduce cost at
24 the expense of read-depth. This is commonly encountered in highly multiplexed experiments,
25 sequencing spike-ins, and large cohort sequencing efforts in population and cancer genomics (i.e. 1000
26 Genomes, structural variant calling). We therefore set out to develop a method for quantifying sample-
27 relatedness that was both robust to shallow sequencing depth and that could be systematically applied
28 to modern large-scale projects incorporating multiple data types.

29 Linkage disequilibrium (LD) is the non-random association of alleles at different loci within a
30 given population¹⁶. This association implies that comparing datasets across SNPs in high LD—termed LD-
31 blocks—would provide more statistical power to compare datasets than using single SNPs alone.

32 Because of LD, two non-overlapping reads from different datasets may support (or provide evidence
33 against) a common genetic background, as long as they overlap SNPs in the same LD block (Fig 1b). For
34 each input dataset, Crosscheck uses reads overlapping SNPs within each LD block to calculate a block
35 allele fraction and compute diploid genotype likelihoods, which are then compared (Methods). The
36 relative likelihood of a shared or distinct genetic background at each block is reported as a log-odds ratio
37 (LOD score). These scores are combined across all blocks to report a genome-wide LOD score. This
38 calculation relies on two approximations: that linkage between SNPs in an LD block is perfect, and that
39 SNPs in distinct blocks are independent. A positive LOD score indicates a higher likelihood that the two
40 datasets share a donor, while a negative LOD score suggests that the datasets are from distinct donors.
41 The Crosscheck calculation assumes that the two datasets are a priori equally likely to be from the same
42 donor as they are from different ones. It is possible to incorporate a different prior expectation for a
43 mismatch by shifting the LOD scores (Methods). Though the magnitude of the LOD score reflects
44 genotyping confidence, simplifying assumptions prevent direct interpretation of the LOD score as a true
45 likelihood ratio (Methods). Crosscheck is implemented as part of Picard-Tools (<https://github.com/broadinstitute/picard>), and is routinely used for quality control by the Broad Institute's Genomics
46 Platform, using a small set of LD blocks optimized for use with whole-exome-sequencing data.
47

48 We reasoned that applying Crosscheck across a large, genome-wide set of LD-blocks (haplotype
49 map) would allow us to compare the genotype of diverse datasets and would be robust to low coverage
50 and sequencing errors. We constructed a map consisting of nearly 60,000 common (minor allele
51 frequency $\geq 10\%$) bi-allelic SNPs from the 1000 Genomes¹¹ project, the majority of which lie in LD-
52 blocks of two or more SNPs in order to maximize the probability of informative read overlap (Fig 1c,
53 Methods). SNPs within each block are highly correlated ($r^2 > 0.85$), while SNPs between blocks are
54 approximately independent ($r^2 < 0.10$). Increasing or decreasing the thresholds for within-block and
55 between-blocks correlations by 0.05 had no effect on the method's performance on a testing data set
56 (described in the next paragraph). Finally, in order to reduce bias from donor ancestry, we required that
57 LD blocks have similar allele frequencies across different human sub-populations. The pipeline for
58 creating haplotype maps exists as a standalone tool
59 (https://github.com/naumanjaved/fingerprint_maps) and comes with pre-compiled haplotype maps for
60 both hg19 and GRCh38. The pipeline can be customized to create LD blocks in specific genomic areas
61 (i.e. coding regions) and with different parameters (i.e. different intra or inter-block r^2).

62 In the rest of this manuscript we demonstrate that CrosscheckFingerprints, used with the
63 haplotype map that we generated, can reliably detect donor mislabeling with fewer errors than other
64 existing methods. It is particularly superior in challenging settings such as low sequencing depth or when
65 comparing datasets from diverse data types. We demonstrate the suitability of Crosscheck for large
66 scale production operation by applying it to 8,851 datasets from the ENCODE consortium, and discuss
67 the misannotations that this analysis uncovered.

68 Results

69 Benchmarking

70 To pilot our method, we calculated LOD scores between donor-matched and donor-mismatched
71 pairs of public datasets from the ENCODE¹² database, which hosts data from thousands of diverse NGS
72 experiments (Methods). Classification performance was measured in terms of the false flag rate (FFR),

73 the fraction of donor-matched pairs incorrectly flagged as donor-mismatches, and the false match rate
74 (FMR), the fraction of donor-mismatched pairs incorrectly identified as donor-matches. Our testing set
75 comprised of all pairwise comparisons between 281 RNA-, DNase-, and ChIP-seq (targeting histones,
76 CTCF, or POL2) datasets with verified donor annotations (supplementary table S1), and all donor-
77 mismatched comparisons between 101 ChIP-seq experiments targeting transcription factors and
78 chromatin modifiers (supplementary table S2). This resulted in a final testing set of 34,336 donor-
79 mismatches, and 9,767 donor-matches. Regardless of the input assay or enrichment target, Crosscheck
80 correctly classified almost all dataset pairs with 0% FMR and 0.01% FFR, and showed a clear separation
81 between donor-mismatches (negative LOD) and donor-matches (positive LOD) (Fig. 1d). Our method
82 therefore confidently detects donor-matched and donor-mismatched dataset pairs.

83 We next quantified how using LD blocks improves classification performance. We generated two
84 equally sized subsets of our full haplotype map—one comprised solely of unlinked SNPs and the other
85 containing only LD blocks with two or more SNPs, and used these to classify the same testing dataset
86 pairs. To simulate sparse datasets generated by spike-ins and multiplexed sequencing, we conducted
87 each comparison at a range of sequencing depths, expressed as the percentage of reads subsampled
88 from the original datasets (Methods, Supplementary Fig 1a). Using LD blocks significantly decreased
89 FMR and FFR, particularly at lower read depths and for cross-assay/target comparisons (Fig 1e,
90 Supplementary Fig 1b). For example, at 5% sub-sampling ($\leq \sim 10^7$ reads), using LD blocks decreased the
91 FMR and FFR by nearly 10% relative to using single SNPs for cross-assay comparisons.

92 Comparison with other methods

93 As mentioned above, there are other tools that quantify genetic sample relatedness. For
94 comparison purposes, we considered only methods that could be applied to the general use case that
95 Crosscheck is designed to address, namely comparing any two NGS datasets, and that can be deployed
96 at scale, so that calculating tens-to-hundreds of thousands of comparisons is tractable. Two of the
97 methods we examined, HYSIS⁶ and BAM-matcher⁷, did not satisfy these criteria. Two other tools,
98 Conpair⁸ and BAMixChecker⁹, provided inconclusive results for a high percentage of the testing-set
99 comparisons (Methods). NGSCheckmate¹⁰ (NGSC) is a model-based method that compares datasets by
100 correlating allele fractions across a panel of reference SNPs, and was the only other method that could
101 be directly compared to Crosscheck on the testing dataset. At high and intermediate read-depths, both
102 methods show similar performance. At lower read depths ($\leq 15\%$ subsampling) however, Crosscheck
103 outperforms NGSC, as indicated by a consistently lower FMR and FFR (Fig. 1f). Crosscheck is particularly
104 effective at classifying cross assay dataset pairs, where it shows a 2-3% lower FMR and FFR than NGSC at
105 5% subsampling. In these use cases, Crosscheck performs better than NGSC due to its use of LD and the
106 large number of SNPs in the haplotype map. Using LD blocks allows comparison of non-overlapping
107 reads, while using a large set of SNPs increases the chance that input datasets will contain genetically
108 informative reads. An illustrative example is a specific comparison between two ChIP-seq datasets, one
109 targeting H3K27me3 and the other H3K27ac. At 5% subsampling, these datasets cover 8% and 2% of the
110 genome respectively, and overlap at only 0.02%, which is expected from these mutually exclusive
111 histone modifications. Given this small set of potentially informative reads, NGSCheckmate wrongly
112 concludes that the datasets are derived from the same donor, while Crosscheck is still able to make the
113 correct call (Supplementary Fig. 1e). We have also tested Crosscheck, NGSC, BAMixChecker and Conpair
114 on sample pairs from 7 donors that are genetically related. We found that Crosscheck can identify all

115 pairs of samples from related individuals as donor mismatches, and is superior in this context to the
116 other tools (Supplementary Fig. 2).

117 Finally, we used the distribution of LOD scores from incorrectly classified pairs to define an
118 inconclusive LOD score range of $-5 < LOD < 5$, in which a dataset pair cannot be confidently classified
119 (Methods, Supplementary Fig. 1c). Outside of this range, any pair with $LOD \geq 5$ is denoted a donor-
120 match, and those with $LOD \leq -5$ are flagged as donor-mismatches. The inconclusive range highlights the
121 interpretability of Crosscheck's LOD score relative to NGSC's binary outputs (match or mismatch), since
122 clear donor-mismatches can be prioritized and investigated separately from inconclusive comparisons.
123 We conclude that using Crosscheck with a full haplotype map enables more accurate detection of
124 donor-mismatched pairs in diverse and shallow collections of data.

125 Crosscheck analysis of ENCODE data

126 To illustrate the utility of our method on a consortium-scale dataset, we next analyzed the
127 remaining datasets in ENCODE. We used our method to verify the donor-annotation for all human hg19
128 aligned DNase-, RNA-, and ChIP-seq datasets in the ENCODE database whose annotated donor was
129 represented by at least 4 datasets – a total of 8,851 datasets (Fig 2a). To scale our analysis to a database
130 of this size, we compared each dataset to a set of three representative datasets from its annotated
131 donor, and flagged any dataset with $LOD < 5$ for further review (Methods). To exclude the possibility
132 that the representative set for each donor contained a donor-mismatch, we required that all pairwise
133 comparisons between representative datasets yield an LOD score ≥ 5 . This strategy scales linearly with
134 the size of the database, and in our case results in a 1000-fold reduction in computation relative to
135 performing all pairwise comparisons.

136 Our strategy confirmed the annotated donor for 97% of datasets. The remaining 3% (256
137 datasets) were flagged as potential donor-mismatches ($LOD \leq -5$), and only $\sim 0.1\%$ yielded inconclusive
138 results ($-5 < LOD < 5$) (Fig 2b). We next compared each flagged mismatch to the representative datasets
139 for each of the ENCODE donors in order to nominate a true donor identity. We also compared each
140 flagged mismatch to all other flagged mismatches in order to identify genetically consistent clusters and
141 uncover patterns of mislabeling.

142 This analysis uncovered 3 major categories of mislabeling (as well as a small fraction, 0.4%, of
143 datasets that exhibited a pattern consistent with cross-sample contamination, as described in Methods
144 and Supplementary Fig. 3). The first is a straightforward error where cells from one donor are mistakenly
145 labeled as deriving from a different donor. The likelihood of such a mistake increases when working with
146 several cell lines that are each used in a large number of experiments. For example, out of 4 flagged
147 datasets labeled as K562, two were shown to actually derive from GM12878 cells while the other two
148 derived from HEK293 cells. This type of mislabeling may also occur for primary cells or tissues when
149 many biological samples from multiple donors are obtained from the same source, as in the case of 300
150 embryonic tissue samples processed by ENCODE from a single lab.

151 The second class of mislabeling occurs when biological samples of the same cell type from
152 multiple donors are incorrectly labeled as deriving from a single donor. This is the case with some of the
153 commercially available primary cell lines that have been deeply interrogated by the consortium over
154 more than a decade, and for which cells have been procured multiple times. For example, HUVEC cells
155 are annotated as being derived from two different donors in the ENCODE metadata. However, our
156 analysis indicates that HUVEC samples actually derive from at-least 5 distinct donors (Fig 2c). This mis-

157 annotation went undetected by ENCODE's previous quality control pipelines because all samples were
158 of the same cell type and so exhibited similar epigenetic profiles.

159 The HUVEC example also highlights the third type of labeling inaccuracy, in which a single donor
160 is accessioned multiple times by dozens of different labs over several years. This results in slight
161 variations in donor name or description, leading to genetically identical samples being incorrectly
162 attributed to distinct donors. For example, some samples deriving from putative donor A are attributed
163 to HUVEC donor 1, while other samples from donor A are attributed to the distinct HUVEC donor 2.

164 Overall, our analysis of the ENCODE dataset suggested that substantive mislabeling error
165 occurred at a rate of ~1%. For these datasets, true donor identities were confirmed using ENCODE's
166 extensive metadata records and all mislabeled datasets were corrected (Methods).

167 In conclusion, we present a robust and easy-to-use method for quantifying sample relatedness
168 which outperforms similar methods. Combined with our method for database analysis and haplotype
169 map, CrosscheckFingerprints can be readily applied for detecting sample mislabeling in large, diverse
170 databases without any optimization. We suggest it as a critical component of any NGS quality control
171 pipeline.

172

173 **Methods**

174 **LOD Derivation**

175 Here, a basic overview of the fingerprinting LOD score derivation is provided. A more detailed derivation
176 is available at the Picard repository at:

177 <https://github.com/broadinstitute/picard/raw/master/docs/fingerprinting/main.pdf>

178 Consider a LD block/locus containing a single bi-allelic SNP with major allele A and minor allele B , and
179 two sequencing datasets x and y . Let θ and φ denote the diploid haplotype of datasets x and y
180 respectively at this locus. θ and φ can each take one of three possible haplotypes: AA, AB, or BB. Let s
181 be a Bernoulli random variable where $s = 1$ denotes a sample swap (indicating that x and y arose from
182 two independent individuals) with posterior probability $p(s = 1 | x, y)$, and $s = 0$ denotes a shared
183 genetic origin (the samples came from the same individual). Using Bayes' rule and the prior probability
184 of no-swap, the posterior odds ratio of a no-swap vs. swap is given by:

$$\frac{p(s = 0 | x, y)}{p(s = 1 | x, y)} = \frac{p(x, y | s = 0) p(s = 0)}{p(x, y | s = 1) p(s = 1)} \quad (1)$$

185 We assume that in the case of a swap, the distinct individuals are independently sampled from the
186 population and that samples from the same individual have the same genotype, allowing us to write
187 $p(\theta, \varphi | s) = p(\theta) p(\varphi)$ for $s = 1$, and $p(\theta, \varphi | s) = p(\theta)$ if $\theta = \varphi$. Given that x is conditionally
188 independent of φ and y given θ , and y is conditionally independent of θ given φ , we can also write
189 $p(x, y | \theta, \varphi) = p(x | \theta) p(y | \varphi)$.

190 With these two expressions, we derive that:

$$\begin{aligned}
 p(x, y | s) &= \sum_{\theta, \varphi} p(x, y | \theta, \varphi, s) p(\theta, \varphi | s) \\
 &= \begin{cases} \sum_{\theta} p(x | \theta) p(\theta) \sum_{\varphi} p(y | \varphi) p(\varphi) & \text{if } s = 1 \\ \sum_{\theta = \varphi} p(x | \theta) p(y | \varphi) p(\theta) & \text{if } s = 0 \end{cases} \quad (2)
 \end{aligned}$$

191 Substituting the results of equation (2) into equation (1), we rewrite the posterior odds of no-swap as:

$$\frac{\sum_{\theta = \varphi} p(x | \theta) p(y | \varphi) p(\theta)}{\sum_{\theta} p(x | \theta) p(\theta) \sum_{\varphi} p(y | \varphi) p(\varphi)} \cdot \frac{p(s = 0)}{p(s = 1)} \quad (3)$$

192 Next, we consider evidence over multiple blocks i with correspondingly indexed θ_i , φ_i , x_i , and y_i . **We**
 193 **assume that the haplotypes at distinct blocks are independent**, and that reads at one block give no
 194 information about another. In practice, this assumption is enforced by guaranteeing that a single read
 195 cannot be used to provide genotype evidence at more than one locus. We calculate: $p(x | \theta) =$
 196 $\prod_i p(x_i | \theta_i)$ and $p(y | \varphi) = \prod_i p(y_i | \varphi_i)$, and substitute into equation (3) to get:

$$\prod_i \left(\frac{\sum_{\theta_i = \varphi_i} p(x_i | \theta_i) p(y_i | \varphi_i) p(\theta_i)}{\sum_{\theta_i} p(x_i | \theta_i) p(\theta_i) \sum_{\varphi_i} p(y_i | \varphi_i) p(\varphi_i)} \right) \cdot \frac{p(s = 0)}{p(s = 1)} \quad (4)$$

197 Finally, since the odds ratio of no-swap to swap may vary by several orders of magnitude depending on
 198 the input files, we compute the base 10 logarithm in order to facilitate comparison and interpretation:

$$\begin{aligned}
 LOD &= \log \left(\frac{\text{odds}_{\text{same individual}}}{\text{odds}_{\text{different individual}}} \right) \\
 &= \sum_i \log \left(\frac{\sum_{\theta_i = \varphi_i} p(x_i | \theta_i) p(y_i | \varphi_i) p(\theta_i)}{\sum_{\theta_i} p(x_i | \theta_i) p(\theta_i) \sum_{\varphi_i} p(y_i | \varphi_i) p(\varphi_i)} \cdot \frac{p(s = 0)}{p(s = 1)} \right) \quad (5)
 \end{aligned}$$

199 The program assumes a conservative prior of $\frac{p(s=0)}{p(s=1)} = 1$ by default. A different prior would result in a
 200 shift of the LOD score by a constant, and users may adjust the LOD score by such a constant as needed
 201 on a case-by-case basis. A positive LOD (log-odds ratio) is interpreted as evidence for the two datasets x
 202 and y arising from the same individual, while a negative LOD is evidence of a sample-swap, i.e. the two
 203 datasets arose from different individuals. Scores close to zero are inconclusive, and tend to result from
 204 low coverage, or poor overlap between the two datasets, at the observed sites.

205 To see the expected maximal contribution of a single locus, we assume that the likelihoods in (5) are
 206 vanishingly small when the data doesn't match the genotype. Thus, the LOD for a single locus reduces to
 207 $-\log p(\theta)$. The expected LOD contribution needs to be marginalized over the different possible
 208 genotypes, leading to a $-\sum_{\theta} p(\theta) \log p(\theta)$, which obtains a maximal value of $1.5 \log_{10} 2 \approx 0.45$ at an
 209 allele frequency of 0.5 (leading to $p(\theta = AA) = 0.25$, $p(\theta = AB) = 0.5$, and $p(\theta = BB) = 0.25$). This
 210 means that when creating the haplotype map, it is most informative to choose variants with an allele
 211 frequency close to 0.5.

212 There is no theoretical lower limit to the contribution of a single locus. This is because, in theory,
213 overwhelming evidence (hundreds of genetically-consistent, high-quality reads) of different genotypes
214 for two datasets at even a single locus is sufficient to rule out that the samples are derived from the
215 same donor. However, as noted below in the section on the limitations of LOD calculation, there are
216 multiple factors that this formulation does not account for. Our approach ultimately relies on
217 cumulative evidence, albeit noisy, from a large number of loci, rather than looking for the small number
218 of high-confidence cases. It is for this reason that in the implementation of equation (5) in the code, we
219 have included an explicit lower cap on the possible contribution of any single LD block. The selection of
220 the specific value at which to cap the negative contribution was guided by the following argument: We
221 consider a single specific locus, and assume a conservative prior, $(s = 0)/p(s = 1) = 1$. In addition, we
222 assume that at that locus one dataset is only compatible with a single genotype, namely $p(y | \theta)$ is
223 nonzero for only one value of θ . In this case the contribution to the likelihood ratio for that locus
224 reduces to:

225

$$\frac{p(x | \theta)p(y | \theta)p(\theta)}{(\sum_{\theta_i} p(x | \theta_i)p(\theta_i))p(y | \theta)p(\theta)} \gtrsim p(x | \theta) \quad (6)$$

226 If both samples are in fact from the same donor, and the discrepancy between x and θ is due to a
227 sequencing error, 10^{-3} is a reasonable ballpark estimate of $p(x | \theta)$ ¹⁷. With this, the actual score
228 calculated by Crosscheck is:

$$LOD' = \sum_i \max \left(\log \left(\frac{\sum_{\theta_i=\varphi_i} p(x_i | \theta_i)p(y_i | \varphi_i)p(\theta_i)}{\sum_{\theta_i} p(x_i | \theta_i)p(\theta_i) \sum_{\varphi_i} p(y_i | \varphi_i)p(\varphi_i)} \cdot \frac{p(s = 0)}{p(s = 1)} \right), \sigma \right) \quad (7)$$

229 Where $\sigma = -3$ by default, and is a parameter that can be set by the user.

230 Calculation of data likelihoods $p(x | \theta)$ from sequencing reads

231 The program assumes that sequencing data arrives in the form of reads from a single individual (i.e. not
232 contaminated), from a diploid location in the genome, and with no reference bias. Only non-secondary,
233 non-duplicate reads with mapping quality greater than 20 are used to calculate likelihoods. In addition,
234 bases must have a quality score of at least 20 and must agree with either the reference or pre-
235 determined alternate base to support observations at haplotype blocks. Since the algorithm assumes
236 that read evidence is independent, the reads should have been duplicate-marked prior to fingerprinting.
237 The algorithm doesn't use SNPs from the same read-pair twice, since this would violate the assumption
238 of independence.

239 Consider a dataset x for which we observe n total sequencing reads, denoted by r_k , at a locus
240 containing a single bi-allelic SNP with major allele A and minor allele B . The possible block haplotypes
241 are then $\theta \in \{AA, AB, BB\}$. For each read r_k which overlaps the SNP, let $o_k \in \{A, B\}$ denote the observed
242 SNP allele and let $e_k \in (0, 1)$ denote the probability of error of each observation (the quality score). We
243 seek to compute the likelihood of the data (the sequencing reads r_k) given the haplotypes. The
244 likelihood of a single base observation $p(o_i, e_i | \theta)$ is expressed by:

$$p(o_k, e_k | \theta) = \begin{cases} I_B(o_k)e_k + I_A(o_k)(1 - e_k) & \theta = AA \\ 0.5 & \theta = AB \\ I_A(o_k)e_k + I_B(o_k)(1 - e_k) & \theta = BB \end{cases} \quad (8)$$

245 where I is an indicator function such that $I_A(o) = \begin{cases} 1 & \text{if } o = A \\ 0 & \text{if } o = B \end{cases}$ and $I_B(o) = \begin{cases} 1 & \text{if } o = B \\ 0 & \text{if } o = A \end{cases}$ and the
246 assumption is that an error will cause a switch in the observed allele from A to B.

247 The likelihood model for all reads r can then be written as:

$$p(r | \theta) = p(o, e | \theta) = \prod_{k=0}^n p(o_k, e_k | \theta) \quad (9)$$

248 Incorporation of Linkage Information

249 The calculations above assume an LD block containing a single SNP for ease of computation, but the
250 framework is easily extended to account for LD blocks containing multiple SNPs, which increases power
251 of comparison. Each LD block used for genotyping contains an “anchor” SNP which is in high linkage with
252 all other SNPs within the block, and independent of all other anchor SNPs in other blocks. Given that all
253 SNPs in a block are tightly linked(enforced with a strict r^2 correlation cutoff), **we make the simplifying**
254 **assumption that the genotype at any SNP within an LD block is perfectly correlated with the genotype**
255 **of the anchor SNP, and that all SNPs within a block have the same allele frequency, equal to that of**
256 **the anchor SNP.** Then, reads overlapping any SNP within a block can be used to infer a total block
257 haplotype, which is represented by the possible diploid genotypes of the anchor SNP. For example,
258 consider an anchor SNPs S_1 with major allele A and minor allele B , and a linked SNP S_2 with major allele
259 C and minor allele D . Then any observation of allele C at SNP S_2 is taken as evidence of allele A at S_1 ,
260 and any observations of allele D at S_2 is taken as evidence of allele B at S_1 . Using this strategy, evidence
261 across all SNPs within a block can be used to infer a total block haplotype, which can be represented by
262 the 3 possible diploid genotypes of the anchor SNP. That is, for an anchor SNP with major allele A and
263 minor allele B , the possible block haplotypes are AA , AB , and BB , with prior probabilities dependent on
264 the allele frequencies of A and B .

265 Limitations of LOD calculation

266 Though the magnitude of the LOD score reflects greater genotyping confidence, it cannot be directly
267 interpreted as a likelihood ratio (e.g. an LOD of 200 does not correspond to a 10^{200} probability of a
268 shared vs. different genetic origin), as the model does not fully account for sequencing noise, data
269 quality, contamination, and relatedness. In addition, we did not model the incomplete dependence
270 between haplotype blocks, nor the incomplete dependence of SNPs within blocks.

271 Our framework also assumes that the only two sources of a base are the observed allele or a sequencing
272 error. This assumption can lead to incorrect results in the cases where a sample has particularly noisy
273 data due to pre-sequencing events (such as PCR or FFPE processing), non-conforming LD blocks, or high
274 contamination. These samples could be genotyped as heterozygous due to the noisy region or the non-
275 confirming LD block structure. Including these error modes into the model would increase robustness
276 and accuracy.

277 **Implementation Details**

278 Crosscheck is implemented as part of the Picard-Tools suite, a set of Java command line tools for
279 manipulating high-throughput sequencing data. It accepts VCF/BAM/SAM formatted inputs and can
280 perform comparisons at the level of samples, libraries, read-groups, or files. Crosscheck is provided
281 alongside a utility called ExtractFingerprints which for an input bam, outputs a VCF containing the
282 genotypes and genotype likelihoods across all LD blocks within the supplied haplotype map. This VCF
283 can be used to store fingerprints for downstream analyses or for use with Crosscheck. More information
284 is available at <https://github.com/broadinstitute/picard>

285 **Runtime and Memory requirements**

286 For BAM mode, running Crosscheck requires approximately 2.5 gb RAM for a single input pair of BAMs.
287 Runtime is dependent on the size of the input file. Based on our benchmarking experiments, runtimes
288 are < 10 minutes for DNase-seq, < 30s for ChIP-seq, and are on average about 2 hours for RNA-seq
289 datasets. For VCF mode, Crosscheck requires approximately 2.5 gb of ram for a single pair of inputs, with
290 runtimes < 30s using the standard hg19 haplotype map. CrosscheckFingerprints is multi-threading
291 enabled in order to speed up comparisons and fingerprint generation when multiple input pairs are
292 provided. All comparisons were conducted on Intel(R) Xeon(R) CPU E5-2680 v2 @ 2.80GHz processors.

293 **Map construction overview**

294 Maps are constructed from 1000 Genomes¹¹ phase 3(1000GP3) single-nucleotide polymorphisms(SNPs)
295 which are bi-allelic, phased, and have a minor allele frequency(MAF) $\geq 10\%$. This MAF threshold is
296 introduced since the expected maximal LOD contribution is obtained at an allele frequency of 0.50
297 (intuitively, rare variants are unlikely to be present in either of two samples being compared from
298 different individuals). Additionally, SNPs must not differ in their MAF by more than 10% between the 5
299 ancestral sub-populations(AFR, SAS, EAS, EUR, AMR) present in 1000GP3. This is to correct for potential
300 sub-population bias due to differing linkage and MAF frequency of SNPs across different populations.
301 Using PLINK2¹⁸, we pruned SNPs meeting these criteria in order to create an independent set of
302 "anchor" SNPs, between which no pairwise r^2 correlation exceeded a threshold of 0.10. A window size
303 of 10 kilobases(kb) and a slide of 5 SNPs was used for pruning. By creating this set of independent SNPs,
304 we ensure that individual haplotype blocks are independent from each other. Next, we greedily added
305 SNPs to the blocks represented by the anchor SNPs. Adding was done in order of LDScore¹⁹ of the
306 anchor SNPs, with the highest LDScoring anchor SNP first(LDScore is the sum for the r^2 correlations of
307 each SNP with all other SNPs within a 1 centimorgan window on either side). Recombination maps
308 containing mappings between genomic coordinates and recombination rates for both the hg19 and
309 GRCh38 assemblies were obtained from http://bochet.gcc.biostat.washington.edu/beagle/genetic_maps/ and http://mathgen.stats.ox.ac.uk/impute/1000GP_Phase3/. We only added SNPs if
310 their correlation with the anchor SNP has $r^2 \geq 0.85$ and they were located within a genomic window of
311 10,000 kb. In this way, we prioritize the creation of larger, more genetically informative blocks that span
312 several kb regions. The haplotype maps used for the ENCODE database analysis and benchmarking
313 along with the python code used to generate them, are available at: https://github.com/naumanjaved/fingerprint_maps.

316 **Constructing maps only containing LD blocks or single SNPs**

317 The map containing only single SNP blocks was constructed by aggregating all SNPs in the full haplotype
318 map not in strong linkage($r^2 \geq 0.85$) to other SNPs, resulting in 20792 SNPs. To construct the map
319 containing only blocks with size ≥ 2 used to quantify the benefits of accounting for linkage, we sub-
320 sampled the full haplotype map. Starting with the largest blocks by number of SNPs, blocks were
321 successively added to this map until the total number of SNPs approximately reached the number of
322 SNPs in the map containing only independent SNPs (20801).

323 **Testing set construction**

324 *281 ChIP-seq, RNA-seq, and DNase-seq datasets with ground-truth annotation*

325 To create a testing set of files to evaluate our method's performance and benchmark it against other
326 tools, we downloaded 281 hg19 bams from RNA-seq, DNase-seq, and ChIP-seq (targeting histone
327 modifications, CTCF, or POL2) from the ENCODE Tissue Expression (ENTEX) project. The ENTEX project
328 contains datasets from experiments on samples derived from four different tissue donors, each of which
329 has whole genome sequencing (WGS) data available. The WGS data for each donor can be used to verify
330 the nominal donor of each dataset comprising the testing set. For each dataset, the corresponding hg38
331 alignments were compared to the hg38 WGS alignments for its nominal donor. Only datasets which
332 yielded a positive LOD score > 5 using CrosscheckFingerprints (with the full hg38 version of haplotype
333 map) and a "match" result from NGSCheckMate were included in the testing set. The final testing set of
334 files and accompanying metadata are included in supplementary table S1.

335 *101 transcription factor and chromatin modifier (CM) ChIP-seq datasets without ground-truth
336 annotation*

337 To test Crosscheck and other methods on transcription factor and chromatin modifier datasets, we
338 downloaded 101hg19 ChIP-seq datasets from the ENCODE project. For these datasets, there was no
339 ground-truth donor sequencing data available for the nominal donor as there was for the ENTEX
340 datasets. In this case, the false-mismatch rate (incorrect genotyping call for a donor-matched pair)
341 cannot be assessed, since there is a non-negligible probability that one of the two datasets with the
342 same nominal donor annotation is incorrectly annotated. However, the false-match rate can still be
343 assessed, since we estimate that the probability that two datasets with different donor annotations may
344 actually share the same true donor is very low. Therefore, we only characterized the ability of
345 NGSCheckmate and Crosscheckfingerprint's to accurate classify donor-unmatched pairs for this testing
346 set. In the context of detecting sample swaps, this performance measure is also more relevant than the
347 accurate detection of donor-matched datasets. All datasets and accompanying metadata is available in
348 supplementary table S2.

349 **BAM pre-processing and down-sampling for benchmarking experiments**

350 Datasets were sorted using Samtools²⁰ and processed using Picard's MarkDuplicates tool with default
351 settings to remove duplicates. We noted that collapsing duplicates was especially important for RNA-seq
352 datasets since PCR bias can alter allele fractions and lead to incorrect sample classification.
353 Downsampling was conducted on the duplicate marked, sorted files using the command *samtools view -s seed.F* with a seed value of 5.

355 **Benchmarking with NGSC and Crosscheck**

356 To speed up analysis of a large number of bams with NGSCheckmate, we followed the author
357 recommendations¹⁰ and created VCFs for each input file using the default provided SNP panel from the
358 NGSCheckMate github and the command *samtools mpileup-l -uf hg19.fasta -l*
359 *SNP_GRCh37_hg19_woChr.bed sample.bam | bcftools call -c - > ./sample.vcf*. NGSC was then run in
360 batch mode using default settings with the hg19 reference SNP panel. For Crosscheck, we first used
361 Picard's ExtractFingerprint utility with default settings and the standard hg19 haplotype map to pre-
362 compute VCFs for each input bam. Comparisons were then conducted using Crosscheck's batch mode
363 with default settings and the standard hg19 map.

364 **Evaluation of other methods that assess genetic similarity between samples**

365 We considered the following methods:

- 366 • **HYSIS** is intended for tumor-normal concordance verification with a priori knowledge of
367 homozygous germline mutations in the normal tissue⁶. Without considerable modifications, HYSIS is
368 therefore not suitable to handle the general use case that Crosscheck is intended for.
- 369 • **Bam-matcher** is a tool intended for verifying genotype concordance for whole-genome sequencing,
370 whole exome sequencing, and RNA-sequencing data⁷. Bam-matcher calls programs such as GATK²¹
371 to call variants for each input BAM. Though the resulting variants can be cached to speed up future
372 comparisons, we did not find a way to easily call and store variants for each input bam in the testing
373 set, and without that, performing the hundreds of thousands of benchmarking comparisons
374 becomes unfeasible.
- 375 • We did apply the tools **Conpair** and **BAMixChecker** to the testing set. Conpair was run with default
376 settings using the standard hg19 SNP panel and the *-min-cov* parameter set to 1. Pileups were pre-
377 generated using GATK 4.1.7.0 with the recommended settings⁸. BAMixChecker was run with
378 standard settings for hg19⁹ and using GATK 4.1.6.0 for variant calling. Conpair outputs a genotype
379 concordance percentage, which should be <50% for different donor and above 80% for same donor
380 datasets. Any genotype concordance between 50 and 80% is considered inconclusive.
381 BAMixChecker outputs a concordance score between 0 and 1 with no explicit inconclusive range.
382 However, we found that BAMixChecker outputs a concordance score of exactly 0 when there is no
383 overlap between the SNP reference panel that the program uses and the input dataset. Therefore,
384 we labeled any result from BAMixChecker with a concordance score of 0 as an inconclusive
385 genotype call. We found that both methods were unable to yield a conclusive result for more than
386 25% of the comparisons even when the full datasets are considered, and the inconclusive rates
387 became even higher at the lower subsampling rates (Supplementary Fig. 1d). We reasoned that this
388 was likely due to poor overlap between the input datasets and the predefined reference panel of
389 SNPs that both methods use.

390

391 **Familial dataset acquisition and processing**

392 Paired fastqs for RNA-seq data from CEPH/Utah Pedigree 1463 were downloaded from the Gene
393 Expression Omnibus²² (accession GSE56961). Datasets for the following accessions were downloaded:
394 SRR8505344, SRR8505340, SRR8505343, SRR1258219, SRR1258220, SRR1258218, and SRR8505347.
395 Fastqs were aligned to the GRCh38 reference using STAR²³ 2.6.0c with default parameters. Before
396 analysis, bams were sorted using samtools and duplicate marked/collapsed using Picard's
397 MarkDuplicates. All comparisons were conducted using the default settings and SNP panels for the
398 GRCh38 assembly for each method.

399

400 **ENCODE data acquisition**

401 ENCODE metadata was downloaded from <https://www.encodeproject.org/>. Metadata was filtered to
402 yield accessions for hg19 ChIP-, RNA-, and DNase-seq ENCODE bams from donors with at-least four
403 datasets. These bams were downloaded from a Broad google bucket and processed(see below)with a
404 custom Workflow Description Language²⁴(WDL) script. All dataset accessions and associated metadata
405 are available in supplementary table S3.

406 **ENCODE data processing**

407 Files were first sorted using *samtools sort*, and filtered using BEDTools²⁵ in order to only keep reads
408 overlapping SNPs in the haplotype map. This facilitated efficient storage of files, resulting in
409 approximate 10-fold reduction in file size. Finally, duplicates were marked and removed for each file
410 using Picard's MarkDuplicates function with default settings. All comparisons were conducted using the
411 version of CrosscheckFingerprints available in commit #078b0ba of Picard.

412

413 **ENCODE genotyping strategy**

414 To detect mislabeled samples, each dataset is compared against a reference set of 3 samples that
415 provide a high quality representation of the "true" genotype for each ENCODE tissue donor. To
416 construct this reference set of samples, a self-LOD score is calculated for each sample by "comparing"
417 each file to itself. This score correlates with the dataset's overlap with the haplotype map, and the
418 highest self-LOD samples are those containing the most genetic information relevant for genotyping. To
419 ensure that the reference set of samples for each tissue donor does not contain any swapped samples,
420 all reference samples are compared against one another to ensure self-consistency, which is defined as
421 an LOD score greater than 5 for all three pairwise comparisons between the three samples. In the case
422 of one swapped sample in this reference set, two negative LOD scores and one positive LOD score will
423 be obtained. In this case, the next highest self-LOD scoring bam replaces the putative swap, and
424 representative concordance is re-assessed. This is repeated until a concordant set is found. More
425 complex patterns of swaps in the representative set are assessed on a case-by-case basis. Finally, all
426 reference samples across all nominal donors are compared against one another in order to identify
427 larger cross-donor swaps and preclude the possibility that all reference samples for a nominal donor are
428 actually swaps from the same true donor.

429 Each sample not in the reference set is compared against the top 3 representative samples for its
430 nominal donor. Samples yielding an LOD ≤ -5 against any of the top 3 representatives are flagged as
431 swaps for review, while those yielding an LOD score between -5 and 5 are flagged as inconclusively
432 genotyped.

433 **Contamination tests**

434 Varying numbers of randomly sampled reads from two unrelated ENCODE ChIP-seq datasets,
435 ENCFF005HON ENCFF007DFB, were mixed together to create simulated contaminated datasets. Each
436 mixed sample consisted of ~ 5 million reads and contained varying proportions of the original datasets
437 (at intervals of 10%). Mixed samples were then compared to ENCFF007NTA and ENCFF029GAR, which
438 are ChIP-seq datasets from the same donor as ENCFF005HON. Comparisons were conducted on VCF files
439 generated using Picard's ExtractFingerprint utility using Crosscheck's VCF mode with default settings.

440

441 Data availability

442 All data used for benchmarking and ENCODE analysis are available online at <https://encodedcc.org/>.
443 Specific accessions and relevant metadata for each of the benchmarking experiments are available in
444 tables S1 and S2. Accession IDs and metadata for all datasets from ENCODE analysis are available in
445 table S3. Haplotype maps used for benchmarking and ENCODE analysis are available at
446 https://github.com/naumanjaved/fingerprint_maps). RNA-seq data from CEPH/Utah Pedigree 1463
447 were downloaded from the Gene Expression Omnibus (<https://www.ncbi.nlm.nih.gov/geo/>) from series
448 GSE56961, using accession IDs: SRR8505344, SRR8505340, SRR8505343, SRR1258219, SRR1258220,
449 SRR1258218, and SRR8505347. 1000 Genome Phase 3 VCFs for hg19 and GRCh38 liftovers were
450 obtained from <ftp://ftp-trace.ncbi.nih.gov/1000genomes/ftp>. Recombination maps for hg19 and
451 GRCh38 liftovers were obtained from http://bochet.gcc.biostat.washington.edu/beagle/genetic_maps/.
452

452

453 Code availability

454 Crosscheck code and documentation is available at <https://github.com/broadinstitute/picard>.
455 Fingerprint map generation code, along with pre-compiled maps and documentation are available at
456 https://github.com/naumanjaved/fingerprint_maps.

457

458 References

- 459 1 Horbach, S. P. J. M. & Halfmann, W. The ghosts of HeLa: How cell line misidentification
460 contaminates the scientific literature. *PLOS ONE* **12**, e0186281 (2017).
- 461 2 Lorsch, J. R., Collins, F. S. & Lippincott-Schwartz, J. Fixing problems with cell lines. *Science* **346**,
462 1452-1453 (2014).
- 463 3 Biankin, A. V., Piantadosi, S. & Hollingsworth, S. J. Patient-centric trials for therapeutic
464 development in precision oncology. *Nature* **526**, 361-370(2015).
- 465 4 Danecek, P. et al. The variant call format and VCFtools. *Bioinformatics* **27**, 2156-2158 (2011).
- 466 5 Pengelly, R. J. et al. A SNP profiling panel for sample tracking in whole-exome sequencing
467 studies. *Genome Medicine* **5**, 89, doi:10.1186/gm492 (2013).
- 468 6 Schröder, J., Corbin, V. & Papenfuss, A. T. HYSYS: have you swapped your samples?
469 *Bioinformatics* **33**, 596-598 (2017).
- 470 7 Wang, P. P. S., Parker, W. T., Branford, S. & Schreiber, A. W. BAM-matcher: a tool for rapid NGS
471 sample matching. *Bioinformatics* **32**, 2699-2701 (2016).
- 472 8 Bergmann, E. A., Chen, B.-J., Arora, K., Vacic, V. & Zody, M. C. Conpair: concordance and
473 contamination estimator for matched tumor–normal pairs. *Bioinformatics* **32**, 3196-3198 (2016).
- 474 9 Chun, H. & Kim, S. BAMixChecker: an automated checkup tool for matched sample pairs in NGS
475 cohort. *Bioinformatics* **35**, 4806-4808 (2019).
- 476 10 Lee, S. et al. NGSCheckMate: software for validating sample identity in next-generation
477 sequencing studies within and across data types. *Nucleic Acids Research* **45**, e103 (2017).

478 11 A global reference for human genetic variation. *Nature* **526**, 68-74 (2015).

479 12 An Integrated Encyclopedia of DNA Elements in the Human Genome. *Nature* **489**, 57-74 (2012).

480 13 Regev, A. et al. The Human Cell Atlas. *eLife* **6**, e27041 (2017).

481 14 Network, CGAR et al. The Cancer Genome Atlas Pan-Cancer analysis project. *Nat. Genet.* **45**,
482 1113-1120 (2013).

483 15 Lonsdale, J. et al. The Genotype-Tissue Expression (GTEx) project. *Nat. Genet.* **45**, 580-585
484 (2013).

485 16 Slatkin, M. Linkage disequilibrium--understanding the evolutionary past and mapping the
486 medical future. *Nat. Rev. Genet.* **9**, 477-485, (2008).

487 17 Pfeiffer, F. et al. Systematic evaluation of error rates and causes in short samples in next-
488 generation sequencing. *Sci. Rep.* **8**, 1-14 (2018).

489 18 Chang, C. C. et al. Second-generation PLINK: rising to the challenge of larger and richer datasets.
490 *GigaScience* **4** (2015).

491 19 Bulik-Sullivan, B. K. et al. LD Score regression distinguishes confounding from polygenicity in
492 genome-wide association studies. *Nat. Genet* **47**, 291-295 (2015).

493 20 Li, H. et al. The Sequence Alignment/Map format and SAMtools. *Bioinformatics* **25**, 2078-2079
494 (2009).

495 21 Poplin, R. et al. Scaling accurate genetic variant discovery to tens of thousands of samples.
496 Preprint at doi:10.1101/201178 (2018).

497 22 Barrett, T. et al. NCBI GEO: archive for functional genomics data sets—update. *Nucleic Acids Res.*
498 **41**, D991-D995 (2013).

499 23 Dobin, A. et al. STAR: ultrafast universal RNA-seq aligner. *Bioinformatics* **29**, 15-21 (2013).

500 24 Voss, K., Gentry, J. & Auwera, G. V. d. Full-stack genomics pipelining with GATK4 + WDL +
501 Cromwell. *ISCB Comm J* **6**, 1381 (2017).

502 25 Quinlan, A. R. & Hall, I. M. BEDTools: a flexible suite of utilities for comparing genomic features.
503 *Bioinformatics* **26**, 841-842 (2010).

504

505 Acknowledgements

506 We would like to thank Jonathan Bloom for his contributions to the LOD score derivation. We thank Liz
507 Gaskell for helpful discussions and comments on the manuscript. N.S. and N.J. are supported by NHGRI
508 UM1HG009390.

509

510 Author Contributions

511 N.J. constructed the haplotype map. Y.F. and T.F. designed and wrote CrosscheckFingerprints. N.J., N.S.,
512 and Y.F. designed the experimental setup. N.J. and N.S. performed the analyses. C.E. and N.S. verified
513 genotyping findings. N.J., Y.F., B.E.B., and N.S. wrote the paper.

514 **Competing Interests**

515 The authors declare no competing financial interests.

516

517 **Correspondence**

518 Correspondence to Noam Shoresh

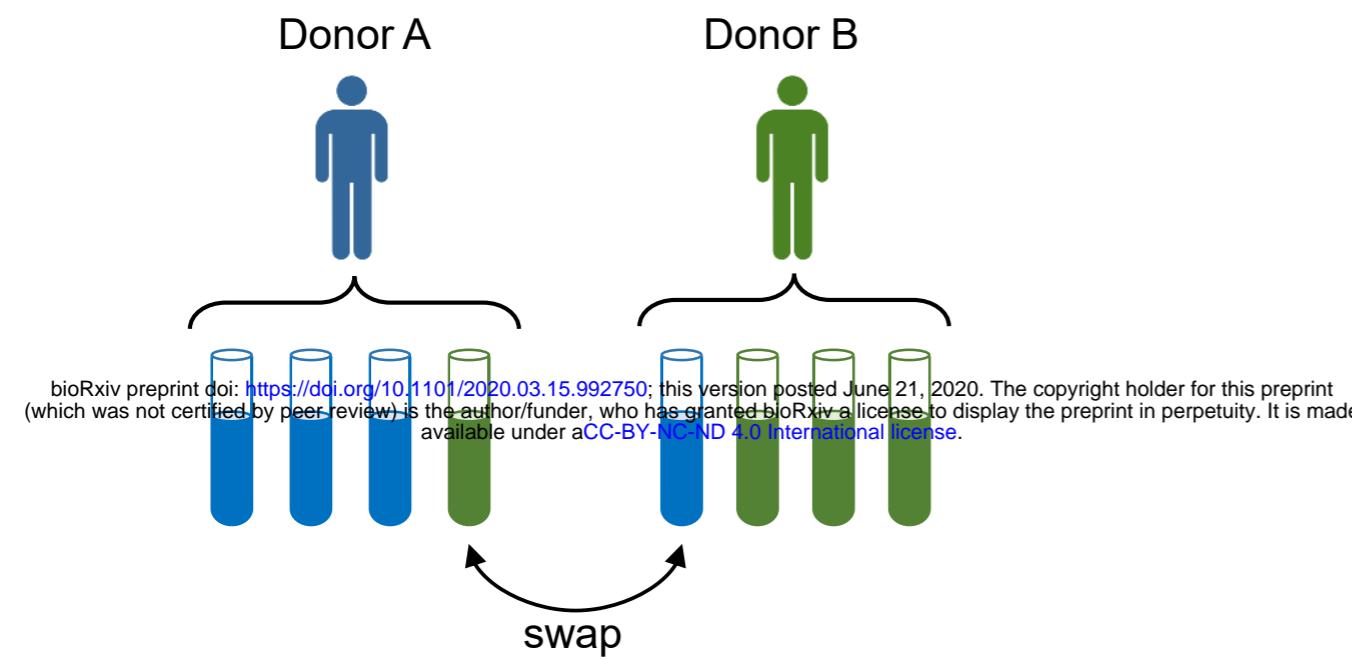
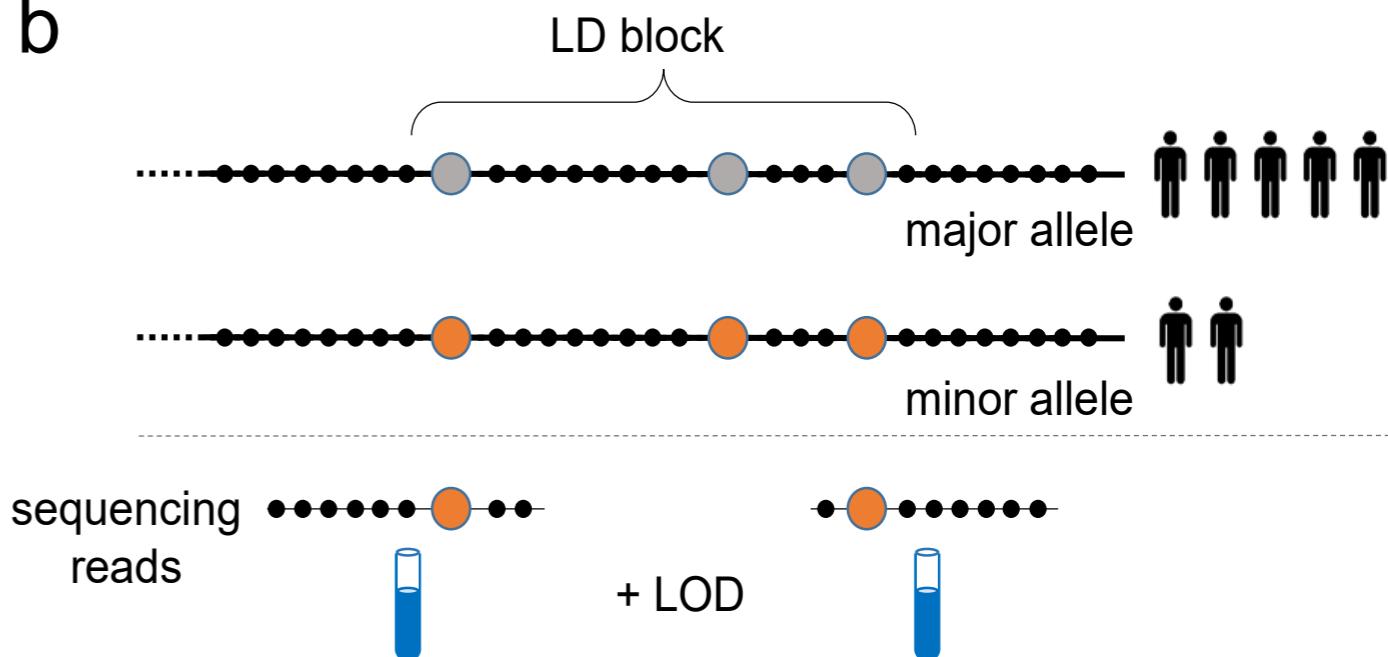
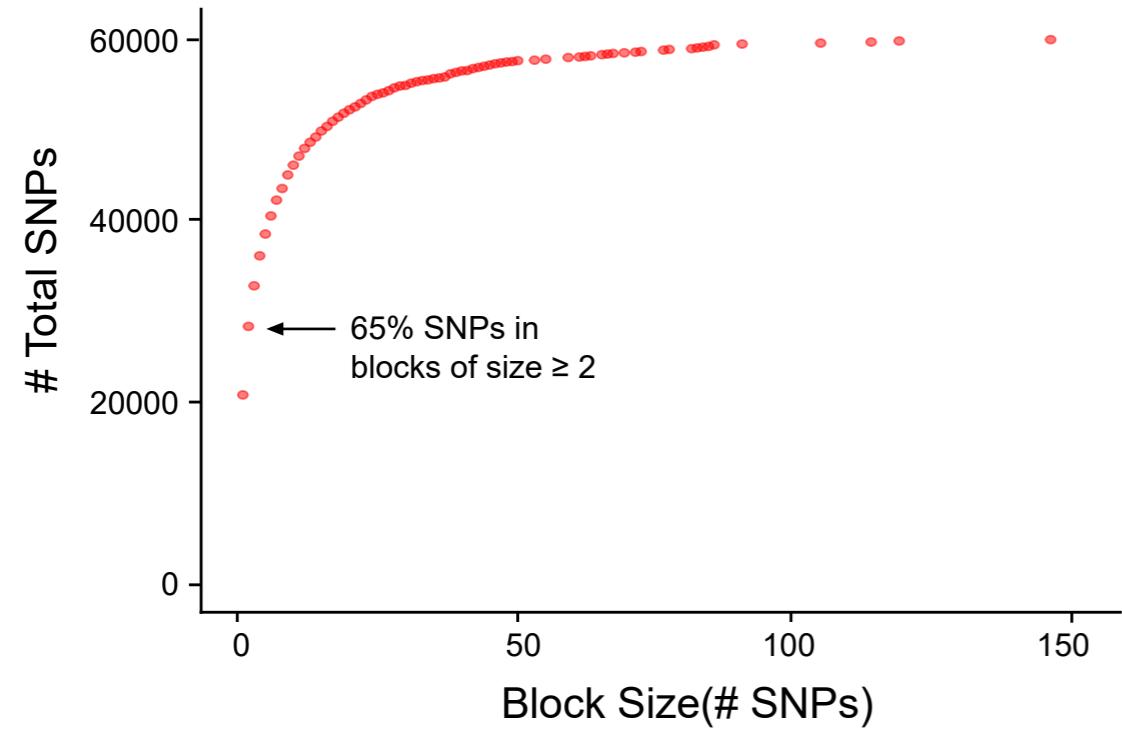
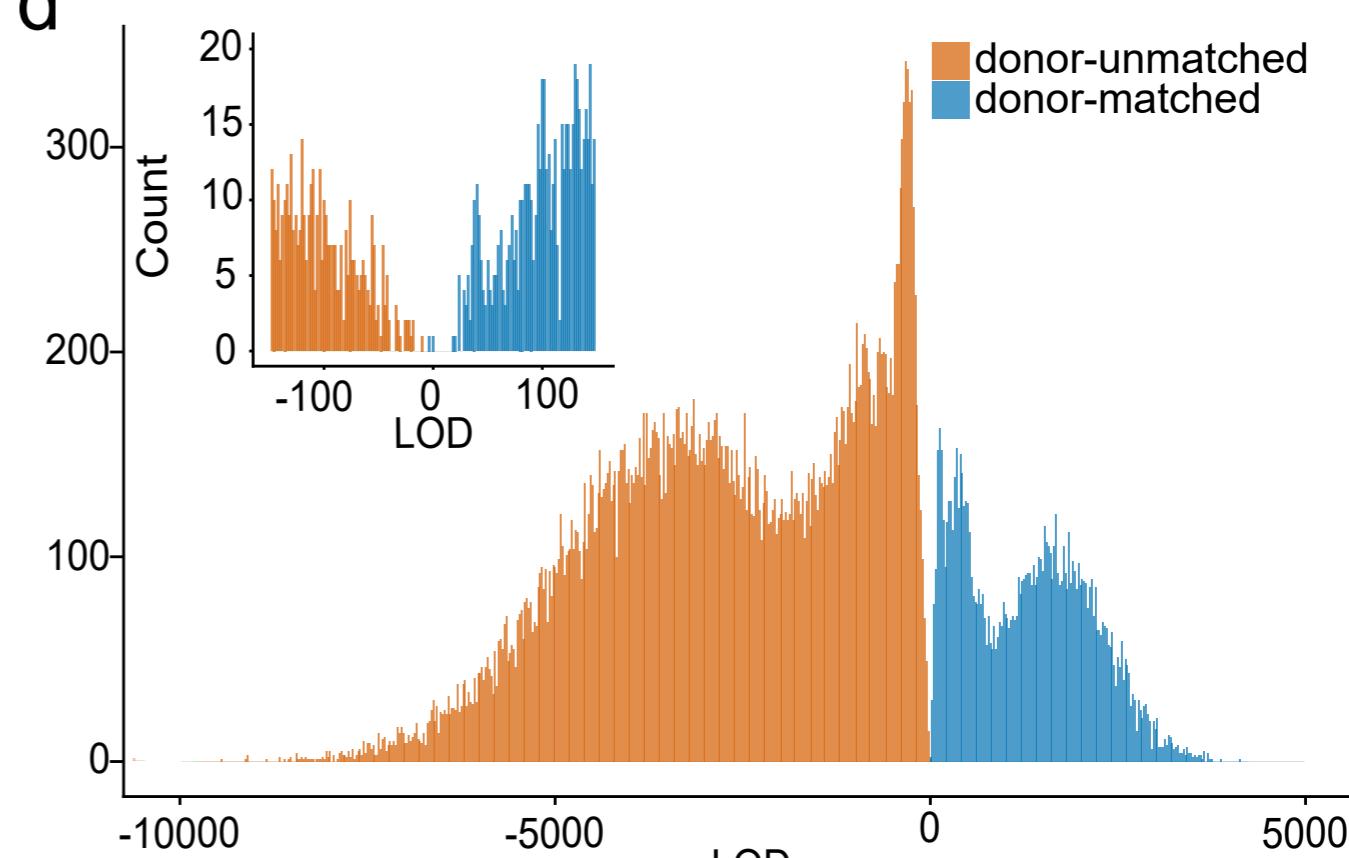
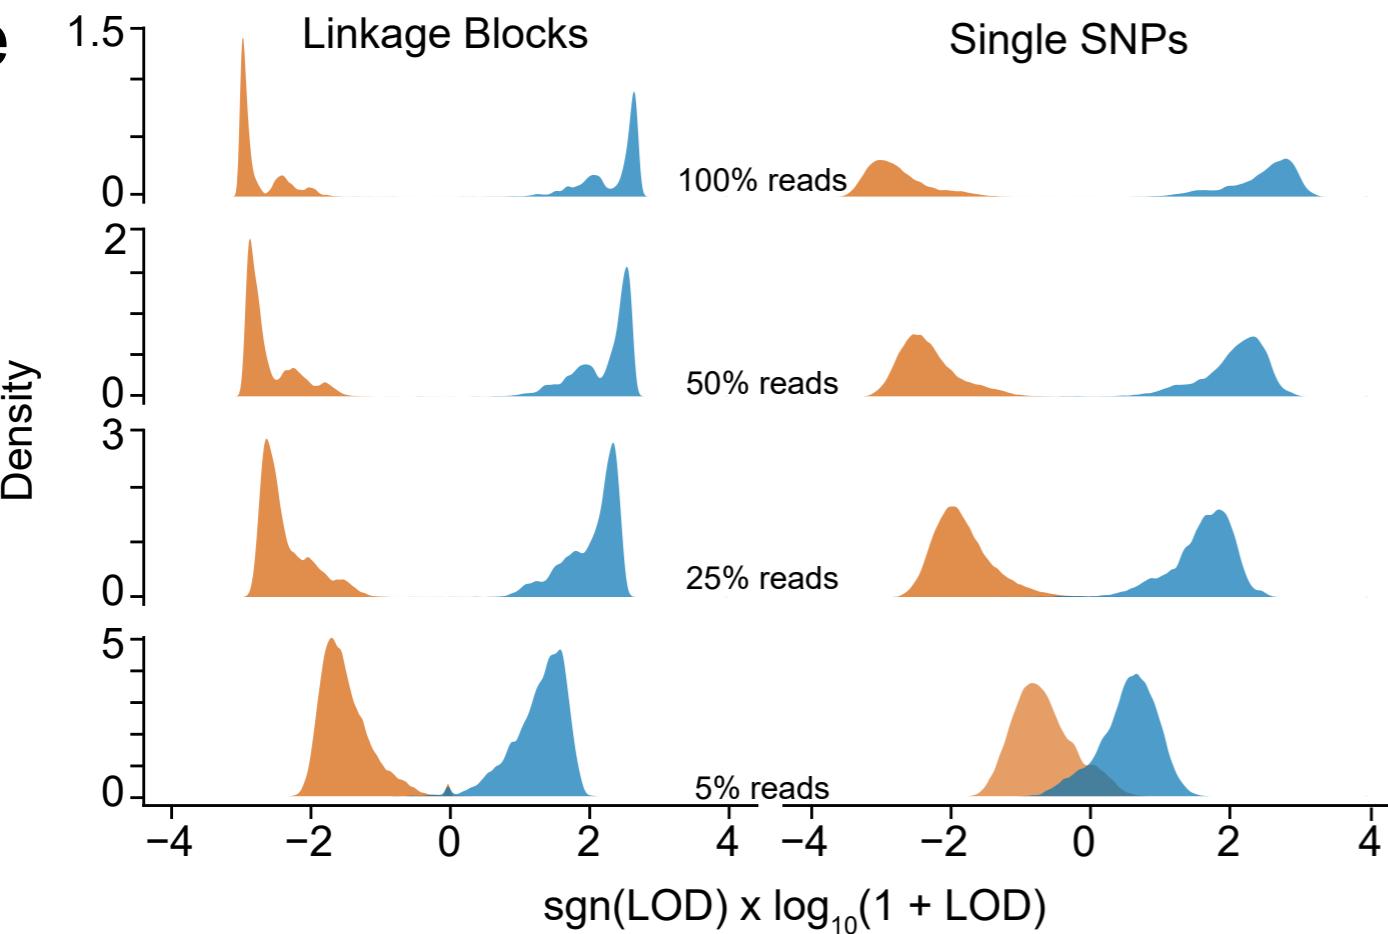
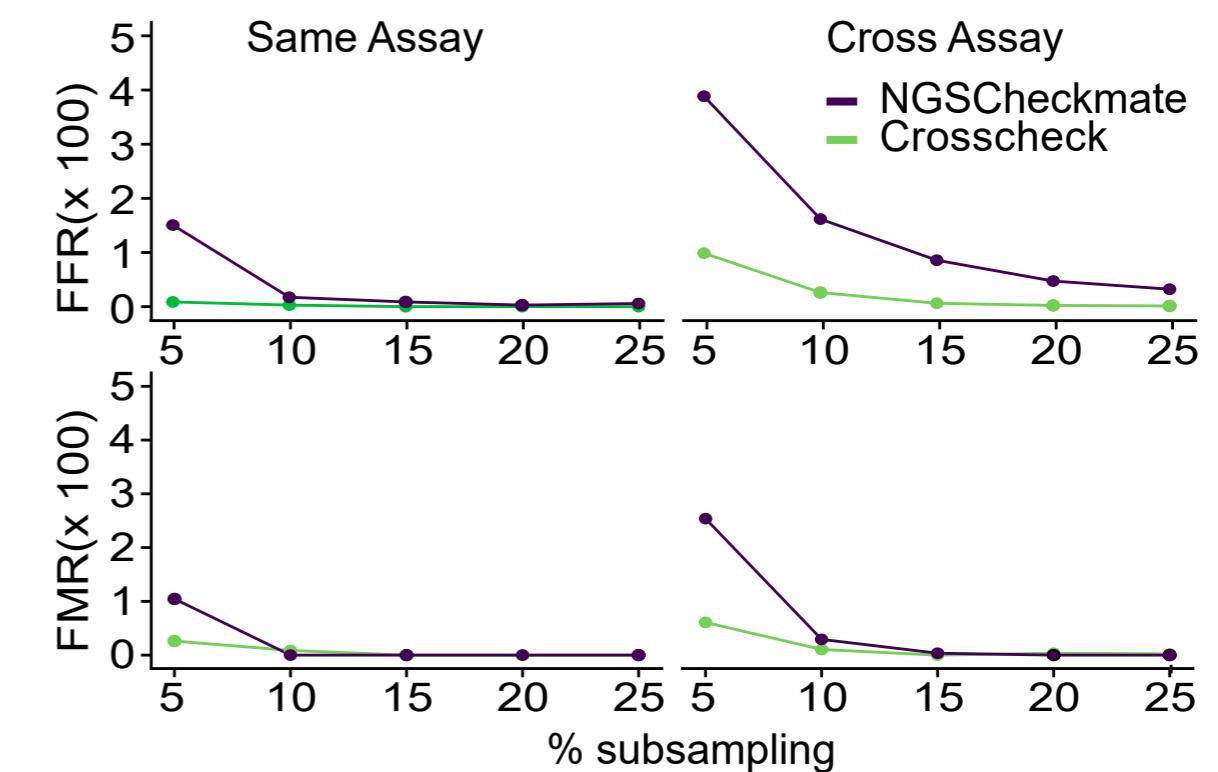
a**b****c****d****e****f**

Figure 1: Incorporating Linkage Information allows robust comparison of sequencing datasets. **(a)** Sample swaps and mis-annotations, where a sample is incorrectly attributed to the wrong donor, are a high stakes issue for large consortium projects and clinical science. **(b)** Our method compares reads from two datasets across a genome-wide set of linkage disequilibrium LD blocks (haplotype map). The single nucleotide polymorphisms (SNPs) in each block are highly correlated with each other and have low correlation with SNPs in other blocks. Reads overlapping any of the SNPs in a given block inform the relatedness of the datasets, even when reads from the two datasets do not overlap one another. **(c)** Haplotype maps contain many large LD blocks. LD blocks are created using common, ancestry independent SNPs from 1000 Genomes. Most SNPs lie within blocks of size > 2 , which boosts the chances of reads to be informative. **(d)** Distribution of LOD (log-odds ratio) scores for 34336 donor-mismatched (red) and 9767 donor-matched pairs (green) of public ChIP-, RNA-, and DNase-seq datasets from the ENCODE project. **(e)** LD-based method can correctly determine sample relatedness even at low sequencing coverage. Pairwise comparisons of reference dataset pairs at different sub-sampling percentages using two equally sized SNP panels – one panel contained only independent single SNPs, while the other contained only LD blocks. Donor-mismatched dataset pairs are colored red while donor-matched dataset pairs are green. **(f)** Comparison of NGSC and Crosscheck's classification of 34336 donor-mismatched and 9767 donor-matched dataset pairs. Performance was measured in terms of the false flag rate (FFR), the fraction of donor-matched pairs incorrectly flagged as donor-mismatches, and the false match rate (FMR), the fraction of donor-mismatched pairs incorrectly identified as donor-matches. Comparisons are classified as *same-assay* if the two datasets are from the same assay type, and have the same target epitope in the case of ChIP-seq datasets. All other comparisons are classified as *cross-assay*.



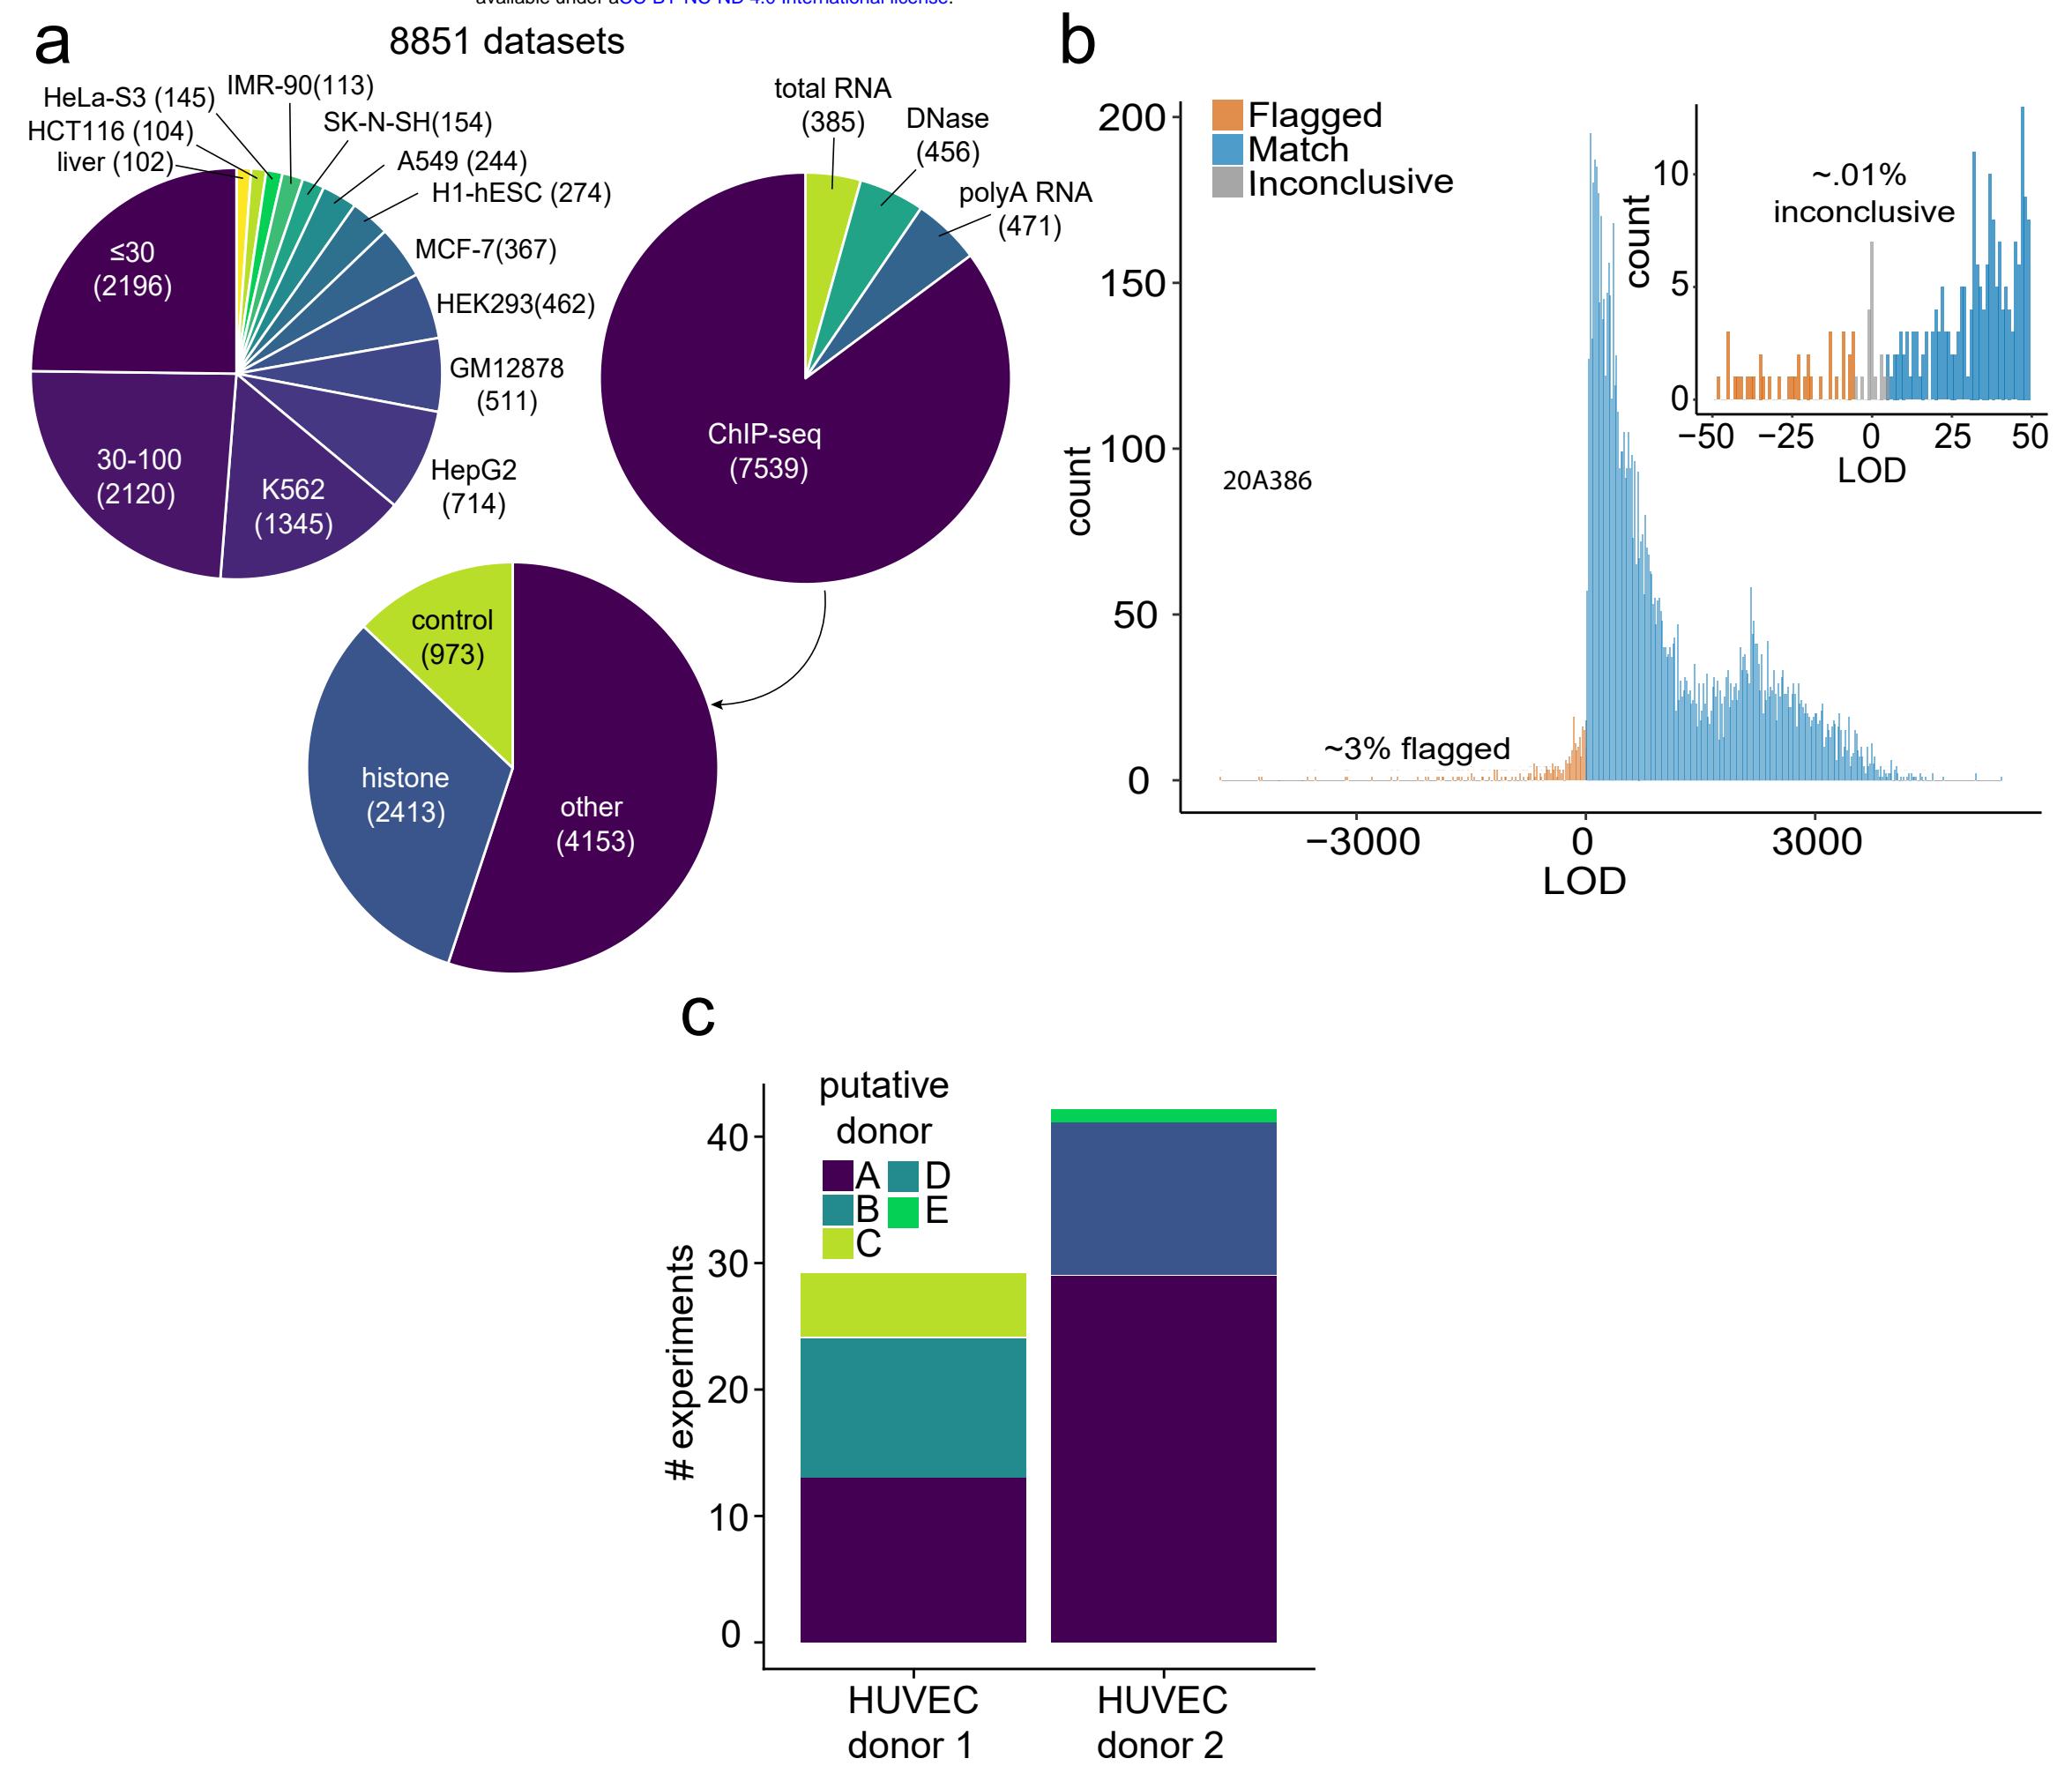



Figure 2: Overview of ENCODE database swap detection. **(a)** Overview of 8851 genotyped datasets from ENCODE, partitioned by cell type (top left), assay type (top right), and by target for ChIP-seq (bottom). Cell types that had less than 100 datasets derived from them were pooled – so all the datasets from them are grouped into one of two categories. All hg19 aligned reads from total RNA-, polyA RNA-, ChIP-, and DNase-seq experiments performed on samples belonging to donors with at-least four datasets in total were included in the analysis. All ChIP-seq targets, including histone modifications(HM), transcription factors (TF), chromatin modifiers (CM), CTCF, and control experiments were included. **(b)** Distribution of LOD scores from ENCODE genotyping. Each dataset was compared to three representative datasets from its nominal donor. Any dataset scoring negatively against any of the three representatives was flagged for further review. A comparison resulting in an LOD score between -5 and 5 was deemed inconclusive (insufficient evidence to indicate shared or distinct genetic origin). **(c)** Each flagged sample was compared to all other samples from its nominal donor, as well as the representatives for all other donors in our database to nominate true donor identity and identify genetically consistent sub-clusters. Comparisons of flagged samples between two HUVEC donors reveals 5 genetically distinct clusters.

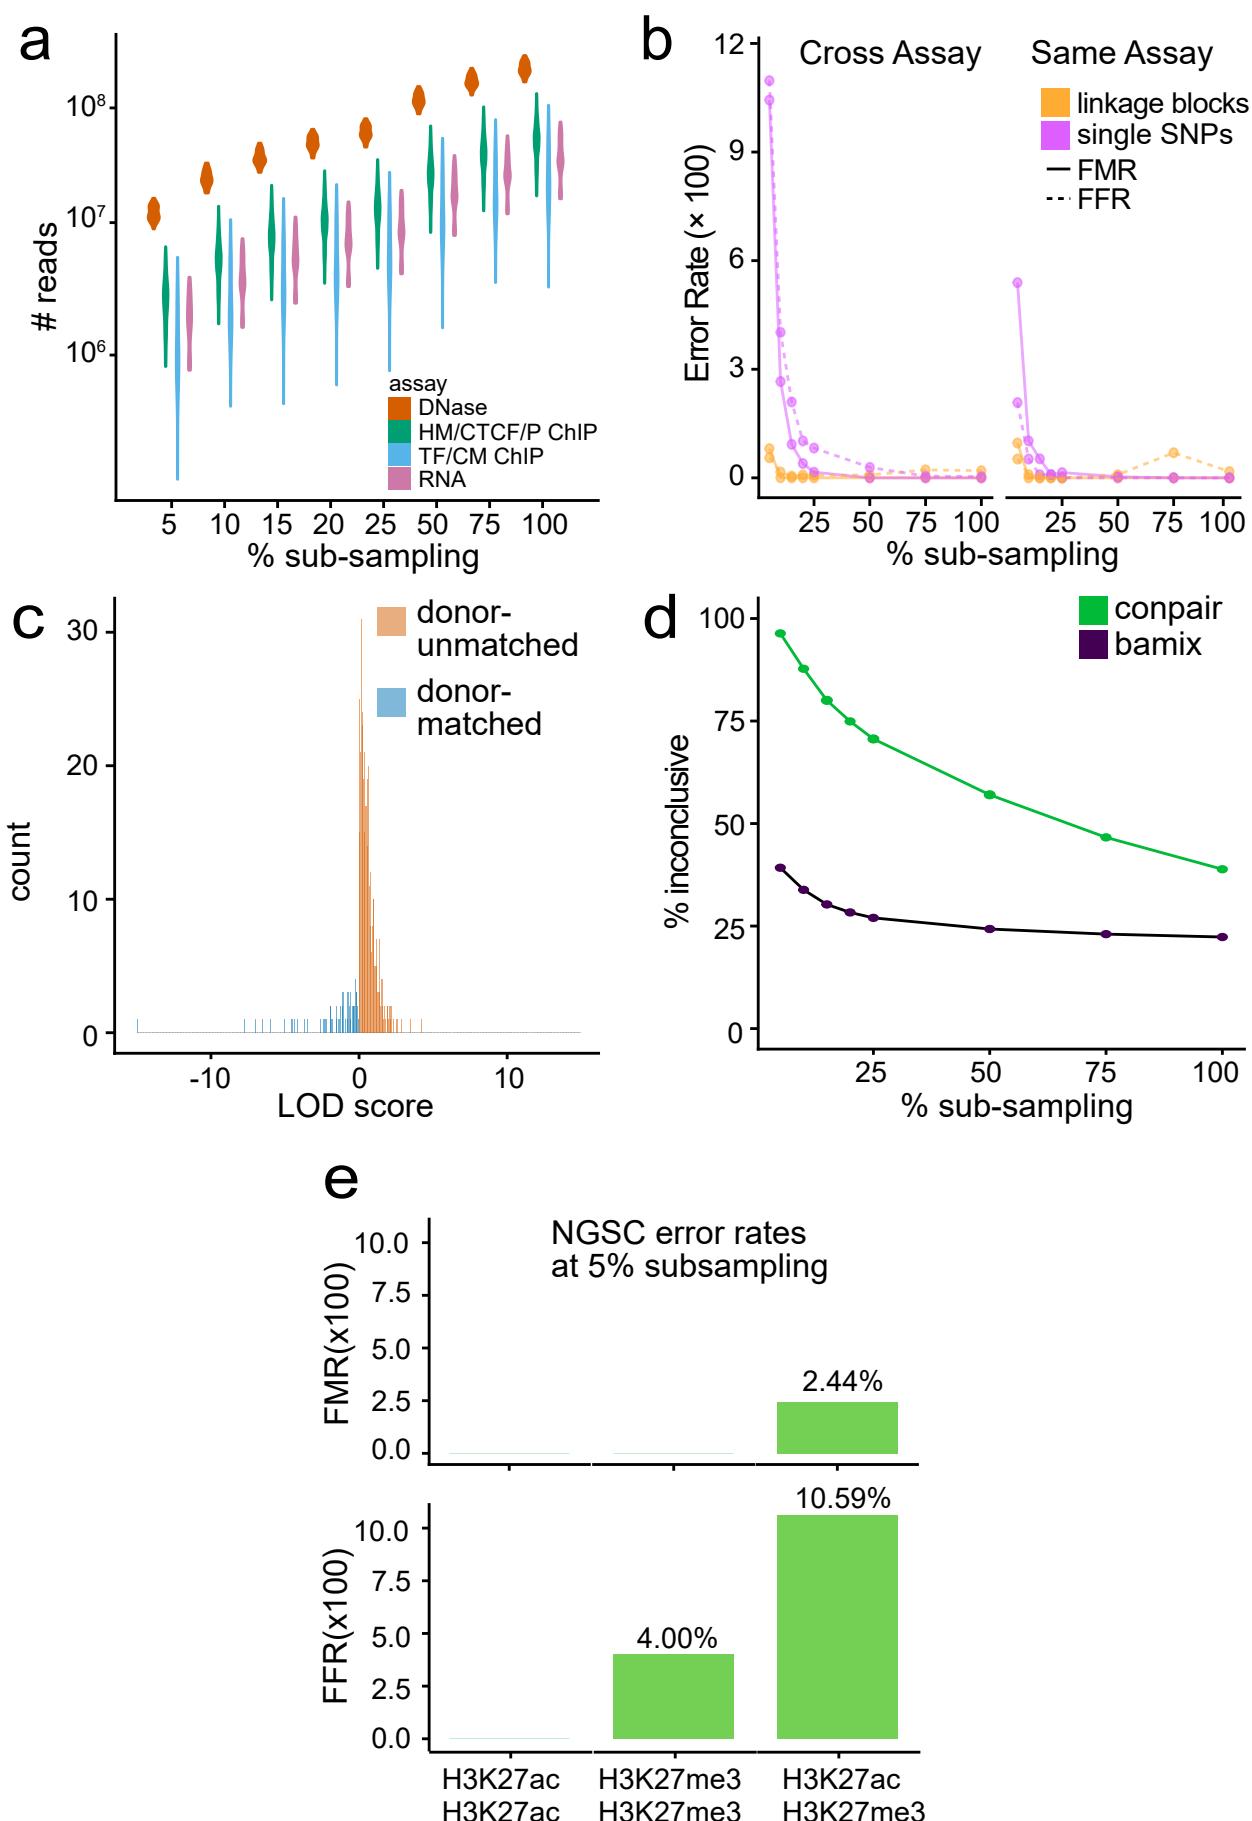

Supplementary Figure 1. **(a)** Distribution of number of reads in sub-sampled datasets used for benchmarking, broken down by assay type. ChIP datasets were divided into two classes – those which targeted transcription factor (TF) and chromatin modifier (CM), and those which targeted broad histone modifications (HM), POL2/POL2RA (P), or CTCF. **(b)** Comparison of percentage false match (FM) and false flag (FF) rates for 9767 same-donor and 34336 different donor pairwise comparisons using Crosscheck with either linkage blocks, or single SNPs only. Across different (left) and same (right) assay comparisons, incorporation of linkage information (orange line) decreases the FF and FM percentage, particularly at sub-sampling percentages. Comparisons are classified as *same-assay* if the two datasets are from the same assay type, and have the same target epitope in the case of ChIP-seq datasets. All other comparisons are classified as *cross-assay*. **(c)** Distribution of LOD scores from false flags and false matches from benchmarking experiments. The distribution of the majority (99%) of LOD scores from these misclassifications is used to create an “inconclusive” range of LOD scores, in which donor-match or mismatch cannot be confidently called. **(d)** Percent inconclusive genotype concordance calls for 9767 same-donor and 29573 different donor pairwise comparisons using Compair and BAMixChecker. “Inconclusive” is defined as pairwise comparisons resulting in genotype concordances between 50 and 80% for Compair, and a score of 0 for BAMixChecker. **(e)** FMR and FFR for NGSC at 5% subsampling for pairwise comparisons between ChIP-seq datasets targeting the non-overlapping histone modifications H3K27ac and H3K27me3. NGSC performs worse for comparisons between H3K27ac and H3K27me3 datasets (n=41 donor-matched, n=85 donor-mismatched) than for comparisons between two H3K27ac (n=24 donor-matched, n=67) or two H3K27me3 datasets (n=11 donor-matched, n=25 donor-mismatched). In contrast, Crosscheck classifies all pairs correctly.

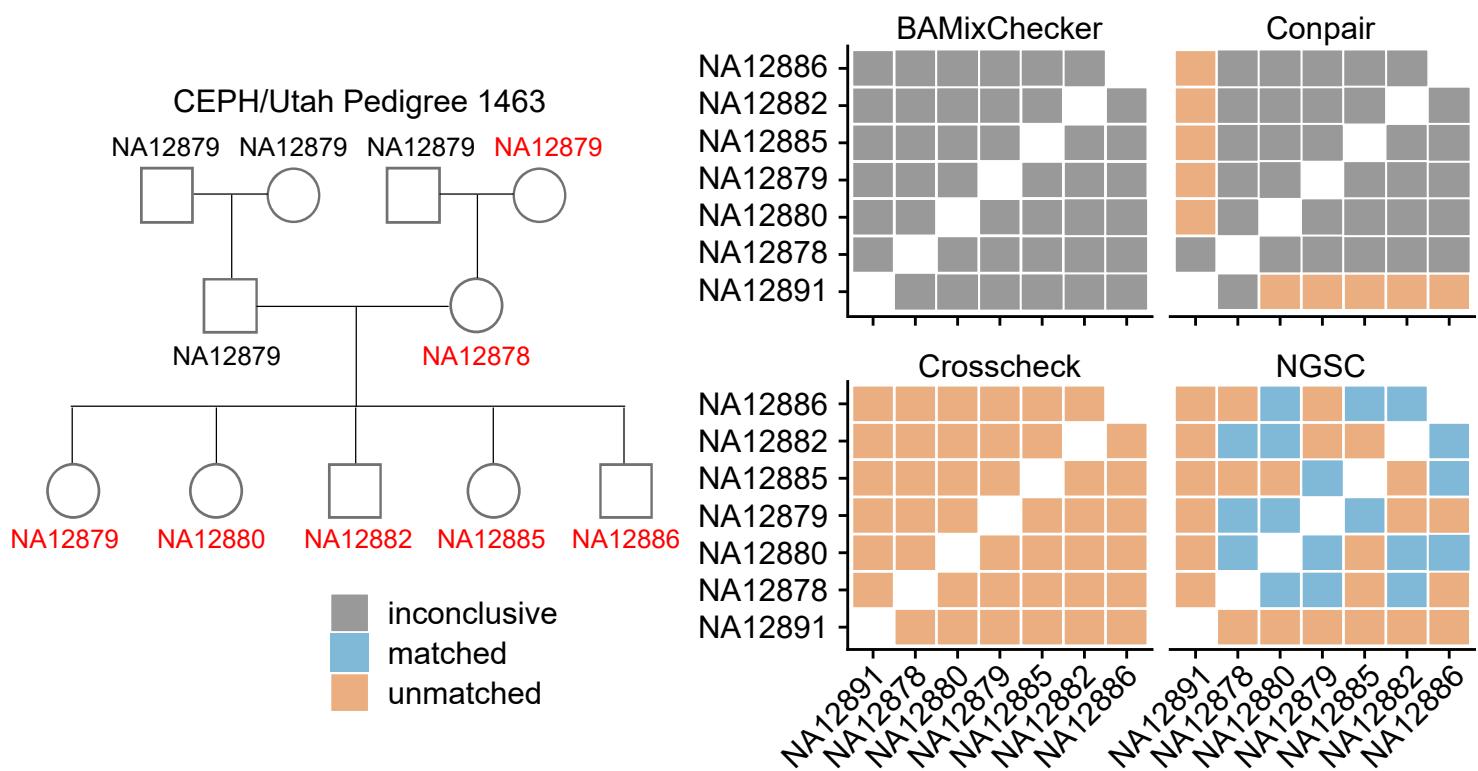

Supplementary Figure 2: Performance of NGSC, Crosscheck, BAMixChecker, and Conpair on familial datasets. Each method was used to classify 21 pairwise comparisons between RNA-seq datasets from 7 related individuals (indicated in red) from CEPH/Utah pedigree 1463. “Inconclusive” is defined as pairwise comparisons resulting in genotype concordance between 50 and 80% for Conpair, a score of 0 for BAMixChecker, and an LOD score between -5 and 5 for Crosscheck. NGSC incorrectly classifies 43% of pairs, while Conpair and BAMixChecker are inconclusive for 76 and 100% of pairs respectively. In contrast, Crosscheck correctly classifies all dataset pairs as mismatches.

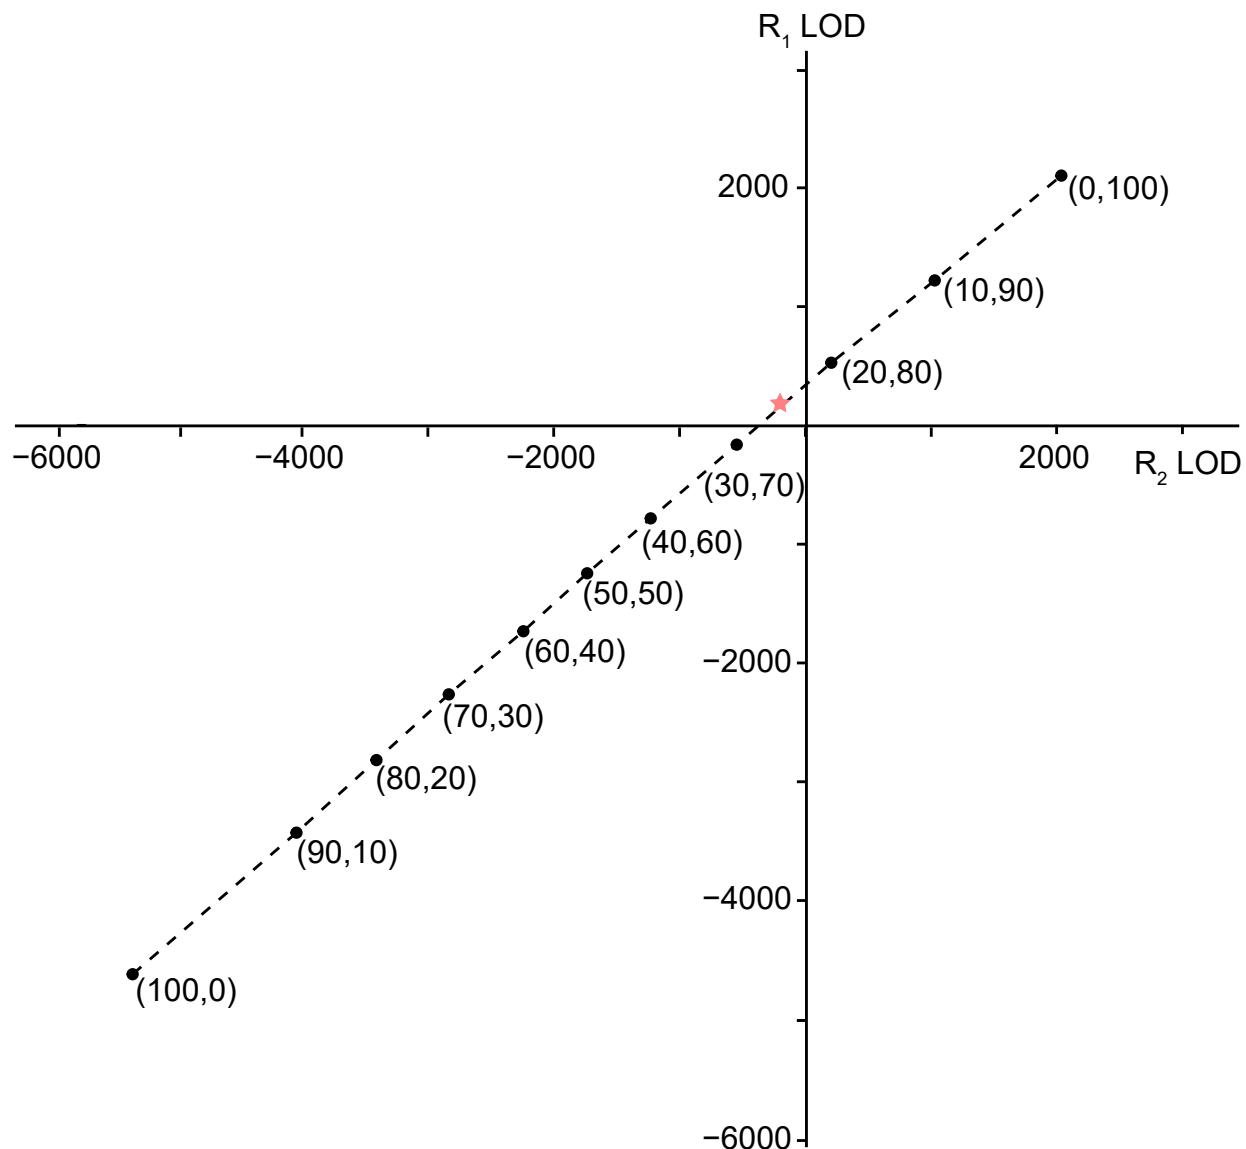

Supplementary Figure 3: Demonstration of Crosscheck's performance for contaminated datasets. Simulated contaminated datasets were created by combining various proportions of two ENCODE ChIP-seq datasets derived from two different donors: ENCFF005HON and ENCFF007DFB. Proportions of reads deriving from ENCFF005HON and ENCFF007DFB respectively are indicated in parentheses for each mixture. Each mixture was compared to two datasets derived from the same donor as ENCFF005HON, ENCFF007NTA (R_1) and ENCFF029GAR (R_2). The star indicates a region where a contaminated sample can score as a donor match against one dataset (R_1), but score as a donor mismatch against a different dataset from the same donor (R_2).