

A reusable benchmark of brain-age prediction from M/EEG resting-state signals

Denis A. Engemann^{*a,b,c}, Apolline Mellot^b, Richard Höchenberger^b, Hubert Banville^{b,h}, David Sabbagh^{b,d}, Lukas Gemein^{e,f}, Tonio Ball^{e,g}, Alexandre Gramfort^b

^a Roche Pharma Research and Early Development, Neuroscience and Rare Diseases, Roche Innovation Center Basel, F. Hoffmann–La Roche Ltd., Basel, Switzerland

^b Université Paris-Saclay, Inria, CEA, Palaiseau, France

^c Max Planck Institute for Human Cognitive and Brain Sciences, Department of Neurology, D-04103, Leipzig, Germany

^d Inserm, UMRS-942, Paris Diderot University, Paris, France

^e Neuromedical AI Lab, Department of Neurosurgery, Medical Center – University of Freiburg, Faculty of Medicine, University of Freiburg, Engelbergerstr. 21, 79106, Freiburg, Germany

^f Neurorobotics Lab, Computer Science Department – University of Freiburg, Faculty of Engineering, University of Freiburg, Georges-Köhler-Allee 80, 79110, Freiburg, Germany

^g BrainLinks-BrainTools Cluster of Excellence, University of Freiburg, Freiburg, Germany

^h InteraXon Inc., Toronto, Canada

Correspondence: [*denis.engemann@roche.com](mailto:denis.engemann@roche.com)

Keywords

clinical neuroscience, brain age, electroencephalography, magnetoencephalography, machine learning, population modeling, Riemannian geometry, , random forests, deep learning

Highlights

- We provide systematic reusable benchmarks for brain age from M/EEG signals
- The benchmarks were carried out on M/EEG from four countries > 2500 recordings
- We compared machine learning pipelines capable of handling the non-linear regression task of relating biomedical outcomes to M/EEG dynamics, based on classical machine learning and deep learning
- Next to data-driven methods we benchmarked template-based source localization as a practical tool for generating features less affected by electromagnetic field spread
- The benchmarks are built on top of the MNE ecosystem and the braindecode package and can be applied on any M/EEG dataset presented in the BIDS format

Abstract

Population-level modeling can define quantitative measures of individual aging by applying machine learning to large volumes of brain images. These measures of brain age, obtained from the general population, helped characterize disease severity in neurological populations, improving estimates of diagnosis or prognosis. Magnetoencephalography (MEG) and Electroencephalography (EEG) have the potential to further generalize this approach towards prevention and public health by enabling assessments of brain health at large scales in socioeconomically diverse environments. However, more research is needed to define methods that can handle the complexity and diversity of M/EEG signals across diverse real-world contexts. To catalyse this effort, here we propose reusable benchmarks of competing machine learning approaches for brain age modeling. We benchmarked popular classical machine learning pipelines and deep learning architectures previously used for pathology decoding or brain age estimation in 4 international M/EEG cohorts from diverse countries and cultural contexts, including recordings from more than 2500 participants. Our benchmarks were built on top of the M/EEG adaptations of the BIDS standard, providing tools that can be applied with minimal modification on any M/EEG dataset provided in the BIDS format. Our results suggest that, regardless of whether classical machine learning or deep learning was used, the highest performance was reached by pipelines and architectures involving spatially aware representations of the M/EEG signals, leading to R^2 scores between 0.60-0.71. Hand-crafted features paired with random forest regression provided robust benchmarks even in situations in which other approaches failed. Taken together, this set of benchmarks, accompanied by open-source software and high-level Python scripts, can serve as a starting point and quantitative reference for future efforts at developing M/EEG-based measures of brain aging. The generality of the approach renders this benchmark reusable for other related objectives such as modeling specific cognitive variables or clinical endpoints.

Introduction

- 1 Aging-related disorders of the central nervous system affect hundreds of millions of patients,
- 2 their caregivers and national health services. Over the past decades, important progress has
- 3 been made in clinical neuroscience, resulting in improvements to clinical diagnosis and
- 4 treatment (Walhovd et al. 2010; Ewers et al. 2011). Backed by increasingly advanced
- 5 analytical methods, this has enabled fine-grained characterization of neurodegenerative
- 6 conditions (Gaubert et al. 2019; Schumacher et al. 2021; Güntekin et al. 2021). Yet, from a
- 7 public-health perspective, rather than focusing on pathology, it is essential to detect risk

factors early within the general population in order to provide actionable feedback for preventive medicine, e.g., by targeting life-style changes. Such predictions are still challenging. Could it be helpful to look at biological rather than chronological age to better estimate the risk of declining brain health?

Recently, brain age has emerged as a concept for estimating biological aging in the general population (James H. Cole and Franke 2017; Liem et al. 2017; Dosenbach et al. 2010). Biological aging can be inferred from the genome via telomere length, mitochondrial function, epigenetics and other cellular features (Ferrucci et al. 2020; Mather et al. 2011). Yet, the age of a person is only a noisy measure of these cellular processes (people of the same chronological age can have different biological ages). At the same time, biological aging affects brain structure and function (K. S. King et al. 2014), inducing loss of brain volume (Driscoll et al. 2009; Scailh et al. 2003) and characteristic changes in neuronal activity (Cabeza et al. 2002; Damoiseaux et al. 2008; Babiloni et al. 2006). A proxy of biological aging can, thus, be obtained by mapping chronological age to brain data from large populations of subjects using machine learning (Liem et al. 2017; Dadi et al. 2021). The resulting models can be used to compute an expectation of a person's age given her brain data. This is achieved by quantitatively comparing that person's brain data to the distribution of brain data across different ages within the general population. This statistical expectation can tell how old (or young) a brain "looks" (Spiegelhalter 2016), hence, predicting the risk of neurological complications potentially more precisely than the chronological age.

This empirical measure of biological aging derived from the general population has proven a useful marker of neurodegeneration and cognitive decline in clinical populations (Cole et al. 2018; Raffel et al. 2017; Denissen et al. 2021; Gonneaud et al. 2021). In these cohorts, patients typically appear to have older brains than their chronological age would suggest. Importantly, similar trends emerge when evaluating brain age in the general population where elevated brain age, compared to chronological age, has been associated with lower cognitive capacity, well-being, and general health (Dadi et al. 2021; Cole 2020; Wrigglesworth et al. 2021). Yet, so far, this approach has mainly been based on anatomical brain scans and hemodynamic signals obtained from magnetic resonance imaging (MRI). This limits the broad utility of brain age for public health, as cerebral MRI scans are usually collected when there is an indication, which can be too late. Even when people from the general population are motivated to participate in brain research, this only concerns a small fraction of society: MRI devices and neuroscientific studies are not equally accessible in all regions of the world and do not attract all people equally from within society, potentially leading to selection bias (Fry et al. 2017).

New hope to generalize this approach has been sparked by advances in large-scale modeling of biomedical outcomes from non-invasive electrophysiological data including

magnetoencephalography (MEG) and electroencephalography (EEG) (Gaubert et al. 2019; Engemann et al. 2018). This line of research in clinical neurology may help develop assessments of brain health in many additional contexts in which MRI cannot be applied. First MEG-based brain-age models have allowed to validate MEG-derived brain age against MRI-derived brain age. Results from several studies have shown that the MEG- and MRI-derived brain age are statistically related, leading to overlapping correlations between ensuing brain age estimates (Engemann et al. 2020; Sabbagh et al. 2020; Xifra-Porxas et al. 2021) and individual differences in cognition and health. This overlap can be explained by electromagnetic field spread, independently of neuronal activity: As brain structure changes due to aging, cortical activity, even if unchanged, will project differently onto the M/EEG sensor array, making age indirectly decodable (Sabbagh et al. 2020). Importantly, multiple articles have found that neuronal activity captured by MEG adds specific information not present in MRI-derived brain age (Engemann et al. 2020; Xifra-Porxas et al. 2021), leading to improved prediction performance and richer neurocognitive characterization (Engemann et al. 2020). While MEG can provide an important discovery context, it is unlikely to be the right instrument for addressing the availability issues of MRI-based brain age as MEG scanners are even rarer than MRI scanners. In this context, EEG can make a true difference as EEG is economical and allows for flexible instrumentation for neural assessments in a wide range of clinical and real-world situations including at-home assessments. First evidence suggests that MEG-based strategies for brain-age modeling can be translated to EEG. In an earlier publication (Engemann et al. 2020) we found that among many alternative features of varying data-processing complexity, the spatial distribution of cortical power spectra in the beta (13-30Hz) and alpha (8-13Hz) frequency band explained most of the MEG's performance as brain-age regressor. This type of information can be well accessed without source localization from the sensor-space covariance using spatial filtering approaches or Riemannian geometry (Sabbagh et al. 2020; D. Sabbagh et al. 2019), which has led to successful translation of this MEG-derived strategy to clinical EEG with around 20 electrodes (David Sabbagh et al. 2020). In clinical and real-world contexts in which EEG is frequently collected, fine-grained spatial information may not be present as only a few electrodes are used. This has favored alternative EEG-derived brain-age models focusing on a wealth of spectral and temporal features (Al Zoubi et al. 2018) which may perform better on sparse EEG-montages and has enabled sleep-based brain age measures (Sun et al. 2019; Ye et al. 2020). These results provide a sense of the flexibility and future potential of EEG-based brain age as a widely applicable real-world measure of brain health. Yet, to fully develop this research program, more and richer evidence is desirable. At this point, comparisons between different machine learning strategies are difficult. Most models were not only developed and validated in one specific context, but their implementations and data-processing routines are dataset-

specific. Moreover, general machine learning approaches successful at pathology decoding should be well-suited for brain age modeling too, yet they have never been tested for that purpose (Gemein et al. 2020; Banville et al. 2020; Engemann et al. 2018). This makes it hard to know whether any strategy is globally optimal and where specific strategies have their preferred niche. As a result, uncertainty is added to comparisons between MEG, EEG and MRI, slowing down efforts of validating M/EEG-based brain age. Finally, to mitigate the impact of selection bias concerning the subjects investigated, it will be crucial to analyze many, socially and culturally diverse M/EEG datasets and find representations that are invariant to confounding effects that can raise issues of fairness and racial bias if remaining unaddressed (Choy, Baker, and Stavropoulos 2021). To develop the next generation of M/EEG-derived brain age models, to facilitate processing of larger numbers of diverse M/EEG-data resources and to avoid fragmentation of research efforts, standardized software and reusable benchmarks are needed.

In this paper we wish to make a first step in that direction. We provide reusable brain-age-prediction benchmarks for different machine learning strategies validated on multiple M/EEG datasets from different countries. The benchmarks are built on top of highly standardized dataset-agnostic code enabled by the BIDS standard (Gorgolewski et al. 2016; Niso et al. 2018; Appelhoff et al. 2019). This makes the benchmarks easy to extend in the future for additional datasets. The paper is organized as follows. The method section motivates the choice of the different machine learning benchmarks. The general data processing approach and software developed for this contribution are presented in the context of the benchmark. The selection of datasets is motivated, and datasets are then described in detail and compared regarding key figures that could provoke differences between benchmarks. Dataset-specific processing steps and peculiarities are highlighted. Then a model validation strategy is developed. The results section presents benchmarks on prediction performance across machine learning models and datasets and different performance metrics. The discussion inspects differences between models, modalities, and datasets, identifying unique niches, safe bets as well as unresolved challenges. The work concludes with practical suggestions on additional benchmarks that can be readily explored using the proposed tools and resources. The scripts and library code for this benchmark are publicly available on GitHub¹.

¹ <https://github.com/meeg-ml-benchmarks/meeg-brain-age-benchmark-paper>

Methods

Brain age benchmarks

Many different approaches exist for ML in neuroscience, and it can be hard to select among them. The following categorization may help orient practical reasoning and study design. What varies in the taxonomy of methods discussed below is how much M/EEG data are statistically summarized before being presented to the learning algorithm. In other words, ML methods vary with respect to the extent to which compression and summary of the M/EEG signals is performed by the learning algorithm vs. feature-defining procedures performed before and independently of the machine learning algorithm.

A-priori defined, a.k.a. handcrafted, features

The first category represents approaches in which features are inspired by theoretical and empirical results in neuroscience or neural engineering. Here, M/EEG is summarized in a rigid fashion by global aggregation across sensors, time, and frequencies or by visiting specific regions of interest (Gemein et al. 2020; Sitt et al. 2014; Engemann et al. 2018). A meaningful composition of features requires prior knowledge of the (clinical) neuroscience literature, especially when interpretation of the model is a priority. In practice, it is convenient to extract all or the most relevant features discussed in a given field, apply multiple spatial and temporal aggregation strategies, and then bet on the capacity of the learning algorithm to ignore irrelevant features (Sitt et al. 2014). This motivates the use of tree-based algorithms like random forests (Breiman 2001) that are easy to tune, can fit nonlinear functions (higher-order interaction effects), and are relatively robust to the presence of uninformative features. As local methods that can be seen as adaptive nearest neighbors (Hastie et al. 2005), the predictions of random forests and related methods are bounded by the minimum and maximum of the outcome in the training distribution. For clinical neuroscience applications, this has proven to yield robust off-the-shelf prediction models that are relatively unaffected by noise in the data and in the outcome (Engemann et al. 2018). This approach is also a natural choice when using sparse EEG-montages with few electrodes.

Here we implemented a strategy pursued in (Gemein et al. 2020) and (Banville et al. 2020), aiming at a broad set of different summary statistics of the time-series or the power spectrum. This approach has turned out useful for a pathology detection task in which the labeling of EEG as pathological can be due to different clinical reasons, hence, affecting many different EEG signatures in potentially diffuse ways. Features were computed using the MNE-features package (Schiratti, Le Douget, Van Quyen, et al. 2018). More specifically we used as features (each computed for individual channels and concatenated across channels, and then averaged across epochs): the standard-deviation, the kurtosis, the skewness, the

different quantiles (10%, 25%, 75%, 90%), the peak-to-peak amplitude, the mean, the power ratios in dB among all frequency bands (0 to 2Hz, 2 to 4Hz, 4 to 8Hz, 8 to 13Hz, 13 to 18Hz, 18 to 24Hz, 24 to 30Hz and 30Hz to 49Hz), the spectral entropy (Inouye et al. 1991), the approximate and sample entropy (Richman and Moorman 2000), the temporal complexity (Roberts, Penny, and Rezek 1999), the Hurst exponent as used in (Devarajan et al. 2014), the Hjorth complexity and mobility as used in (Päivinen et al. 2005), the line length (Esteller, Echauz, et al. 2001), the energy of wavelet decomposition coefficients as proposed in (Teixeira et al. 2011), the Higuchi fractal dimension as used in (Esteller, Vachtsevanos, et al. 2001), the number of zero crossings and the SVD Fisher Information (per channel) (Roberts, Penny, and Rezek 1999).

Covariance-based filterbank approaches

This category represents approaches in which the spatial dimension of M/EEG is fully exposed to the model, whereas temporal or spectral aspects of the signal are to some extent summarized before modeling. As M/EEG signals reflect linear superposition of neuronal activity projected to the sensors through linear field/potential spread, it is natural to use linear (additive) models for adaptively summarizing the spatial dimension of M/EEG signals (King et al. 2018; Stokes, Wolff, and Spaak 2015; King and Dehaene 2014). This intuition is driving the success of linear decoders for evoked response analysis but faces additional challenges when applied to power spectra (Sabbagh et al. 2020). Computing power features on M/EEG sensor-space signals renders the regression task a non-linear problem for which linear models will provide sub-optimal results (Sabbagh et al. 2019). In practice, this can be overcome by extracting nonlinear features like spectral power after anatomy-based source localization, or in a data-driven fashion that does not require availability of individual MRI scans. Spatial filtering techniques provide unmixing of brain sources based on statistical criteria without using explicit anatomical information, which has led to supervised spatial filtering pipelines (de Cheveigné and Parra 2014; Dähne et al. 2014). Another related strategy consists in computing features that are invariant to field spread. This can be achieved by Riemannian geometry, an approach first applied to M/EEG in the context of brain computer interfaces but that has also proven effective for biomarker learning (Barachant et al. 2012; Yger, Berar, and Lotte 2017; Rodrigues, Jutten, and Congedo 2019). These approaches have in common to favor the covariance of M/EEG sensors as a practical representation of the signals. Manipulating the covariance allows one to suppress the effects of linear mixing while, at the same time, exposing the power spectrum and the spatial structure of neuronal activity in each frequency band (Sabbagh et al. 2020). To scan along the entire power spectrum, one computes covariances from several narrow-band signals covering low to high frequencies

(Sabbagh et al. 2020). This provides spatially fine-grained information of frequency-specific neuronal activity, hence the term *filterbank*.

Here we implemented the filterbank models from (Sabbagh et al. 2020; Sabbagh et al. 2019) based on Riemannian geometry that were found to provide a practical alternative to MRI-based source localization, although falling slightly behind in terms of performance. This may be explained by the model violations arising from computing the Riemannian embedding across multiple participants. The Riemannian embedding assumes linear field spread but each recording comes from a different head and different sensor locations, which is explicitly modeled when computing individual-specific source estimates. It is an open question whether template-based source localization can improve upon the Riemannian pipeline, observing that in the case of MEG such a procedure would be informed by the head position in the MEG dewar. Both average brain templates and Riemannian embeddings mitigate field spread in a global way with the difference that the average template uses some anatomical information and approximate sensor locations in the context of MEG, whereas Riemannian embeddings are purely a data-driven procedure with some whitening based on the average covariance (across subjects).

To evaluate the benefit of a template-based anatomy, we included a filterbank model using source localization based on the *fsaverage* subject from FreeSurfer (Fischl 2012). The forward model was computed with a 3-layer Boundary Element Method (BEM) model. Source spaces were equipped with a set of 4098 candidate dipole locations per hemisphere. Source points closer than 5mm from the inner skull surface were excluded. The noise covariance matrices used along with forward solutions to compute minimum-norm estimates inverse operators were taken as data-independent diagonal matrices. Diagonal values defaulted to the M/EEG-specific expected scale of noise (obtained via the “make_ad_hoc_cov” function from MNE-Python). All computations were done with MNE (Gramfort et al. 2014, 2013). For computational efficiency, source power estimates were obtained by applying the inverse operators to the subjects' covariance data (MNE-Python function “apply_inverse_cov”). Dimensionality reduction was carried out with a parcellation containing 448 ROIs (Khan et al. 2018). This procedure closely followed the one from (Engemann et al. 2020), with the difference that here an MRI template was used instead of subject-specific MRIs. Finally, the 448 ROI-wise source power estimates represented as diagonal matrices were the inputs of the log-diag pipeline from (Sabbagh et al. 2020; D. Sabbagh et al. 2019). Features were computed using the *coffeine* package².

² <https://github.com/coffeine-labs/coffeine>

Deep learning approaches

This category concerns modeling strategies in which the outcome is mapped directly from the raw signals without employing separate a priori feature-defining procedures. Instead, multiple layers of nonlinear but parametric transformations are estimated end-to-end to successively summarize and compress the input data. This process is controlled by supervision and enabled by a coherent single optimization objective. In many fields, emerging deep learning methods keep defining the state of the art in generalization performance, often outperforming humans. Deep learning models are however greedy for data, and it may take hundreds of thousands if not millions of training examples until these models show a decisive advantage over classical machine-learning pipelines. Applied to neuroscience, where the bulk of datasets is small to medium-sized, deep learning models may or may not outperform classical approaches (Poldrack, Huckins, and Varoquaux 2020; Schulz et al. 2020; Roy et al. 2019; He et al. 2020). The success of using a deep-learning model may, eventually, depend on the amount of energy and resources invested in its development (Gemein et al. 2020).

Apart from high performance on standard laboratory M/EEG datasets and decoding tasks, deep learning models are attractive for other reasons. First, when very specific hypotheses about data generators or noise generators are available (Kietzmann, McClure, and Kriegeskorte 2019). In this setting, the model architecture can be designed to implement this knowledge, e.g. to explicitly extract band power features in a motor decoding task. Second, these models have a strategic advantage when the data generating mechanism is not known at all, hence, few hypotheses about classes of features are available (Schirrmester et al. 2017). In this setting, models with a generic architecture can learn and identify relevant features themselves without requiring expert knowledge of the researcher. With neural architecture search and automated hyperparameter optimization, there is also intense research to even reduce the amount of expert knowledge needed to create the network architecture itself. This flexibility has led neuroscientists to discover the framework as a vector for hypothesis-driven research probing brain functions and neural computation (Yamins and DiCarlo 2016; Bao et al. 2020). At the same time, this flexibility is equally beneficial under complex environmental conditions that degrade the quality of M/EEG recordings (e.g. real-world recordings outside of controlled laboratory conditions), in which the classes of relevant features are not a priori known and deep learning models can exploit the structure of the data and noise sources to provide robust predictions. (Banville et al. 2021).

Based on prior work, here we benchmarked two battle-tested general architectures (Gemein et al. 2020) implemented using the Braindecode package³ (Schirrmester et al. 2017; Gramfort et al. 2013). Braindecode is an open-source library for end-to-end learning on EEG

³ <https://braindecode.org>

signals. It is closely intertwined with other libraries. One of them is Mother of all BCI Benchmarks (MOABB) (Jayaram and Barachant 2018), which allows for convenient EEG-data fetching, MNE (Gramfort et al. 2013, 2014), implements well established data structures, preprocessing functionality, and more. A second key dependency is Skorch (Tietz et al. 2017), which implements the commonly known scikit-learn (Pedregosa et al. 2011) API for neural network training (Buitinck et al. 2013). For these reasons, Braindecode is equally useful for EEG researchers who desire to apply deep learning as well as for deep learning researchers who desire to work with EEG data. Braindecode builds on PyTorch (Paszke et al. 2019) and comprises a zoo of decoding models that were already successfully applied to a wide variety of EEG decoding classification and regression tasks, such as motor (imagery) decoding (Schirrmester et al. 2017; Kostas and Rudzicz 2020), pathology decoding (Gemein et al. 2020; van Leeuwen et al. 2019; Tibor Schirrmester et al. 2017), error decoding (Völker et al. 2018), sleep staging (Chambon et al. 2018; Perslev et al. 2021), and relative positioning (Banville et al. 2020).

For this benchmark and the task of age regression we used two Convolutional Neural Networks (ConvNets, sometimes abbreviated CNNs) (LeCun et al. 1999) namely ShallowFBCSPNet (BD-Shallow) and Deep4Net (BD-Deep) (Schirrmester et al. 2017). BD-Shallow was inspired by the famous filter bank common spatial pattern (FBCSP) (Ang et al. 2008) algorithm. Initially, it has two layers that represent a temporal convolution as well as a spatial filter. Together with a squaring and logarithmic non-linearity it was designed to specifically extract bandpower features. Of note, in the present context this architecture is closely related to SPoC (Dähne et al 2014) and, in therefore, in principle, has the capacity to deliver consistent regression models as was formally proven in previous work (Sabbagh et al 2020).

In contrast, BD-Deep is a much more generic architecture. In total, it has four blocks of convolution-max-pooling and is therefore not restricted to any specific features. While BD-Deep has around 276k trainable parameters and has therefore more learning capacity, BD-Shallow has only about 36k parameters.

It is important to note, that we did neither adjust the model architectures (apart from those changes required by the regression task) nor run task-specific hyperparameter optimization. Both ConvNets were used as implemented in Braindecode with hyperparameters that were already successfully applied to pathology decoding from the TUH Abnormal EEG Corpus (Gemein et al. 2020; van Leeuwen et al. 2019; Tibor Schirrmester et al. 2017). For more information on Braindecode or the ConvNets, please refer to the original publication (Schirrmester et al. 2017). For decoding, we converted the MEG input data from Tesla to Femtotesla, the EEG input data from Volts to Microvolts, and additionally rescaled the data,

282 such that it has roughly zero mean and unit variance by dividing by the standard deviation of
283 each dataset (see Section Datasets).

General data processing strategy using BIDS and the MNE-BIDS pipeline

284 Neuroimaging and behavioral data are stored in many different complex formats, potentially
285 hampering efforts of building widely usable methods, hence, impeding reproducible research.
286 Our goal was to provide brain-age prediction models that can be directly applicable to any
287 new electrophysiological dataset. For this purpose, we used the Brain Imaging Data Structure
288 (BIDS) (Gorgolewski et al. 2016) which allows us to organize neuroimaging data in a
289 standardized way supporting interoperability between programming languages and software
290 tools. We used the MNE-BIDS software (Appelhoff et al. 2019) for programmatically
291 converting M/EEG datasets into the BIDS format (Pernet et al. 2019; Niso et al. 2018). This
292 has allowed us to access all datasets included in this work in the same way, enabling data
293 analysis for all these datasets with the same code. We will now summarize the general
294 workflow (cf. Fig. 1).

295 For this study, we used the MNE-BIDS-Pipeline for automatic preprocessing of MEG
296 and EEG data stored in BIDS format⁴ (Jas et al. 2018). Its main advantage is that we can
297 implement various custom analyses for different datasets without having to write any
298 elaborate code. Modifying the overall processing pipeline or adapting a given pipeline to a
299 new dataset only requires few edits. Controlling the pipeline is achieved through dataset-
300 specific configuration files that specify the desired processing steps and options of the MNE-
301 BIDS-Pipeline while dealing with the peculiarities of the data. The MNE-BIDS-Pipeline scripts
302 themselves do not need to be modified and are readily applicable on diverse datasets.

303 We designed configuration files to implement data processing steps common to all
304 datasets analyzed in this benchmark while handling dataset-specific details. Raw signals
305 bandpass-filtered between 0.1 and 49Hz using a zero-phase finite impulse response (FIR)
306 filter with Hamming window. Window length and transition bandwidth were automatically
307 controlled by default settings of MNE-Python (v0.24). We considered epochs of 10-second
308 length without overlap. These epochs coincided with eyes-closed or eyes-open resting-state
309 conditions in some of the datasets. As additional channels measuring ocular and cardiac
310 activity were not consistently available across datasets, we only implemented amplitude-
311 based artifact rejection using the local autoreject method (Jas et al. 2017). Through 5-fold
312 cross-validation, autoreject chose channel-specific rejection peak-to-peak-amplitude
313 thresholds and then decided if a given epoch could be repaired using interpolation, or if it
314 should be rejected to obtain clean data. We kept the default grid of candidate values for the

⁴ <https://github.com/mne-tools/mne-bids-pipeline>

hyperparameters ‘rho’ (the consensus proportion of bad channels leading to rejection of an epoch) and ‘kappa’ (maximum number of channels allowed to be interpolated). For ‘rho’ we considered a linearly spaced grid of 11 points between 0 and 1. For ‘kappa’ we considered 1, 4, or 32 channels. As the local autoreject is not yet supported in the MNE-BIDS pipeline, this step was implemented in a custom script (see the “compute_autoreject.py” in the code repository). Apart from preprocessing, we also made use of the MNE-BIDS-Pipeline to generate forward solutions and inverse operators for the source localization approach based on template MRI (see section *Covariance-based filterbank approaches* for detailed explanations).

Each model of the benchmark is based on features extracted from clean epochs. Again, the conversion of datasets to BIDS has enabled feature extraction using one general script for all datasets (“compute_features.py” in the code repository).

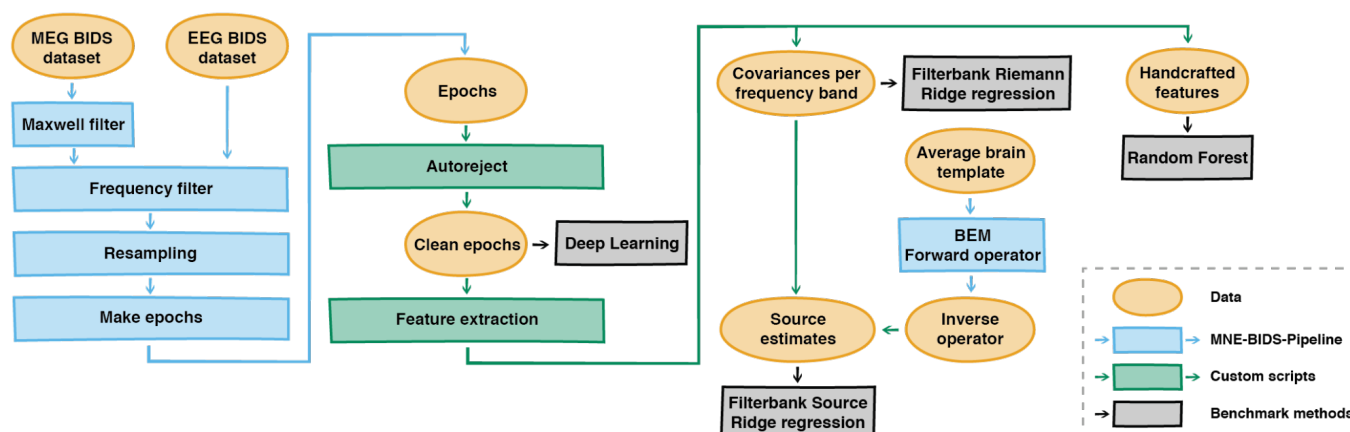


Figure 1: Data processing, feature extraction and model construction based on the BIDS standard. This benchmark project provides a common data processing and feature extraction code allowing comparisons of different classical and deep learning-based machine learning models across different M/EEG datasets. Support for new datasets can be added with minimal modifications. For a detailed description consider the main text and the open-source code repository supporting this article⁵.

Datasets

Large datasets and biobanks are the backbone of population modeling. In the past 10 years, this has led to a wealth of publications in cognitive neuroscience on modeling biomedical outcomes and individual differences in cognition from MRI data (Kernbach et al. 2018; James H. Cole 2020; Smith et al. 2015). This has been enabled by consortia and large-scale institutional collaborations (Bycroft et al. 2018; Van Essen et al. 2013) that aim at recontextualizing existing data for open-ended future usage (Leonelli 2016). More recently, the first M/EEG datasets have emerged with a focus on characterizing populations (Taylor et al. 2017; Larson-Prior et al. 2013; Babayan et al. 2019; Obeid and Picone 2016; Niso et al.

⁵ <https://github.com/meeg-ml-benchmarks/meeg-brain-age-benchmark-paper>

2016; Valdes-Sosa et al. 2021; Bosch-Bayard et al. 2020). The selection of datasets for the present study did not aim at comprehensiveness but represents an attempt to secure a minimum degree of diversity. Social bias and fairness are important challenges, not only in the field of machine learning but also in biomedical research. It has been shown for modern biobanks that the sample deviates from the general population in important ways, oversampling Caucasian people with higher education degrees (Fry et al. 2017; Henrich and Heine 2010). For deployment of predictive biomarkers, this can have tragic consequences as clinical utility may depend on sex and ethnicity (Duncan et al. 2019). As a result, in EEG research, specific risks of racial bias have been recognized lately, highlighting the risk of selection bias and confounding, e.g., due to culture-specific hair style (Choy, Baker, and Stavropoulos 2021). Taken together, this emphasizes the importance of benchmarking on socially and culturally different datasets. Our selection includes M/EEG datasets from four different countries representing culturally and socioeconomically diverse contexts. In the following we will provide a high-level introduction to the datasets, highlighting characteristic differences, challenges and opportunities for unique benchmarks.

Cam-CAN MEG data.

The Cambridge Centre of Ageing and Neuroscience (Cam-CAN) dataset (Taylor et al. 2017; Shafto et al. 2014) has been the starting point of our efforts in building brain age models (Engemann et al. 2020; David Sabbagh et al. 2020) and we like to see it as a discovery context. The combination of a wide, almost uniformly distributed age range and MEG data alongside MRI and fine-grained neurobehavioral results make it a rich resource for exploring aging-related cortical dynamics. On the other hand, models developed on this dataset may not be generalizable to real-world contexts in which EEG is operated. The following two sections are based on the methods description from our previous publications (Engemann et al. 2020; Sabbagh et al. 2020).

Sample description. The present work was based on the latest BIDS release of the Cam-CAN dataset (downloaded February 2021). We included resting-state MEG recordings from 646 participants (female = 319, male = 327). The age of the participants ranged from 18.5 to 88.9 years with a mean age of 54.9 (female = 54.5, male = 55.4) and a standard deviation of 18.4 years. Data is provided in Tesla and has a standard deviation of 369.3 Femtotesla. We did not apply any data exclusion. Final numbers of samples reflect successful preprocessing and feature extraction. For technical details regarding the MEG instrumentation and data acquisition, please consider the reference publications by the Cam-CAN (Taylor et al. 2017; Shafto et al. 2014). In the following we highlight a few points essential for understanding our benchmarks on the Cam-CAN MEG data.

Data acquisition and processing. MEG was recorded with a 306 VectorView system (Elekta Neuromag, Helsinki). This system allowed measuring magnetic fields with 102 magnetometers and 204 orthogonal planar gradiometers inside a light magnetically shielded room. During acquisition, an online filter was applied between around 0.03Hz and 1000Hz. After bandpass filtering (0.1 - 49Hz), we applied decimation by a factor of 5, leading to a sample frequency of 200Hz (at the epoching stage). To mitigate the contamination of the MEG signal by environmental magnetic interference, we applied the temporal signal-space-separation (tSSS) method (Taulu, Simola, and Kajola 2005). Default settings were applied for the harmonic decomposition (8 components of the internal sources, 3 for the external sources) on a 10-s sliding window. To discard segments for which inner and outer signal components were poorly distinguishable, we applied a correlation threshold of 98%. As a result of this procedure, the signal was high pass filtered at 0.1Hz and the dimensionality of the data was reduced to 65, approximately. It is worthwhile to note that Maxwell filtering methods like tSSS merge the signal from magnetometers and gradiometers into one common low-rank representation. As a result, after tSSS, the signal displayed on magnetometers becomes a linear transformation of the signals displayed on the gradiometers. This leads to virtually identical results when conducting analyses exclusively on magnetometers versus gradiometers (Garcés et al. 2017). To reduce computation time, we analyzed the magnetometers for our benchmark. To deal with the reduced data rank, a PCA projection to the common rank of 65 was applied whenever the machine learning pipeline was sensitive to the rank (e.g., Riemannian filterbank models). For the full specification of the preprocessing, please refer to the “config_camcan_meg.py” file in the code repository.

LEMON EEG data.

The Leipzig Mind-Brain-Body (LEMON) dataset offers rich multimodal EEG, MRI and fMRI data for a well characterized group of young and elderly adults sampled from the general population (Babayan et al. 2019). As it was the case for the Cam-CAN data, here the research was conducted in a research context using high-end equipment accompanied by rich and fine-grained neurocognitive and behavioral assessments.

Sample description. EEG resting-state data from 227 healthy individuals from the LEMON dataset were included in this study. This sample contains 82 females (mean age = 44.2) and 145 males (mean age = 36), representing a clearly visible difference in the composition of the sample (Fig. 2). Their age distribution went from 20 to 77 years old with an average of 38.9 +/- 20.3 years. Our sample covers the whole available dataset (downloaded September 2021) as we did not apply any exclusion criteria. It is a peculiarity of this dataset is that it is divided into 2 distinct age subpopulations, one between 20-35, the second between 55-77 (Fig. 2), rendering the mean a bad representation of the age distribution. Moreover, the

public version of the datasets only provides ages in a granularity of 5 years to mitigate the risk of identifying participants. For the purpose of this study, we included the precise ages obtained through institutional collaboration. The impact on average modeling results turned out negligible, however. Data is provided in Volts and has a standard deviation of 9.1 Microvolts.

Data acquisition and processing. EEG was recorded with 62-channel active ActiCAP electrodes and a bandpass filter between 0.015Hz and 1kHz. We applied additional bandpass filtering between 0.1Hz and 49Hz. The channel placement implemented the 10-5 system (Oostenveld and Praamstra 2001). EEG data were sampled at 2500Hz. After bandpass filtering (0.1 - 49Hz), data were decimated by a factor of 5, yielding a final sampling frequency of 500Hz. As a peculiarity of the dataset, resting-state recordings encompass samples from two conditions: eyes-closed and eyes-open. Our pipeline explicitly respected these different conditions. To include a maximum of data and, potentially, a larger set of distinguishable EEG sources, we pooled the data prior to feature extraction. For the full specification of the preprocessing, please refer to the “config_lemon_eeg.py” file in the code repository.

CHBP EEG data.

The Cuban Human Brain Mapping Project (CHBP) provides rich multimodal EEG and MRI data sampled from young to middle-aged adults from the general population (Valdes-Sosa et al. 2021; Hernandez-Gonzalez et al. 2011; Bosch-Bayard et al. 2020). As for the Cam-CAN and LEMON data, research was carried out using high-end electrophysiological equipment in a biomedical research context. However, the data was collected in a Latin American mid-income country, (Valdes-Sosa et al. 2021), adding a much-needed opportunity for increasing the diversity in population-level neuroscience datasets. This diversity expresses itself in the composition of EEG protocols which contain elements of real-world neurology exams, e.g., a hyperventilation task.

Sample description. EEG resting-state data from 282 healthy individuals from the CHBP dataset were included in this study. The sample contained 87 females (mean age = 36.7) and 195 males (mean age = 29.9), representing a clearly visible difference in the composition of the sample (*Fig. 2*). The overall age distribution went from 18 to 68 years with an average of 32 +/- 9.3 years. Data is provided in Volts and has a standard deviation of 6.6 Microvolts. Our sample covers the whole available dataset (download June 2021) as we did not apply any exclusion criteria. Final numbers reflect successful processing of the data.

Data acquisition and processing. EEG data were recorded using a MEDICID 5 system and two different electrode caps of either 64 or 128 channels. The channel placement implemented the 10-5 system (Oostenveld and Praamstra 2001). Here we focused the analysis on the subset of common channels present in all recordings, leading to 53 channels. We applied additional bandpass filtering between 0.1Hz and 49Hz. As in the LEMON dataset,

resting-state recordings encompassed samples from eyes-closed and eyes-open conditions. Again, we pooled both conditions prior to feature extraction. Note that for the data release (downloaded July 2021) used in this work, we could not benefit from the expert-based annotations of clean data. The results obtained on this dataset may therefore be impacted by quality issues to unknown extents.

For the full specification of the preprocessing, please refer to the “config_chbp_eeg.py” file in the code repository.

TUAB EEG data.

The Temple University Hospital Abnormal EEG Corpus (TUAB) provides socially and ethnically heterogeneous clinical EEG data (Obeid and Picone 2016) mostly from Latin-American and African American participants (personal communication, Joseph Picone). As a peculiarity, the EEG data is obtained from an archival effort of recovering different EEG exams from the Temple University Hospital in Philadelphia. The clinical and social diversity render the TUAB dataset an important resource for electrophysiological population modeling (Gemein et al. 2020; David Sabbagh et al. 2020).

Sample description. Here, we focused exclusively on the EEG recordings labeled as not pathological by medical experts comprising a subsample of 1385 subjects (female = 775 and males = 610). This sample contained individuals ranging from newborn children (min age = 0 for female and min age = 1 for male) to elderly (max age = 95 for female and 90 for male) people (Fig. 2). The average age is 44.4 +/- 16.5 years. Data is provided in Volts and has a standard deviation of 9.7 Microvolts. The data processing closely followed our previous work on the TUAB data (Sabbagh et al. 2020). For further details about the dataset, please refer to the reference publications (Harati et al. 2014; Obeid and Picone 2016).

Data acquisition and processing. EEG data were recorded using different Nicolet EEG devices (Natus Medical Inc.), equipped with between 24 and 36 channels. For channel placement, the 10-5 system was applied (Oostenveld and Praamstra 2001). All sessions have been recorded with an average reference. Here we considered a subset of 21 common channels. As channel numbers differed across recordings, re-referencing was necessary. For consistency, we also applied re-referencing with an average reference on all other EEG datasets. As sampling frequencies were inconsistent across recordings, we resampled the data to 200Hz. For many patients, multiple recordings were available. For simplicity we only considered the first recording. For the full specification of the preprocessing, please refer to the “config_tuab_eeg.py” file in the code repository.

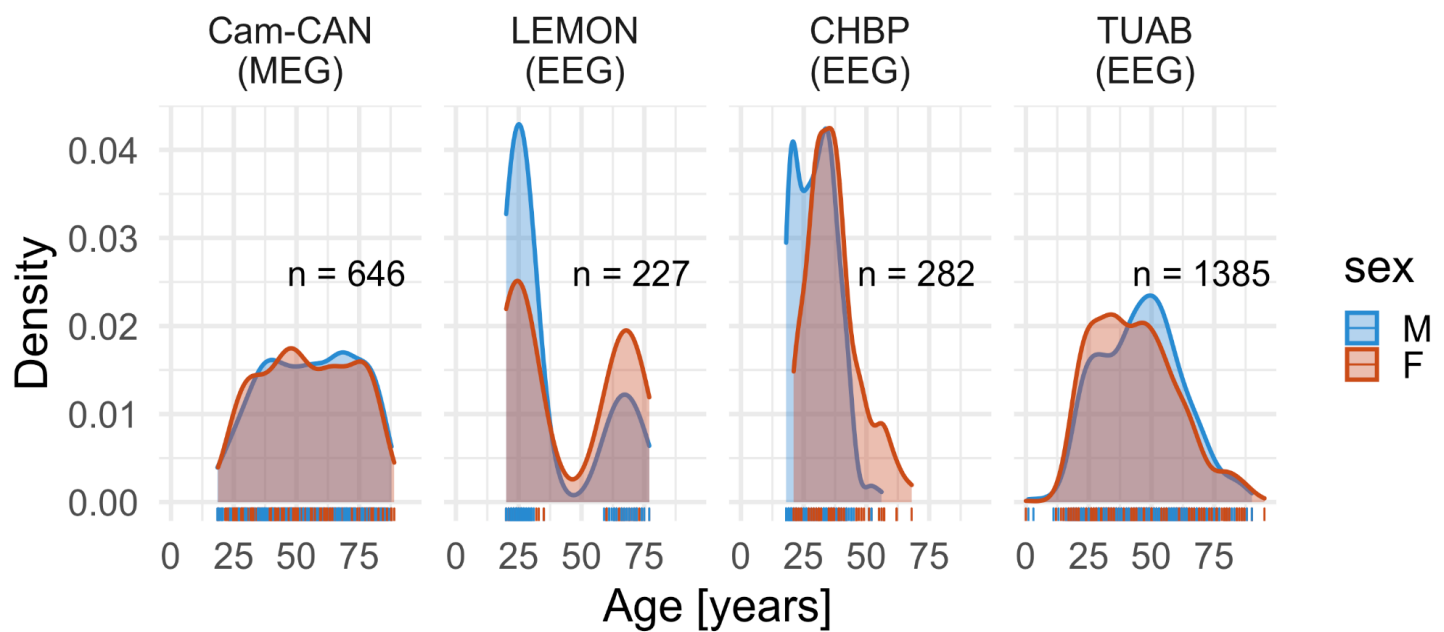


Figure 2: Age distributions by gender by dataset. The kernel density (y axis) is plotted across the age range (x axis) for all four M/EEG datasets included in the study, separately for male (blue) and female (red) participants. Individual observations are displayed by rug plots at the bottom of each panel. The Cam-CAN data (MEG) show a wide age range with a quasi-uniform distribution and no obvious sex imbalance. This situation poses no a priori challenges for age prediction while, at the same time, analysis of MEG data may be more complex. The LEMON dataset included a group of young participants and a group of old participants, leading to a characteristic bi-modal distribution. Sex imbalance is clearly visible with more male participants in the group of young participants and fewer male participants in the group of older participants. This may lead to potential sex differences in prediction success and renders the average age a bad summary of the age distribution. The CHBP data shows a rather reduced age range with a right-skewed age distribution and some sex imbalance (again more young male participants). Predicting the age can be expected to turn out more difficult on this dataset for the implied lack of density along the age range. Finally, the TUAB data present a symmetric age distribution with minor sex differences, however, a less uniform age distribution. This may lead to more pronounced errors in young and elderly participants. This may, however, be compensated for by the more generous sample size. To summarize, the four datasets investigated here pose unique challenges for M/EEG brain age modeling.

Model evaluation and comparison

471 To gauge model performance, we first defined a baseline model that should not provide any
 472 intelligent prediction. As in previous work (Sabbagh et al. 2020; Sabbagh et al. 2019;
 473 Engemann et al. 2020), we employed a dummy regressor model as a low-level baseline in
 474 which the outcome is guessed from the average of the outcome on the training data. This

approach is fast and typically converges with more computationally demanding procedures based on permutation testing that we shall briefly outline.

This is particularly relevant for the present benchmark where the combinatorial matrix of machine learning models (including deep learning) versus datasets would lead to unpleasant computation times when applying tens of thousands of permutations. The same can be said for other approximations focusing on ranking statistics across hundreds of Monte Carlo cross-validation iterations (Sabbagh et al. 2019). Finally, another approach relies on large left-out datasets, entirely independent from model construction, in which predictions can be treated like random variables, hence, classical inferential statistics are valid. In previous work (Dadi et al. 2021), permutation tests and the non-parametric bootstrap were employed on more than 4000 left-out data points to assess performance above chance and pairwise differences between models. Such generous held-out datasets are not available in the present setting, nor can we readily compute statistics across folds, as cross-validation iterations are not statistically independent. We therefore implemented a less formal approach comparing competing models against dummy regressors and against each other based on standard 10-fold cross-validation based on fixed random seeds. This ensured that for any model under consideration, identical data splits were used. Of note, our reusable benchmark code allows interested readers to implement more exhaustive model comparison strategies.

For scoring prediction performance, we focused on two complementary metrics. The coefficient of determination (R^2) score and the mean absolute error (MAE). Considering the dummy regressor, the R^2 score is a natural choice as it quantifies the incremental success of a model over a regressor returning the average of the training-data as a guess for the outcome. Compared to Pearson correlations that are sometimes used in applied neuroscience studies, the R^2 metric is more rigorous as it is sensitive to the scale of the error and the location: Predictions that are entirely biased, e.g, shifted by a large offset, could still be correlated with the outcome. In contrast, the R^2 metric clearly penalizes systematically wrong predictions by assigning scores smaller than 0. Positive predictive success thus falls into a range of R^2 between 0 and 1. This facilitates comparisons across models within the same dataset while posing challenges when comparing models across datasets.

We therefore considered the MAE which has the benefit of expressing prediction errors at the scale of the outcome. This is particularly convenient for scientific interpretation when the outcome has some practical meaning as is the case in the present benchmarks on age prediction. Importantly, the MAE does not per se resolve the problem of comparisons across datasets as the meaning of errors entirely depend on the distribution of the outcome: Small errors in years are good for datasets with wide age distributions but bad in datasets with narrow age distributions. This obviously calls for contextualizing the MAE against a dummy baseline regression model. While this does not necessarily facilitate comparisons across

512 datasets, it helps make visible situations in which one cannot rely solely on the R^2 for model
513 comparisons.

Computational considerations and software

514 *M/EEG data processing.* BIDS conversion and subsequent data analysis steps were carried
515 out in Python 3.7.1, the MNE-Python software (v0.24, Gramfort et al. 2014, 2013), the MNE-
516 BIDS package (v0.9, Appelhoff et al. 2019) and the MNE-BIDS-pipeline on a 48-core Linux
517 high-performance server with 504 GB RAM. The joblib library (v1.0.1) was used for parallel
518 processing. For artifact removal, the latest development version (v0.3dev) of the autoreject
519 package (Jas et al. 2017) was used.

520 *Classical machine learning benchmarks.* For future computation, the mne-features
521 (0.2, Schiratti, Le Douget, Le Van Quyen, et al. 2018), PyRiemann (v0.2.6) and the coffeine
522 (0.1, Sabbagh et al. 2020) libraries were used. Analyses were composed in custom scripts
523 and library functions based on the Scientific Python Stack with NumPy (v1.19.5, Harris et al.
524 2020), SciPy (v1.6.3, Virtanen et al. 2020) and pandas (v.1.2.4, McKinney and Others 2011).
525 Machine-learning specific computation was composed using the scikit-learn package
526 (Pedregosa et al. 2011). Analysis was carried out on a 48-core Linux high-performance server
527 with 504 GB RAM. Feature extraction, depending on the dataset, completed within several
528 hours to days. Model training and evaluation completed within a few minutes to hours.
529 However, feature computation could last several days, depending on the dataset and the
530 types of features.

531 *Deep learning benchmarks.* A high-performance Linux server with 72 cores, 376 GB
532 RAM and 1 or 2 Nvidia Tesla V100 or P4 GPUs was used. Code was implemented using the
533 PyTorch (Paszke et al. 2019) and braindecode (Schirrmester et al. 2017) packages. Model
534 training and evaluation completed within 2-3 days.

535 *Data visualization.* Graphical displays and tables were composed on an Apple Silicon
536 M1 Macbook Pro (space gray) in R (v4.0.3 “Bunny-Wunnies Freak Out”) using the ggplot2
537 (v3.3.5, Wickham 2011), patchwork (v1.1.1, Pedersen 2019), ggthemes (v4.2.4) and scales
538 (v1.1.1, Arnold 2017) packages with their respective dependencies.

Results

539 For the age prediction benchmark, we considered five alternative approaches: heterogeneous
540 handcrafted features & random forest (‘handcrafted’), filterbank features based on
541 Riemannian embeddings & ridge regression (‘filterbank-riemann’), filterbank features based

on source localization with MRI-average template & ridge regression ('filterbank-source'), a shallow deep learning architecture ("shallow") and a 4-layer deep-learning architecture ('deep'). These approaches were benchmarked across four M/EEG datasets: The Cambridge Centre of Ageing and Neuroscience (Cam-CAN) dataset (Taylor et al. 2017), the Cuban Human Brain Mapping Project (CHBP) dataset (Valdes-Sosa et al. 2021), the Leipzig Mind-Brain-Body (LEMON) dataset (Babayan et al. 2019) and the Temple University Hospital Abnormal EEG Corpus (TUAB) dataset (Obeid and Picone 2016). Generalization performance was estimated using 10-fold cross validation after shuffling the samples (fixed random seed). The coefficient of determination (R^2) was used as a metric enabling comparisons between datasets independently of the age distribution, mathematically quantifying the additional variance explained by predicting better than the average age. A dummy model empirically quantifies chance-level prediction by returning the average age of the training data as prediction. The results are displayed in Fig. 3. One can see that on most of the datasets all machine learning models achieved R^2 scores well beyond the dummy baseline. The highest scores were observed on the Cam-CAN MEG dataset, followed by the LEMON EEG dataset. Caution is warranted though to avoid premature conclusions: The R^2 offers a common scale that explicitly compares the incremental model performance over the average predictor. This is achieved by dividing the sum of squares of the model's prediction by the sum of squares of the average predictor but, in turn, depends on the distribution of age. As a result, this can be misleading in cross-dataset comparisons when the variance of the outcome is not the same, which is the case here (cf. Fig. 2). We therefore also computed results using the mean absolute error as a performance metric (Fig 4). One can now see that the overall distribution of scores, including the scores of the dummy model, depend not only on the dataset but also on its age range. Where the range is small, improvements over the baseline models are harder to observe. Moreover, comparing MAE scores across datasets without taking into account the baseline can yield misleading conclusions. For example, the same score of e.g. an MAE = 10 can be way above chance in one dataset (Cam-CAN) but below chance in another dataset (CHBP). To alleviate this problem, normalized MAE scores have been suggested in which the MAE scores are related to the range of the age distribution (Cole, Franke, and Cherbuin 2019). This does not come without its own problems, as then outliers in non-uniform distributions could drive the scores. As research keeps evolving on this topic and the community has not yet agreed on the best metric, we recommend considering multiple classical machine learning metrics when comparing model performance – in critical awareness of their respective limitations.

Confronting the relative performances of models to the dummy baseline in Fig. 3 and Fig. 4, one can see overall similar performance rankings between the models, regardless of the metric. See Table 1 for side-by-side comparisons of the aggregated cross-validation

distributions. The big-picture results argue in favor of the importance of fine-grained spatial features for M/EEG prediction while considering important between-dataset heterogeneity. Both filterbank pipelines provide features based on spatially aware representations of the M/EEG signals, which either explicitly or implicitly deal with the spatial spread of electrical potentials and fields characteristic for M/EEG signals. The source-level filterbank approximates source localization using the average MRI template, whereas Riemannian embeddings provide non-linear spectral features that are affine invariant, hence, independent of linear mixing. The deep benchmarks, on the other hand, implied spatial-filtering layers capable of mimicking source localization by learning an unmixing function. Surprisingly, using the average MRI template instead of the Riemannian embedding to construct a filterbank model did not lead to consistent improvements across datasets, suggesting that both approaches may be equally effective in practice. We would have conjectured that even an imprecise biophysical head model would provide inverse solutions leading to more accurate unmixing of M/EEG sources. Compared to our previous benchmarks (Engemann et al. 2020; Sabbagh et al. 2020) favoring filterbank models based on source-localization, one has to point out that this finding may reflect at least two differences: The use of an MRI template instead of individual co-registration and the use of empty-room-based suppression of environmental noise. The second factor may be less relevant for EEG though where empty room recordings are not available and data-based covariances are more common in event-related studies where brain activity induced by stimuli is compared against the background resting-state activity. As a practical implication, and if inspection of the brain sources is not a priority, the purely data-driven pipelines may be more practical as no additional MRI-based data processing is needed (cf. Fig. 1).

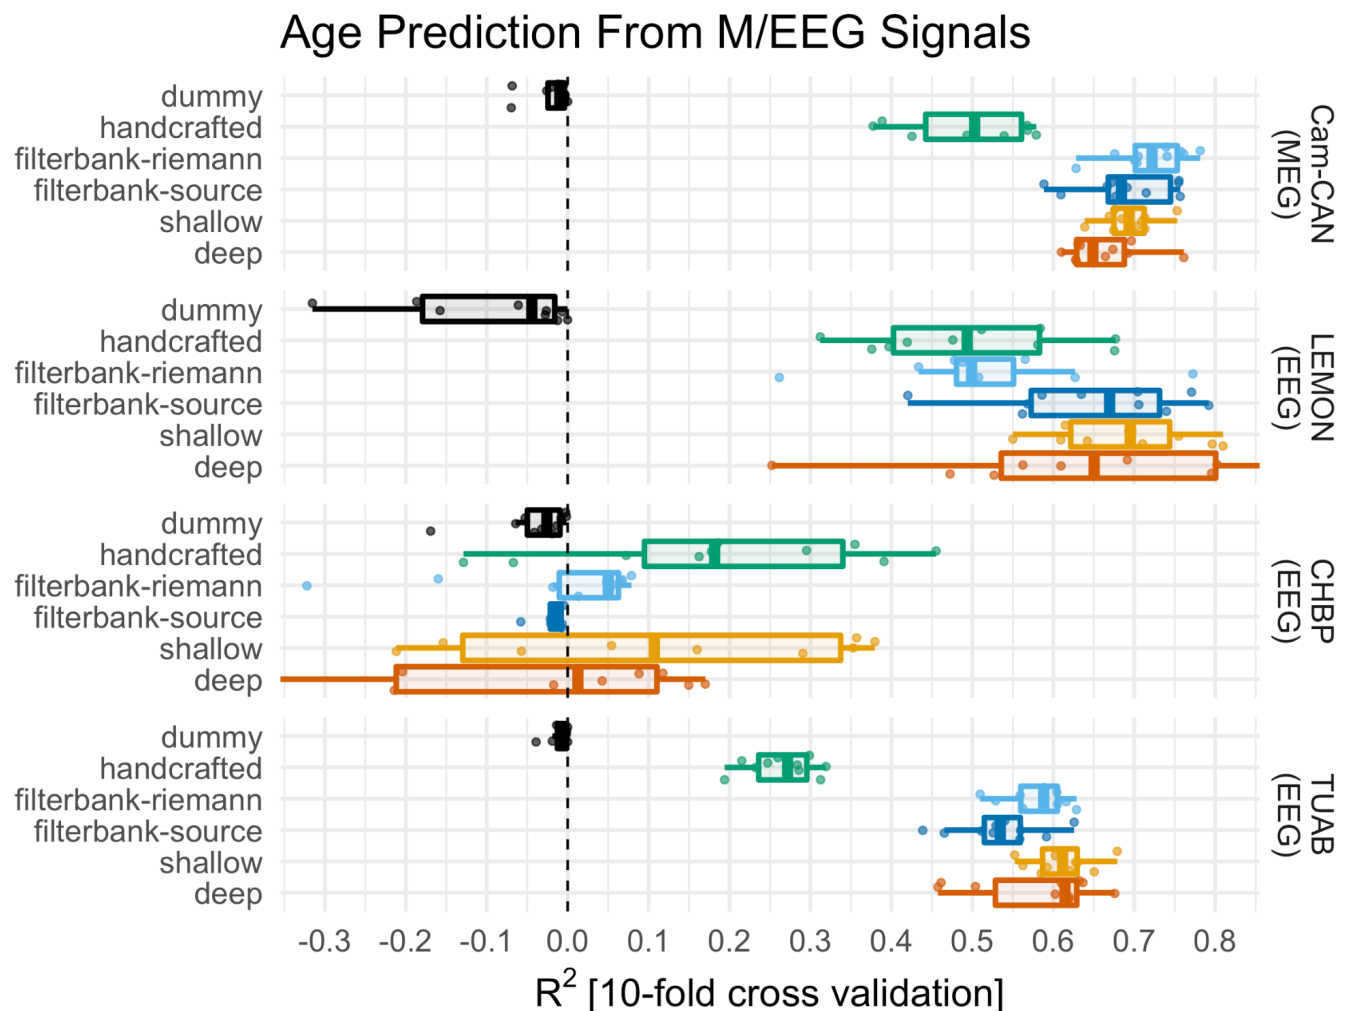


Fig. 3. Age prediction benchmarks across M/EEG datasets (R^2 score). Generalization performance was assessed by 10-fold cross-validation and the R^2 score for five machine learning strategies compared against a dummy model (rows) and four datasets (panels). Across datasets, dummy models were mostly well-calibrated with R^2 scores close to zero. The LEMON dataset was one exception as dummy scores were systematically worse than chance, which can be explained by the bimodal age distribution (cf. Fig. 2), rendering the average age a bad guess for the age. The 'handcrafted' benchmark delivered moderate but systematic prediction success across all datasets. The two filterbank models performed well across datasets with similar performances, markedly higher than for the 'handcrafted' approach. The only exception was the CHBP benchmark for which neither the filterbank nor the deep models delivered useful predictions. Note that here, for the 'filterbank-source', a single fold with an abysmal R^2 score of -0.15 was obtained (x limits constrained to a range between -0.3 and 1.0). Overall, the deep learning benchmarks performed similarly to the filterbank models.

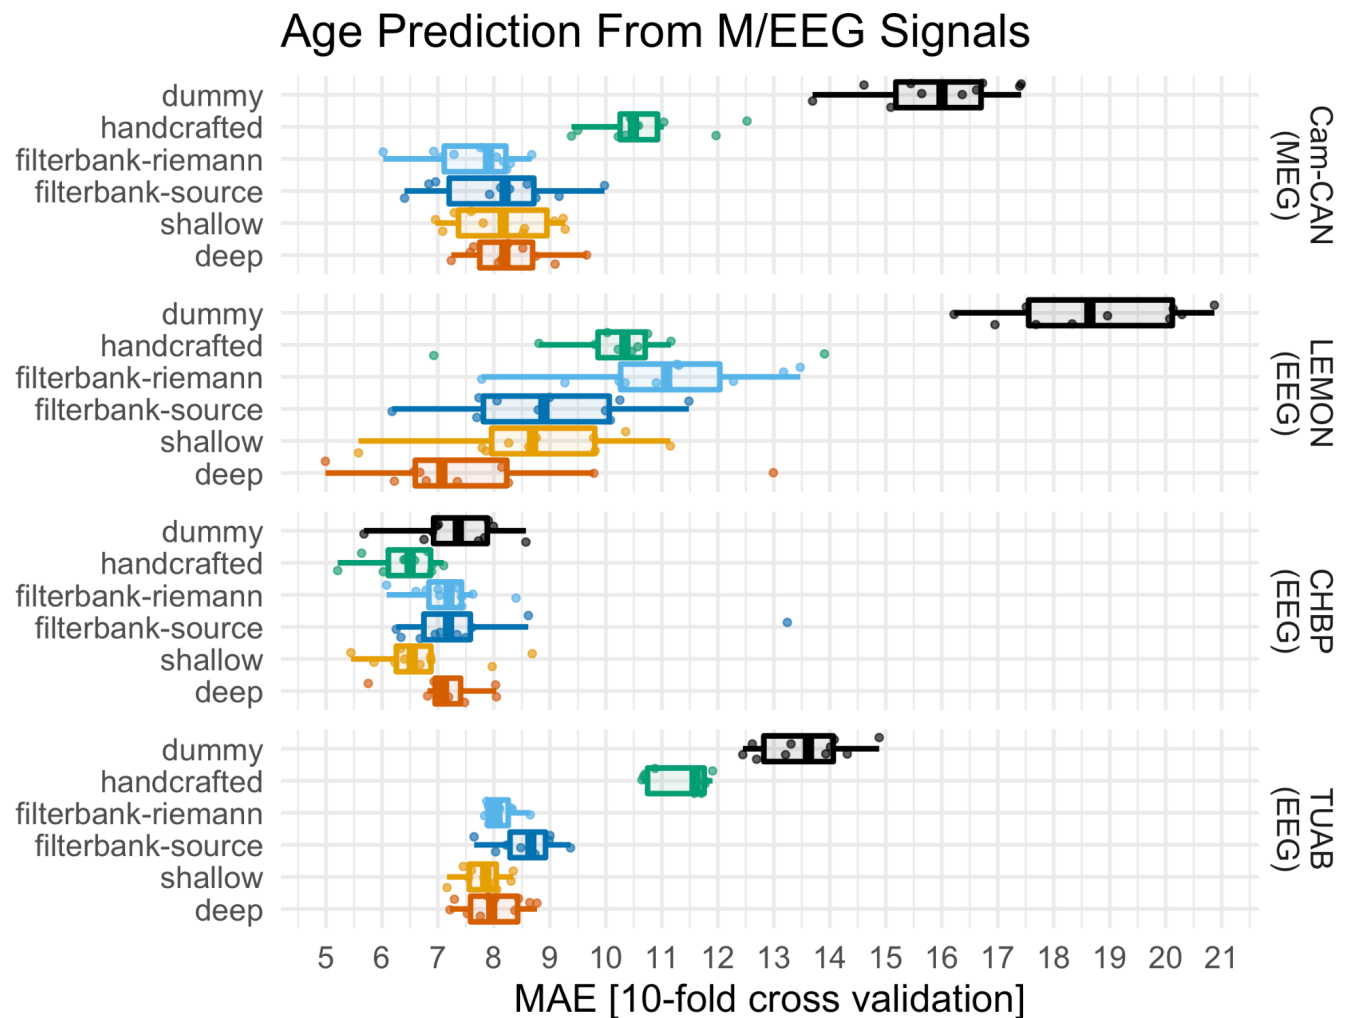


Fig. 4. Age prediction benchmarks across M/EEG datasets (mean absolute error). Same visual conventions as in Fig. 3. As the mean absolute error (MAE) is sensitive to the scale and distribution of the outcome, one can see characteristic differences across datasets. The distribution of the dummy scores provides an estimate of the random guessing. As before, in all but the Cuban datasets all benchmarks achieved MAE scores markedly better than the dummy with no overlap between model and dummy distributions. Model rankings resemble the ones obtained using the R^2 . On the LEMON data, the deep benchmark now presented a slight advantage over all other benchmarks.

602 Interestingly, none of these approaches involving spatially fine-grained
 603 representations of the M/EEG signal worked well on the CHBP data, whereas the random
 604 forest on top of hand-crafted features scored systematically better than the dummy baseline.
 605 This may be related to three factors that come together in the CHBP benchmark dataset: Like
 606 the LEMON dataset, the sample size is relatively small. Second, the age distribution is far less
 607 uniform, leading to underrepresentation of elderly participants. This makes the learning task

at hand harder as models have fewer training examples from elderly populations. These challenges apply equally to all machine learning benchmarks, hence, do not explain why the random forest model on hand-crafted features is working to some extent. In this context, it may be worthwhile to consider that the CHBP uses two different EEG montages, one with 60, one with 120 electrodes, which may induce strong difference in the covariance structure of the signals due to montage-specific noise structure related to the number of electrodes. This may have affected the random-forest pipeline less strongly as the hand-crafted features extracted marginal channel-wise summary statistics of the time-series or the power spectrum rather than pairwise interactions. Progress on this specific benchmark may therefore involve explicit consideration of the montage when selecting samples for cross-validation or even at the level of the machine learning model (e.g., by including the number of electrodes or montage type as covariate). Moreover, future availability of samples from older populations in the CHBP dataset will help disambiguate this point. Finally, once the expert-based quality-control annotations are considered for epochs-selection, the results obtained in this benchmark may change (see section Datasets/CHBP EEG data for details).

A different type of challenge is illustrated by the benchmarks on the LEMON dataset. As the age distribution is bimodal here (Fig. 2), the R^2 score is not well calibrated as the average predictor will not provide a reasonable summary of the distribution. This is not automatically mitigated by considering the MAE as a metric. On the other hand, it will not affect the ranking of the machine learning models, which compare overall well to results obtained on the Cam-CAN and the TUAB datasets. To obtain a more rigorous baseline, one could envision a group-wise average predictor that, depending on the age group, would return the groups' respective average age from the training data. We did not implement such a custom baseline here as it was our goal to stick to standard routines provided by the software libraries our benchmarks were based on. Second, it was our intention to expose such issues as this may stimulate future research and development.

Table 1. Aggregate cross-validation results across benchmarks and datasets

dataset	benchmark	$R^2_{(M)}$	$R^2_{(SD)}$	$MAE_{(M)}$	$MAE_{(SD)}$
Cam-CAN (MEG)	deep	0.66	0.05	8.29	0.74
Cam-CAN (MEG)	shallow	0.69	0.03	8.14	0.90
Cam-CAN (MEG)	filterbank-source	0.69	0.06	8.10	1.11
Cam-CAN (MEG)	filterbank-riemann	0.72	0.05	7.65	0.81
Cam-CAN (MEG)	handcrafted	0.49	0.07	10.65	0.98
Cam-CAN (MEG)	dummy	-0.02	0.03	15.90	1.22
LEMON (EEG)	deep	0.65	0.20	7.78	2.25
LEMON (EEG)	shallow	0.69	0.08	8.80	1.58
LEMON (EEG)	filterbank-source	0.65	0.12	8.93	1.56

LEMON (EEG)	filterbank-riemann	0.51	0.13	11.00	1.73
LEMON (EEG)	handcrafted	0.50	0.13	10.26	1.76
LEMON (EEG)	dummy	-0.13	0.17	18.70	1.60
CHBP (EEG)	deep	-0.10	0.28	7.14	0.65
CHBP (EEG)	shallow	0.03	0.38	6.74	0.96
CHBP (EEG)	filterbank-source	-1.49	4.67	7.76	2.05
CHBP (EEG)	filterbank-riemann	-0.01	0.13	7.17	0.63
CHBP (EEG)	handcrafted	0.19	0.19	6.40	0.61
CHBP (EEG)	dummy	-0.04	0.05	7.33	0.83
TUAB (EEG)	deep	0.58	0.08	7.99	0.55
TUAB (EEG)	shallow	0.61	0.04	7.82	0.38
TUAB (EEG)	filterbank-source	0.53	0.06	8.58	0.51
TUAB (EEG)	filterbank-riemann	0.58	0.04	8.10	0.26
TUAB (EEG)	handcrafted	0.26	0.04	11.32	0.53
TUAB (EEG)	dummy	-0.01	0.01	13.55	0.82

Discussion

634 In this study, we proposed empirical benchmarks for age prediction comparing distinct
635 machine learning approaches across diverse M/EEG datasets comprising, in total, more than
636 2500 recordings. The benchmarks were implemented in Python based on the MNE-software
637 ecosystem, the Braindecode package and the BIDS data standard. The explicit reliance on
638 the BIDS standard renders these pipelines applicable to any M/EEG data presented in the
639 BIDS format. This enabled coherent side-by-side comparisons of classical machine learning
640 models and deep learning methods across M/EEG datasets recorded in different research or
641 medical contexts.

642 Our cross-dataset and cross-model benchmarks pointed out stable ranking of model
643 performance across two metrics, the R^2 score and mean absolute error (MAE). R^2 scores
644 have been less consistently reported in the literature, however, the top MAE scores observed
645 across datasets in this benchmark of 7 to 8 years are well in line with reports from previous
646 publications (Sun et al. 2019; Sabbagh et al. 2020; Xifra-Porxas et al. 2021). While direct
647 comparisons against MRI were not performed in this study, the present benchmarks would be
648 compatible with the impression that for what concerns the overall performance of age
649 prediction, M/EEG features are slightly weaker than MRI features (Engemann et al. 2020;
650 Xifra-Porxas et al. 2021). We found that, overall, Riemannian filterbank models and deep
651 learning models achieved the highest scores, whereas random forests based on hand-crafted
652 features delivered robust performance. In line with previous work (Gemein et al. 2020), these
653 results suggest that deep learning methods do not necessarily show a consistent advantage
654 over classical pipeline models: Similar performance may be explained by the fact that our

filterbank models and the deep models imply similar spatially aware representations of the M/EEG data (see results section for detailed discussion in context). Moreover, given the relatively small training datasets, it can be considered good news that these parameter-rich models did not seem to overfit as was evidenced by comparisons against simpler classical models. Yet, it may be simply a matter of collecting larger samples until deep learning approaches may reveal their advantage at extracting more elaborate representations of M/EEG signals. This may lead to positioning M/EEG-based brain age prediction on par with MRI-based brain age prediction just as MRI-based deep learning models of brain age have defined state-of-the-art performance on large datasets (Cole et al. 2017; Bashyam et al. 2020; Jonsson et al. 2019). However, more importantly, the value of M/EEG-derived brain age models should not be defined in terms of incremental improvement over MRI-based models as M/EEG-based models may enhance MRI-derived information (Engemann et al. 2020) or may be the only option available (Sun et al. 2019).

Our results nicely demonstrate a second critical merit of cross-model and cross-dataset benchmarking. It was sufficient to analyze four different sources of data until we found a perfectly legitimate EEG dataset from an academic research context (CHBP) in which our previously favored modeling techniques developed on the Cam-CAN and the TUAB data did not perform well by default. There may be good reasons for these discrepancies related to the age distribution found in the CHBP data and the fact that multiple different EEG montages were used in that dataset (see results section for detailed discussion in context). But more importantly, we did not anticipate this to happen and would have never learned about it had we confined the scope to previously analyzed datasets. Such discoveries are favored by systematic benchmarks with dataset-independent code implementation, which has the potential to lower the burden threshold for including always more datasets into model development. In the long run, we hope that this effort will stimulate new research leading to more generalizable models.

This brings us to some limitations of this work. Our work has been motivated by the absolute necessity to diversify datasets for development of M/EEG-based measures of brain health. This has led us to analyzing more than 2500 M/EEG recordings and, yet we only included four datasets. Other M/EEG datasets come to mind that would have been potentially relevant. The Human Connectome Project MEG data (Larson-Prior et al. 2013) includes MEG recordings from less than 100 participants, which we deemed insufficient for predictive regression modeling. The OMEGA data resource (Niso et al. 2016) was not accessible at the time of this investigation but would have been a good match for this study. Finally, the LIFE cohort (Loeffler et al. 2015) includes a large number of EEG recordings of participants sampled from the general population yet follows a closed / controlled access scheme. The Healthy-Brain-Network EEG data (Alexander et al. 2017) concerns a developmental cohort.

692 Despite potentially relevant similarities between brain development and aging, age prediction
693 in developmental cohorts would have exceeded the scope of the present study. Even if we
694 had integrated these resources in the present benchmark, this may have only marginally
695 enhanced the diversity covered by the current selection datasets as most public neuroscience
696 datasets come from the wealthiest nations. We hope that this situation will improve as new
697 promising international consortia and efforts emerge that focus on curating large EEG
698 datasets from diverse national and cultural contexts (Ibanez et al. 2021; Shekh Ibrahim et al.
699 2020; “Global Brain Consortium Homepage”). A second limitation of the present study
700 concerns the depth of validation. To advance our understanding of M/EEG-derived brain age,
701 more systematic comparisons against MRI-derived brain age (Xifra-Porxas et al. 2021) and
702 other measures of mental health and cognitive function are important objectives (Anatürk et
703 al. 2021; Dadi et al. 2021).

704 In the following we wish to point out a few imminent opportunities for turning the
705 limitations of the present work into future research projects, potentially, enabled by the results
706 and tools brought by the current benchmarks.

Opportunities and suggestions for follow-up research using the benchmark tools

707 *Model averaging.* In many instances, combining prediction models using model averaging
708 approaches can improve the prediction performance (O’Connor et al. 2021; Dadi et al. 2021;
709 Varoquaux et al. 2017). This could also be a practical way of combining the benchmarks into
710 a single model for subsequent generalization testing. Future studies could use this benchmark
711 to investigate model averaging approaches.

712 *The impact of deeper architectures.* An important design decision in deep neural networks is
713 the total depth of the neural network. Here we used previously published architectures
714 designed for EEG-based pathology decoding (Schirrmester et al. 2017). Future studies could
715 build on top of this benchmark to explore the importance of deep architectures for brain age
716 modeling. Specifically, it would be possible to use methods from neural architecture search,
717 e.g., AutoPyTorch (Zimmer, Lindauer, and Hutter 2021), to design better-performing
718 architectures. Since this benchmark does not only provide access to diverse datasets in an
719 identical file format, but also enables direct comparison to others, it is the optimal starting point
720 for such an optimization while at the same time avoiding overfitting the architecture to a single
721 dataset.

722 *The role of preprocessing.* While data cleaning is of major importance for extracting
723 physiologically interpretable biomarkers, predictions from machine learning models tend to be

724 far less affected by noise (Sabbagh et al. 2020). On the other hand, artifacts and noise may
725 inform predictions, potentially reducing biological specificity. Future studies could benefit from
726 this benchmark to quantify the role of artifact signals for brain age predictions and develop
727 de-confounding strategies (Du et al. 2021; Mehrabi et al. 2021; Lu, Schölkopf, and Hernández-
728 Lobato 2018; Bica, Alaa, and Van Der Schaar 2020).

729

730 *Eyes-open versus eyes-closed.* Some of the datasets analyzed in this benchmark contain
731 resting-state signals under different conditions. In the lack of strong a-priori hypotheses, here
732 we simply pooled both conditions. It is currently unclear whether the relationship between
733 eyes-closed versus eyes-open resting-state may contain valuable information about brain
734 aging. It is imaginable, however, that signals induced by transient visual deprivation may
735 reveal levels of vigilance (Wong, DeYoung, and Liu 2016), which in turn may be altered by
736 neuropsychiatric conditions (Hegerl et al. 2012). Future work could benefit from the
737 benchmark to investigate the importance of eyes-closed versus eyes-open resting-state for
738 brain age modeling.

739 *Model inspection.* The interpretability of machine learning models is essential for clinical
740 impact (Rudin 2019; Ghassemi, Oakden-Rayner, and Beam 2021). This benchmark did not
741 cover methods for explaining the role of variable importance for model predictions. Future
742 work could validate the relative importance of M/EEG signals or features for brain age
743 modeling.

744 *Exploring the link with MRI and cognitive scores.* This study established the tools and methods
745 for basic benchmarks on prediction performance. However, to build useful brain age models,
746 it is essential to validate brain-age predictions to cognitive function, measures of health or
747 clinical endpoints (Dadi et al. 2021; Cole et al. 2018; Liem et al. 2017). To further establish
748 the relative merit of M/EEG over MRI, comparisons between the modalities are essential
749 (Engemann et al. 2020). Most of the datasets covered in this benchmark include MRI data,
750 social details and psychometric scores next to the M/EEG data, providing a wealth of
751 opportunities for deep cross-dataset validation of brain age measures.

Conclusion

752 Computational benchmarks across M/EEG datasets and machine learning methods bear the
753 potential to enhance applications of machine learning in clinical neuroscience in several ways.
754 Standardization of data formats, software and analysis pipelines are important factors for the

scalability of predictive modeling of M/EEG. For stimulating the development of more generalizable machine learning models it is crucial that a critical mass of M/EEG datasets be analyzed by the international community. As the diversity of the datasets increases, generalization gaps will manifest themselves, calling for computation methods for closing these gaps. The implied learning process may eventually lead to developing more widely applicable M/EEG-based biomarkers that are clinically robust across a wide range of sociocultural contexts, clinical populations, recording sites and measurement techniques. We hope that benchmarks, tools and resources resulting from this study will facilitate investigating open scientific questions related to learning biomarkers of brain health on an ever-growing number of M/EEG datasets from increasingly diverse real-world contexts.

Acknowledgements

We would like to thank Pedro Valdés-Sosa and Jorge Bosch-Bayard and their team for the support with the Cuban Human Brain Project data and for the stimulating discussion. We would also like to thank Joseph Picone for the support with Temple University Hospital data. Finally, we would like to thank Anahit Babayan, Vadim Nikulin and Arno Villringer for the support with the LEMON dataset and the stimulating scientific discussions. We would like to thank Rik Henson and Ethan Knights for providing the Can-CAN datasets in BIDS format. We also thank Ana Radanovic and the other participants of the IDESSAI 2021 Inria-DFKI summer school for feedback and testing on earlier versions of the code and analysis developed in this project. This work was supported by the ANR BrAIN AI chair (ANR-20-CHIA-0016) and ANR AI-Cog (ANR-20-IADJ-0002) as well as by the Freiburg Graduate School of Robotics.

Author contributions

authors in alphabetical order

Conceptualization: A.G., D.E.

Data curation: A.G., A.M., D.E., H.B., L.G.

Software: A.G., A.M., D.E., D.S., H.B., L.G., R.H.

Formal analysis: A.G., D.E.

Supervision: A.G., D.E.

Funding acquisition: A.G., D.E.

Validation: A.G., D.E.

Investigation: A.G., A.M., D.E., H.B., L.G.

Visualization: A.P., D.E.

Methodology: A.G., D.E.

Project administration: D.E.

Writing—original draft: D.E.

Writing—review and editing: A.G., A.M., D.E., D.S., H.B., L.G., T.B.

Declaration of conflicts of interest

D.E. is a full-time employee of F. Hoffmann-La Roche Ltd.

H.B. receives graduate funding support from InteraXon Inc.

References

- Alexander, Lindsay M., Jasmine Escalera, Lei Ai, Charissa Andreotti, Karina Febre, Alexander Mangone, Natan Vega-Potler, et al. 2017. "An Open Resource for Transdiagnostic Research in Pediatric Mental Health and Learning Disorders." *Scientific Data* 4 (December): 170181.
- Al Zoubi, Obada, Chung Ki Wong, Rayus T. Kuplicki, Hung-Wen Yeh, Ahmad Mayeli, Hazem Refai, Martin Paulus, and Jerzy Bodurka. 2018. "Predicting Age From Brain EEG Signals—A Machine Learning Approach." *Frontiers in Aging Neuroscience* 10: 184.
- Anatürk, Melis, Tobias Kaufmann, James H. Cole, Sana Suri, Ludovica Griffanti, Enikő Zsoldos, Nicola Filippini, et al. 2021. "Prediction of Brain Age and Cognitive Age: Quantifying Brain and Cognitive Maintenance in Aging." *Human Brain Mapping* 42 (6): 1626–40.
- Ang, Kai Keng, Zheng Yang Chin, Haihong Zhang, and Cuntai Guan. 2008. "Filter Bank Common Spatial Pattern (FBCSP) in Brain-Computer Interface." In *2008 IEEE International Joint Conference on Neural Networks (IEEE World Congress on Computational Intelligence)*, 2390–97.
- Appelhoff, Stefan, Matthew Sanderson, Teon L. Brooks, Marijn van Vliet, Romain Quentin, Chris Holdgraf, Maximilien Chaumon, et al. 2019. "MNE-BIDS: Organizing Electrophysiological Data into the BIDS Format and Facilitating Their Analysis." *The Journal of Open Source Software* 4 (44). https://pure.mpg.de/rest/items/item_3192645/component/file_3192646/content.
- Arnold, Jeffrey B. 2017. "Ggthemes: Extra Themes, Scales and Geoms for 'ggplot2.'" *R Package Version* 3 (0).
- Babayan, Anahit, Miray Erbey, Deniz Kumral, Janis D. Reinelt, Andrea M. F. Reiter, Josefin Röbbig, H. Lina Schaare, et al. 2019. "A Mind-Brain-Body Dataset of MRI, EEG, Cognition, Emotion, and Peripheral Physiology in Young and Old Adults." *Scientific Data* 6 (February): 180308.
- Babiloni, Claudio, Giuliano Binetti, Andrea Cassarino, Gloria Dal Forno, Claudio Del Percio, Florinda Ferreri, Raffaele Ferri, et al. 2006. "Sources of Cortical Rhythms in Adults during Physiological Aging: A Multicentric EEG Study." *Human Brain Mapping* 27 (2): 162–72.
- Banville, Hubert, Omar Chehab, Aapo Hyvarinen, Denis Engemann, and Alexandre Gramfort. 2020. "Uncovering the Structure of Clinical EEG Signals with Self-Supervised

- Learning." *Journal of Neural Engineering*, November. <https://doi.org/10.1088/1741-2552/abca18>.
- Banville, Hubert, Sean U. N. Wood, Chris Aimone, Denis-Alexander Engemann, and Alexandre Gramfort. 2021. "Robust Learning from Corrupted EEG with Dynamic Spatial Filtering." *arXiv [cs.LG]*. arXiv. <http://arxiv.org/abs/2105.12916>.
- Bao, Pinglei, Liang She, Mason McGill, and Doris Y. Tsao. 2020. "A Map of Object Space in Primate Inferotemporal Cortex." *Nature* 583 (7814): 103–8.
- Barachant, Alexandre, Stéphane Bonnet, Marco Congedo, and Christian Jutten. 2012. "Multiclass Brain-Computer Interface Classification by Riemannian Geometry." *IEEE Transactions on Bio-Medical Engineering* 59 (4): 920–28.
- Bashyam, Vishnu M., Guray Erus, Jimit Doshi, Mohamad Habes, Ilya Nasrallah, Monica Truelove-Hill, Dhivya Srinivasan, et al. 2020. "MRI Signatures of Brain Age and Disease over the Lifespan Based on a Deep Brain Network and 14 468 Individuals Worldwide." *Brain: A Journal of Neurology* 143 (7): 2312–24.
- Bica, Ioana, Ahmed Alaa, and Mihaela Van Der Schaar. 2020. "Time Series Deconfounder: Estimating Treatment Effects over Time in the Presence of Hidden Confounders." In *Proceedings of the 37th International Conference on Machine Learning*, edited by Hal Daumé Iii and Aarti Singh, 119:884–95. Proceedings of Machine Learning Research. PMLR.
- Bosch-Bayard, Jorge, Lidice Galan, Eduardo Aubert Vazquez, Trinidad Virues Alba, and Pedro A. Valdes-Sosa. 2020. "Resting State Healthy EEG: The First Wave of the Cuban Normative Database." *Frontiers in Neuroscience* 14 (December): 555119.
- Breiman, Leo. 2001. "Random Forests." *Machine Learning* 45 (1): 5–32.
- Buitinck, Lars, Gilles Louppe, Mathieu Blondel, Fabian Pedregosa, Andreas Mueller, Olivier Grisel, Vlad Niculae, et al. 2013. "API Design for Machine Learning Software: Experiences from the Scikit-Learn Project." *arXiv [cs.LG]*. arXiv. <http://arxiv.org/abs/1309.0238>.
- Bycroft, Clare, Colin Freeman, Desislava Petkova, Gavin Band, Lloyd T. Elliott, Kevin Sharp, Allan Motyer, et al. 2018. "The UK Biobank Resource with Deep Phenotyping and Genomic Data." *Nature* 562 (7726): 203–9.
- Cabeza, Roberto, Nicole D. Anderson, Jill K. Locantore, and Anthony R. McIntosh. 2002. "Aging Gracefully: Compensatory Brain Activity in High-Performing Older Adults." *NeuroImage* 17 (3): 1394–1402.
- Chambon, Stanislas, Mathieu N. Galtier, Pierrick J. Arnal, Gilles Wainrib, and Alexandre Gramfort. 2018. "A Deep Learning Architecture for Temporal Sleep Stage Classification Using Multivariate and Multimodal Time Series." *IEEE Transactions on Neural Systems and Rehabilitation Engineering: A Publication of the IEEE Engineering in Medicine and Biology Society* 26 (4): 758–69.
- Cheveigné, Alain de, and Lucas C. Parra. 2014. "Joint Decorrelation, a Versatile Tool for Multichannel Data Analysis." *NeuroImage* 98 (September): 487–505.
- Choy, Tricia, Elizabeth Baker, and Katherine Stavropoulos. 2021. "Systemic Racism in EEG Research: Considerations and Potential Solutions." *Affective Science*, May. <https://doi.org/10.1007/s42761-021-00050-0>.
- Cole, James H. 2020. "Multimodality Neuroimaging Brain-Age in UK Biobank: Relationship to Biomedical, Lifestyle, and Cognitive Factors." *Neurobiology of Aging* 92 (August): 34–42.
- Cole, James H., and Katja Franke. 2017. "Predicting Age Using Neuroimaging: Innovative Brain Ageing Biomarkers." *Trends in Neurosciences* 40 (12): 681–90.
- Cole, James H., Katja Franke, and Nicolas Cherbuin. 2019. "Quantification of the Biological Age of the Brain Using Neuroimaging." In *Biomarkers of Human Aging*, edited by Alexey Moskalev, 293–328. Cham: Springer International Publishing.
- Cole, James H., Rudra P. K. Poudel, Dimosthenis Tsagkrasoulis, Matthan W. A. Caan, Claire Steves, Tim D. Spector, and Giovanni Montana. 2017. "Predicting Brain Age with Deep Learning from Raw Imaging Data Results in a Reliable and Heritable Biomarker." *NeuroImage* 163 (December): 115–24.

- Cole, J. H., S. J. Ritchie, M. E. Bastin, M. C. Valdés Hernández, S. Muñoz Maniega, N. Royle, J. Corley, et al. 2018. "Brain Age Predicts Mortality." *Molecular Psychiatry* 23 (5): 1385–92.
- Dadi, Kamalaker, Gaël Varoquaux, Josselin Houenou, Danilo Bzdok, Bertrand Thirion, and Denis Engemann. 2021. "Population Modeling with Machine Learning Can Enhance Measures of Mental Health." *GigaScience* 10 (10). <https://doi.org/10.1093/gigascience/giab071>.
- Dähne, Sven, Frank C. Meinecke, Stefan Haufe, Johannes Höhne, Michael Tangermann, Klaus-Robert Müller, and Vadim V. Nikulin. 2014. "SPoC: A Novel Framework for Relating the Amplitude of Neuronal Oscillations to Behaviorally Relevant Parameters." *NeuroImage* 86 (February): 111–22.
- Damoiseaux, J. S., C. F. Beckmann, E. J. Sanz Arigita, F. Barkhof, Ph Scheltens, C. J. Stam, S. M. Smith, and S. A. R. B. Rombouts. 2008. "Reduced Resting-State Brain Activity in the 'Default Network' in Normal Aging." *Cerebral Cortex* 18 (8): 1856–64.
- Denissen, Stijn, Denis Alexander Engemann, Alexander De Cock, Lars Costers, Johan Baijot, Jorne Laton, Iris-Katharina Penner, et al. 2021. "Brain Age as a Surrogate Marker for Information Processing Speed in Multiple Sclerosis." *medRxiv*.
- Devarajan, Kavya, S. Bagyaraj, Vinitha Balasampath, Jyostna E., and Jayasri K. 2014. "EEG-Based Epilepsy Detection and Prediction." *IACSIT International Journal of Engineering and Technology* 6 (3): 212–16.
- Dosenbach, Nico U. F., Binyam Nardos, Alexander L. Cohen, Damien A. Fair, Jonathan D. Power, Jessica A. Church, Steven M. Nelson, et al. 2010. "Prediction of Individual Brain Maturity Using fMRI." *Science* 329 (5997): 1358–61.
- Driscoll, I., C. Davatzikos, Y. An, X. Wu, D. Shen, M. Kraut, and S. M. Resnick. 2009. "Longitudinal Pattern of Regional Brain Volume Change Differentiates Normal Aging from MCI." *Neurology* 72 (22): 1906–13.
- Du, Mengnan, Fan Yang, Na Zou, and Xia Hu. 2021. "Fairness in Deep Learning: A Computational Perspective." *IEEE Intelligent Systems* 36 (4): 25–34.
- Duncan, L., H. Shen, B. Gelaye, J. Meijssen, K. Ressler, M. Feldman, R. Peterson, and B. Domingue. 2019. "Analysis of Polygenic Risk Score Usage and Performance in Diverse Human Populations." *Nature Communications* 10 (1): 3328.
- Engemann, Denis A., Oleh Kozynets, David Sabbagh, Guillaume Lemaître, Gaël Varoquaux, Franziskus Liem, and Alexandre Gramfort. 2020. "Combining Magnetoencephalography with Magnetic Resonance Imaging Enhances Learning of Surrogate-Biomarkers." *eLife* 9 (May). <https://doi.org/10.7554/eLife.54055>.
- Engemann, Denis A., Federico Raimondo, Jean-Rémi King, Benjamin Rohaut, Gilles Louppe, Frédéric Faugeras, Jitka Annen, et al. 2018. "Robust EEG-Based Cross-Site and Cross-Protocol Classification of States of Consciousness." *Brain: A Journal of Neurology* 141 (11): 3179–92.
- Esteller, R., J. Echauz, T. Tchong, B. Litt, and B. Pless. 2001. "Line Length: An Efficient Feature for Seizure Onset Detection." In *2001 Conference Proceedings of the 23rd Annual International Conference of the IEEE Engineering in Medicine and Biology Society*, 2:1707–10 vol.2.
- Esteller, R., G. Vachtsevanos, J. Echauz, and B. Litt. 2001. "A Comparison of Waveform Fractal Dimension Algorithms." *IEEE Transactions on Circuits and Systems I: Fundamental Theory and Applications* 48 (2): 177–83.
- Ewers, Michael, Reisa A. Sperling, William E. Klunk, Michael W. Weiner, and Harald Hampel. 2011. "Neuroimaging Markers for the Prediction and Early Diagnosis of Alzheimer's Disease Dementia." *Trends in Neurosciences* 34 (8): 430–42.
- Ferrucci, Luigi, Marta Gonzalez-Freire, Elisa Fabbri, Eleanor Simonsick, Toshiko Tanaka, Zenobia Moore, Shabnam Salimi, Felipe Sierra, and Rafael de Cabo. 2020. "Measuring Biological Aging in Humans: A Quest." *Aging Cell* 19 (2): e13080.
- Fischl, Bruce. 2012. "FreeSurfer." *NeuroImage* 62 (2): 774–81.
- Fry, Anna, Thomas J. Littlejohns, Cathie Sudlow, Nicola Doherty, Ligia Adamska, Tim Sprosen, Rory Collins, and Naomi E. Allen. 2017. "Comparison of Sociodemographic

- and Health-Related Characteristics of UK Biobank Participants with Those of the General Population.” *American Journal of Epidemiology* 186 (9): 1026–34.
- Garcés, Pilar, David López-Sanz, Fernando Maestú, and Ernesto Pereda. 2017. “Choice of Magnetometers and Gradiometers after Signal Space Separation.” *Sensors* 17 (12). <https://doi.org/10.3390/s17122926>.
- Gaubert, Sinead, Federico Raimondo, Marion Houot, Marie-Constance Corsi, Lionel Naccache, Jacobo Diego Sitt, Bertrand Hermann, et al. 2019. “EEG Evidence of Compensatory Mechanisms in Preclinical Alzheimer’s Disease.” *Brain: A Journal of Neurology* 142 (7): 2096–2112.
- Gemein, Lukas A. W., Robin T. Schirrmeyer, Patryk Chrabąszcz, Daniel Wilson, Joschka Boedecker, Andreas Schulze-Bonhage, Frank Hutter, and Tonio Ball. 2020. “Machine-Learning-Based Diagnostics of EEG Pathology.” *NeuroImage* 220 (October): 117021.
- Ghassemi, Marzyeh, Luke Oakden-Rayner, and Andrew L. Beam. 2021. “The False Hope of Current Approaches to Explainable Artificial Intelligence in Health Care.” *The Lancet. Digital Health* 3 (11): e745–50.
- “Global Brain Consortium Homepage.” n.d. Accessed November 30, 2021. <https://globalbrainconsortium.org/>.
- Gonneaud, Julie, Alex T. Baria, Alexa Pichet Binette, Brian A. Gordon, Jasmeer P. Chhatwal, Carlos Cruchaga, Mathias Jucker, et al. 2021. “Accelerated Functional Brain Aging in Pre-Clinical Familial Alzheimer’s Disease.” *Nature Communications* 12 (1): 1–17.
- Gorgolewski, Krzysztof J., Tibor Auer, Vince D. Calhoun, R. Cameron Craddock, Samir Das, Eugene P. Duff, Guillaume Flandin, et al. 2016. “The Brain Imaging Data Structure, a Format for Organizing and Describing Outputs of Neuroimaging Experiments.” *Scientific Data* 3 (June): 160044.
- Gramfort, Alexandre, Martin Luessi, Eric Larson, Denis A. Engemann, Daniel Strohmeier, Christian Brodbeck, Roman Goj, et al. 2013. “MEG and EEG Data Analysis with MNE-Python.” *Frontiers in Neuroscience* 7 (December): 267.
- Gramfort, Alexandre, Martin Luessi, Eric Larson, Denis A. Engemann, Daniel Strohmeier, Christian Brodbeck, Lauri Parkkonen, and Matti S. Hämäläinen. 2014. “MNE Software for Processing MEG and EEG Data.” *NeuroImage* 86 (February): 446–60.
- Güntekin, Bahar, Tuba Aktürk, Xianghong Arakaki, Laura Bonanni, Claudio Del Percio, Rebecca Edelmayer, Francesca Farina, et al. 2021. “Are There Consistent Abnormalities in Event-related EEG Oscillations in Patients with Alzheimer’s Disease Compared to Other Diseases Belonging to Dementia?” *Psychophysiology*, August. <https://doi.org/10.1111/psyp.13934>.
- Harati, A., S. López, I. Obeid, J. Picone, M. P. Jacobson, and S. Tobochnik. 2014. “The TUH EEG CORPUS: A Big Data Resource for Automated EEG Interpretation.” In *2014 IEEE Signal Processing in Medicine and Biology Symposium (SPMB)*, 1–5.
- Harris, Charles R., K. Jarrod Millman, Stéfan J. van der Walt, Ralf Gommers, Pauli Virtanen, David Cournapeau, Eric Wieser, et al. 2020. “Array Programming with NumPy.” *Nature* 585 (7825): 357–62.
- Hastie, Trevor, Robert Tibshirani, Jerome Friedman, and James Franklin. 2005. “The Elements of Statistical Learning: Data Mining, Inference and Prediction.” *The Mathematical Intelligencer* 27 (2): 83–85.
- Hegerl, Ulrich, Kathrin Wilk, Sebastian Olbrich, Peter Schoenknecht, and Christian Sander. 2012. “Hyperstable Regulation of Vigilance in Patients with Major Depressive Disorder.” *The World Journal of Biological Psychiatry: The Official Journal of the World Federation of Societies of Biological Psychiatry* 13 (6): 436–46.
- Henrich, J., and S. Heine. 2010. “The Weirdest People in the World?” *Behavioral and Brain Sciences* 33 (2-3): 61-83.
- Hernandez-Gonzalez, Gertrudis, Maria L. Bringas-Vega, Lidice Galán-Garcia, Jorge Bosch-Bayard, Yenisleidy Lorenzo-Ceballos, Lester Melle-Garcia, Lourdes Valdes-Urrutia, Marcia Cobas-Ruiz, Pedro A. Valdes-Sosa, and Cuban Human Brain Mapping Project (CHBMP). 2011. “Multimodal Quantitative Neuroimaging Databases and Methods: The

- Cuban Human Brain Mapping Project." *Clinical EEG and Neuroscience: Official Journal of the EEG and Clinical Neuroscience Society (ENCS)* 42 (3): 149–59.
- He, Tong, Ru Kong, Avram J. Holmes, Minh Nguyen, Mert R. Sabuncu, Simon B. Eickhoff, Danilo Bzdok, Jiashi Feng, and B. T. Thomas Yeo. 2020. "Deep Neural Networks and Kernel Regression Achieve Comparable Accuracies for Functional Connectivity Prediction of Behavior and Demographics." *NeuroImage* 206 (February): 116276.
- Ibanez, Agustin, Mario A. Parra, Christopher Butler, and Latin America and the Caribbean Consortium on Dementia (LAC-CD). 2021. "The Latin America and the Caribbean Consortium on Dementia (LAC-CD): From Networking to Research to Implementation Science." *Journal of Alzheimer's Disease: JAD* 82 (s1): S379–94.
- Inouye, T., K. Shinosaki, H. Sakamoto, S. Toi, S. Ukai, A. Iyama, Y. Katsuda, and M. Hirano. 1991. "Quantification of EEG Irregularity by Use of the Entropy of the Power Spectrum." *Electroencephalography and Clinical Neurophysiology* 79 (3): 204–10.
- Jas, Mainak, Denis A. Engemann, Yousra Bekhti, Federico Raimondo, and Alexandre Gramfort. 2017. "Autoreject: Automated Artifact Rejection for MEG and EEG Data." *NeuroImage* 159 (October): 417–29.
- Jas, Mainak, Eric Larson, Denis A. Engemann, Jaakko Leppäkangas, Samu Taulu, Matti Hämäläinen, and Alexandre Gramfort. 2018. "A Reproducible MEG/EEG Group Study With the MNE Software: Recommendations, Quality Assessments, and Good Practices." *Frontiers in Neuroscience* 12: 530.
- Jayaram, Vinay, and Alexandre Barachant. 2018. "MOABB: Trustworthy Algorithm Benchmarking for BCIs." *Journal of Neural Engineering* 15 (6): 066011.
- Jonsson, B. A., G. Bjornsdottir, T. E. Thorgeirsson, L. M. Ellingsen, G. Bragi Walters, D. F. Gudbjartsson, H. Stefansson, K. Stefansson, and M. O. Ulfarsson. 2019. "Brain Age Prediction Using Deep Learning Uncovers Associated Sequence Variants." *Nature Communications* 10 (1): 5409.
- Kernbach, Julius M., B. T. Thomas Yeo, Jonathan Smallwood, Daniel S. Margulies, Michel Thiebaut de Schotten, Henrik Walter, Mert R. Sabuncu, et al. 2018. "Subspecialization within Default Mode Nodes Characterized in 10,000 UK Biobank Participants." *Proceedings of the National Academy of Sciences of the United States of America* 115 (48): 12295–300.
- Khan, Sheraz, Javeria A. Hashmi, Fahimeh Mamashli, Konstantinos Michmizos, Manfred G. Kitzbichler, Hari Bharadwaj, Yousra Bekhti, et al. 2018. "Maturation Trajectories of Cortical Resting-State Networks Depend on the Mediating Frequency Band." *NeuroImage* 174 (July): 57–68.
- Kietzmann, Tim C., Patrick McClure, and Nikolaus Kriegeskorte. 2019. "Deep Neural Networks in Computational Neuroscience." In *Oxford Research Encyclopedia of Neuroscience*.
- King, J-R, and S. Dehaene. 2014. "Characterizing the Dynamics of Mental Representations: The Temporal Generalization Method." *Trends in Cognitive Sciences* 18 (4): 203–10.
- King, J-R, L. Gwilliams, C. Holdgraf, and J. Sassenhagen. 2018. "Encoding and Decoding Neuronal Dynamics: Methodological Framework to Uncover the Algorithms of Cognition." <https://hal.archives-ouvertes.fr/hal-01848442/>.
- King, Kevin S., Julia Kozlitina, Roger N. Rosenberg, Ronald M. Peshock, Roderick W. McColl, and Christine K. Garcia. 2014. "Effect of Leukocyte Telomere Length on Total and Regional Brain Volumes in a Large Population-Based Cohort." *JAMA Neurology* 71 (10): 1247–54.
- Kostas, Demetres, and Frank Rudzicz. 2020. "Thinker Invariance: Enabling Deep Neural Networks for BCI across More People." *Journal of Neural Engineering* 17 (5): 056008.
- Larson-Prior, L. J., R. Oostenveld, S. Della Penna, G. Michalareas, F. Prior, A. Babajani-Feremi, J-M Schoffelen, et al. 2013. "Adding Dynamics to the Human Connectome Project with MEG." *NeuroImage* 80 (October): 190–201.
- LeCun, Yann, Patrick Haffner, Léon Bottou, and Yoshua Bengio. 1999. "Object Recognition with Gradient-Based Learning." In *Shape, Contour and Grouping in Computer Vision*, edited by David A. Forsyth, Joseph L. Mundy, Vito di Gesù, and Roberto Cipolla, 319–

45. Berlin, Heidelberg: Springer Berlin Heidelberg.
- Leeuwen, K. G. van, H. Sun, M. Tabaeizadeh, A. F. Struck, M. J. A. M. van Putten, and M. B. Westover. 2019. "Detecting Abnormal Electroencephalograms Using Deep Convolutional Networks." *Clinical Neurophysiology: Official Journal of the International Federation of Clinical Neurophysiology* 130 (1): 77–84.
- Leonelli, S. 2016. "Data-Centric Biology." <https://www.degruyter.com/document/doi/10.7208/9780226416502/html>.
- Liem, Franziskus, Gaël Varoquaux, Jana Kynast, Frauke Beyer, Shahrzad Kharabian Masouleh, Julia M. Huntenburg, Leonie Lampe, et al. 2017. "Predicting Brain-Age from Multimodal Imaging Data Captures Cognitive Impairment." *NeuroImage* 148 (March): 179–88.
- Loeffler, Markus, Christoph Engel, Peter Ahnert, Dorothee Alfermann, Katrin Arelin, Ronny Baber, Frank Beutner, et al. 2015. "The LIFE-Adult-Study: Objectives and Design of a Population-Based Cohort Study with 10,000 Deeply Phenotyped Adults in Germany." *BMC Public Health* 15 (July): 691.
- Lu, Chaochao, Bernhard Schölkopf, and José Miguel Hernández-Lobato. 2018. "Deconfounding Reinforcement Learning in Observational Settings." *arXiv [cs.LG]*. [arXiv. http://arxiv.org/abs/1812.10576](http://arxiv.org/abs/1812.10576).
- Mather, Karen Anne, Anthony Francis Jorm, Ruth Adeline Parslow, and Helen Christensen. 2011. "Is Telomere Length a Biomarker of Aging? A Review." *The Journals of Gerontology. Series A, Biological Sciences and Medical Sciences* 66 (2): 202–13.
- McKinney, Wes, and Others. 2011. "Pandas: A Foundational Python Library for Data Analysis and Statistics." *Python for High Performance and Scientific Computing* 14 (9): 1–9.
- Mehrabi, Ninareh, Fred Morstatter, Nripsuta Saxena, Kristina Lerman, and Aram Galstyan. 2021. "A Survey on Bias and Fairness in Machine Learning." *ACM Comput. Surv.*, 115, 54 (6): 1–35.
- Niso, Guiomar, Krzysztof J. Gorgolewski, Elizabeth Bock, Teon L. Brooks, Guillaume Flandin, Alexandre Gramfort, Richard N. Henson, et al. 2018. "MEG-BIDS, the Brain Imaging Data Structure Extended to Magnetoencephalography." *Scientific Data* 5 (June): 180110.
- Niso, Guiomar, Christine Rogers, Jeremy T. Moreau, Li-Yuan Chen, Cecile Madjar, Samir Das, Elizabeth Bock, et al. 2016. "OMEGA: The Open MEG Archive." *NeuroImage* 124 (Pt B): 1182–87.
- Obeid, Iyad, and Joseph Picone. 2016. "The Temple University Hospital EEG Data Corpus." *Frontiers in Neuroscience* 10 (May): 196.
- O'Connor, David, Evelyn M. R. Lake, Dustin Scheinost, and R. Todd Constable. 2021. "Resample Aggregating Improves the Generalizability of Connectome Predictive Modeling." *NeuroImage* 236 (August): 118044.
- Oostenveld, R., and P. Praamstra. 2001. "The Five Percent Electrode System for High-Resolution EEG and ERP Measurements." *Clinical Neurophysiology: Official Journal of the International Federation of Clinical Neurophysiology* 112 (4): 713–19.
- Päivinen, Niina, Seppo Lammi, Asla Pitkänen, Jari Nissinen, Markku Penttonen, and Tapio Grönfors. 2005. "Epileptic Seizure Detection: A Nonlinear Viewpoint." *Computer Methods and Programs in Biomedicine* 79 (2): 151–59.
- Paszke, Adam, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, et al. 2019. "PyTorch: An Imperative Style, High-Performance Deep Learning Library." In *Advances in Neural Information Processing Systems*, edited by H. Wallach, H. Larochelle, A. Beygelzimer, F. d'Alché-Buc, E. Fox, and R. Garnett. Vol. 32. Curran Associates, Inc. <https://proceedings.neurips.cc/paper/2019/file/bdbca288fee7f92f2bfa9f7012727740-Paper.pdf>.
- Pedersen, Thomas Lin. 2019. "Patchwork: The Composer of Plots." *R Package Version* 1 (0).
- Pedregosa, F., G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, et al.

2011. "Scikit-Learn: Machine Learning in Python." *Journal of Machine Learning Research: JMLR* 12: 2825–30.
- Pernet, Cyril R., Stefan Appelhoff, Krzysztof J. Gorgolewski, Guillaume Flandin, Christophe Phillips, Arnaud Delorme, and Robert Oostenveld. 2019. "EEG-BIDS, an Extension to the Brain Imaging Data Structure for Electroencephalography." *Scientific Data* 6 (1): 103.
- Perslev, Mathias, Sune Darkner, Lykke Kempfner, Miki Nikolic, Poul Jørgen Jennum, and Christian Igel. 2021. "U-Sleep: Resilient High-Frequency Sleep Staging." *NPJ Digital Medicine* 4 (1): 72.
- Poldrack, Russell A., Grace Huckins, and Gael Varoquaux. 2020. "Establishment of Best Practices for Evidence for Prediction: A Review." *JAMA Psychiatry (Chicago, Ill.)* 77 (5): 534–40.
- Raffel, Joel, James Cole, Chris Record, Sujata Sridharan, David Sharp, and Richard Nicholas. 2017. "Brain Age: A Novel Approach to Quantify the Impact of Multiple Sclerosis on the Brain (P1.371)." *Neurology* 88 (16 Supplement). https://n.neurology.org/content/88/16_Supplement/P1.371.short.
- Richman, J. S., and J. R. Moorman. 2000. "Physiological Time-Series Analysis Using Approximate Entropy and Sample Entropy." *American Journal of Physiology. Heart and Circulatory Physiology* 278 (6): H2039–49.
- Roberts, S. J., W. Penny, and I. Rezek. 1999. "Temporal and Spatial Complexity Measures for Electroencephalogram Based Brain-Computer Interfacing." *Medical & Biological Engineering & Computing* 37 (1): 93–98.
- Rodrigues, Pedro Luiz Coelho, Christian Jutten, and Marco Congedo. 2019. "Riemannian Procrustes Analysis: Transfer Learning for Brain-Computer Interfaces." *IEEE Transactions on Bio-Medical Engineering* 66 (8): 2390–2401.
- Roy, Yannick, Hubert Banville, Isabela Albuquerque, Alexandre Gramfort, Tiago H. Falk, and Jocelyn Faubert. 2019. "Deep Learning-Based Electroencephalography Analysis: A Systematic Review." *Journal of Neural Engineering* 16 (5): 051001.
- Rudin, Cynthia. 2019. "Stop Explaining Black Box Machine Learning Models for High Stakes Decisions and Use Interpretable Models Instead." *Nature Machine Intelligence* 1 (5): 206–15.
- Sabbagh, D., P. Ablin, G. Varoquaux, and A. Gramfort. 2019. "Manifold-Regression to Predict from MEG/EEG Brain Signals without Source Modeling." *arXiv Preprint arXiv*. <https://arxiv.org/abs/1906.02687>.
- Sabbagh, David, Pierre Ablin, Gaël Varoquaux, Alexandre Gramfort, and Denis A. Engemann. 2020. "Predictive Regression Modeling with MEG/EEG: From Source Power to Signals and Cognitive States." *NeuroImage* 222 (November): 116893.
- Scahill, Rachael I., Chris Frost, Rhian Jenkins, Jennifer L. Whitwell, Martin N. Rossor, and Nick C. Fox. 2003. "A Longitudinal Study of Brain Volume Changes in Normal Aging Using Serial Registered Magnetic Resonance Imaging." *Archives of Neurology* 60 (7): 989–94.
- Schiratti, J-B, Jean-Eudes Le Douget, Michel Le Van Quyen, Slim Essid, and Alexandre Gramfort. 2018. "An Ensemble Learning Approach to Detect Epileptic Seizures from Long Intracranial EEG Recordings." In *2018 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 856–60.
- Schiratti, J-B, Jean-Eudes Le Douget, Michel Le Van Quyen, Slim Essid, and Alexandre Gramfort. 2018. "An Ensemble Learning Approach to Detect Epileptic Seizures from Long Intracranial EEG Recordings." *2018 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. <https://doi.org/10.1109/icassp.2018.8461489>.
- Schirrmeyer, Robin Tibor, Jost Tobias Springenberg, Lukas Dominique Josef Fiederer, Martin Glasstetter, Katharina Eggersperger, Michael Tangermann, Frank Hutter, Wolfram Burgard, and Tonio Ball. 2017. "Deep Learning with Convolutional Neural Networks for EEG Decoding and Visualization." *Human Brain Mapping* 38 (11): 5391–5420.
- Schulz, Marc-Andre, B. T. Thomas Yeo, Joshua T. Vogelstein, Janaina Mourao-Miranada,

- Jakob N. Kather, Konrad Kording, Blake Richards, and Danilo Bzdok. 2020. "Different Scaling of Linear Models and Deep Learning in UKBiobank Brain Images versus Machine-Learning Datasets." *Nature Communications*. <https://doi.org/10.1038/s41467-020-18037-z>.
- Schumacher, Julia, Nicola J. Ray, Calum A. Hamilton, Paul C. Donaghy, Michael Firbank, Gemma Roberts, Louise Allan, et al. 2021. "Cholinergic White Matter Pathways in Dementia with Lewy Bodies and Alzheimer's Disease." *Brain: A Journal of Neurology*, October. <https://doi.org/10.1093/brain/awab372>.
- Shafito, Meredith A., Lorraine K. Tyler, Marie Dixon, Jason R. Taylor, James B. Rowe, Rhodri Cusack, Andrew J. Calder, et al. 2014. "The Cambridge Centre for Ageing and Neuroscience (Cam-CAN) Study Protocol: A Cross-Sectional, Lifespan, Multidisciplinary Examination of Healthy Cognitive Ageing." *BMC Neurology* 14 (October): 204.
- Shekh Ibrahim, Sharifah Aida, Nurfaten Hamzah, Athirah Raihanah Abdul Wahab, Jafri Malin Abdullah, Nurul Hashimah Ahamed Hassain Malim, Putra Sumari, Zamzuri Idris, et al. 2020. "Big Brain Data Initiative in Universiti Sains Malaysia: Challenges in Brain Mapping for Malaysia." *The Malaysian Journal of Medical Sciences: MJMS* 27 (4): 1–8.
- Sitt, Jacobo Diego, Jean Remi King, Imen El Karoui, Benjamin Rohaut, Frederic Faugeras, Alexandre Gramfort, Laurent Cohen, Mariano Sigman, Stanislas Dehaene, and Lionel Naccache. 2014. "Large Scale Screening of Neural Signatures of Consciousness in Patients in a Vegetative or Minimally Conscious State." *Brain: A Journal of Neurology* 137 (8): 2258–70.
- Smith, Stephen M., Thomas E. Nichols, Diego Vidaurre, Anderson M. Winkler, Timothy E. J. Behrens, Matthew F. Glasser, Kamil Ugurbil, Deanna M. Barch, David C. Van Essen, and Karla L. Miller. 2015. "A Positive-Negative Mode of Population Covariation Links Brain Connectivity, Demographics and Behavior." *Nature Neuroscience* 18 (11): 1565–67.
- Spiegelhalter, David. 2016. "How Old Are You, Really? Communicating Chronic Risk through 'effective Age' of Your Body and Organs." *BMC Medical Informatics and Decision Making* 16 (1). <https://doi.org/10.1186/s12911-016-0342-z>.
- Stokes, Mark G., Michael J. Wolff, and Eelke Spaak. 2015. "Decoding Rich Spatial Information with High Temporal Resolution." *Trends in Cognitive Sciences* 19 (11): 636–38.
- Sun, Haoqi, Luis Paixao, Jefferson T. Oliva, Balaji Goparaju, Diego Z. Carvalho, Kicky G. van Leeuwen, Oluwaseun Akeju, et al. 2019. "Brain Age from the Electroencephalogram of Sleep." *Neurobiology of Aging* 74 (February): 112–20.
- Taulu, Samu, Juha Simola, and Matti Kajola. 2005. "Applications of the Signal Space Separation Method." *Signal Processing, IEEE Transactions on* 53 (9): 3359–72.
- Taylor, Jason R., Nitin Williams, Rhodri Cusack, Tibor Auer, Meredith A. Shafito, Marie Dixon, Lorraine K. Tyler, Richard N. Henson, and Others. 2017. "The Cambridge Centre for Ageing and Neuroscience (Cam-CAN) Data Repository: Structural and Functional MRI, MEG, and Cognitive Data from a Cross-Sectional Adult Lifespan Sample." *NeuroImage* 144: 262–69.
- Teixeira, C. A., B. Direito, H. Feldwisch-Drentrup, M. Valderrama, R. P. Costa, C. Alvarado-Rojas, S. Nikolopoulos, et al. 2011. "EPILAB: A Software Package for Studies on the Prediction of Epileptic Seizures." *Journal of Neuroscience Methods* 200 (2): 257–71.
- Tibor Schirrmester, Robin, Lukas Gemein, Katharina Eggensperger, Frank Hutter, and Tonio Ball. 2017. "Deep Learning with Convolutional Neural Networks for Decoding and Visualization of EEG Pathology." *arXiv E-Prints*, August, arXiv:1708.08012.
- Tietz, Marian, T. J. Fan, D. Nouri, and Others. 2017. "Skorch: A Scikit-Learn Compatible Neural Network Library That Wraps PyTorch." July.
- Valdes-Sosa, Pedro A., Lidice Galan-Garcia, Jorge Bosch-Bayard, Maria L. Bringas-Vega, Eduardo Aubert-Vazquez, Iris Rodriguez-Gil, Samir Das, et al. 2021. "The Cuban Human Brain Mapping Project, a Young and Middle Age Population-Based EEG, MRI, and Cognition Dataset." *Scientific Data* 8 (1): 45.
- Van Essen, David C., Stephen M. Smith, Deanna M. Barch, Timothy E. J. Behrens, Essa

- Yacoub, Kamil Ugurbil, and WU-Minn HCP Consortium. 2013. "The WU-Minn Human Connectome Project: An Overview." *NeuroImage* 80 (October): 62–79.
- Varoquaux, Gaël, Pradeep Reddy Raamana, Denis A. Engemann, Andrés Hoyos-Idrobo, Yannick Schwartz, and Bertrand Thirion. 2017. "Assessing and Tuning Brain Decoders: Cross-Validation, Caveats, and Guidelines." *NeuroImage* 145 (Pt B): 166–79.
- Virtanen, Pauli, Ralf Gommers, Travis E. Oliphant, Matt Haberland, Tyler Reddy, David Cournapeau, Evgeni Burovski, et al. 2020. "SciPy 1.0: Fundamental Algorithms for Scientific Computing in Python." *Nature Methods* 17 (3): 261–72.
- Völker, Martin, Robin T. Schirrmeister, Lukas D. J. Fiederer, Wolfram Burgard, and Tonio Ball. 2018. "Deep Transfer Learning for Error Decoding from Non-Invasive EEG." In *2018 6th International Conference on Brain-Computer Interface (BCI)*, 1–6.
- Walhovd, K. B., A. M. Fjell, J. Brewer, L. K. McEvoy, C. Fennema-Notestine, D. J. Hagler Jr, R. G. Jennings, D. Karow, A. M. Dale, and Alzheimer's Disease Neuroimaging Initiative. 2010. "Combining MR Imaging, Positron-Emission Tomography, and CSF Biomarkers in the Diagnosis and Prognosis of Alzheimer Disease." *AJNR. American Journal of Neuroradiology* 31 (2): 347–54.
- Wickham, Hadley. 2011. "Ggplot2." *Wiley Interdisciplinary Reviews. Computational Statistics* 3 (2): 180–85.
- Wong, Chi Wah, Pamela N. DeYoung, and Thomas T. Liu. 2016. "Differences in the Resting-State fMRI Global Signal Amplitude between the Eyes Open and Eyes Closed States Are Related to Changes in EEG Vigilance." *NeuroImage* 124 (Pt A): 24–31.
- Wrigglesworth, Jo, Nurathifah Yaacob, Phillip Ward, Robyn L. Woods, John McNeil, Elsdon Storey, Gary Egan, et al. 2021. "Brain-Predicted Age Difference Is Associated with Cognitive Processing in Later-Life." *Neurobiology of Aging*, October. <https://doi.org/10.1016/j.neurobiolaging.2021.10.007>.
- Xifra-Porxas, Alba, Arna Ghosh, Georgios D. Mitsis, and Marie-Hélène Boudrias. 2021. "Estimating Brain Age from Structural MRI and MEG Data: Insights from Dimensionality Reduction Techniques." *NeuroImage* 231 (117822): 117822.
- Yamins, Daniel L. K., and James J. DiCarlo. 2016. "Using Goal-Driven Deep Learning Models to Understand Sensory Cortex." *Nature Neuroscience* 19 (3): 356–65.
- Ye, Elissa, Haoqi Sun, Michael J. Leone, Luis Paixao, Robert J. Thomas, Alice D. Lam, and M. Brandon Westover. 2020. "Association of Sleep Electroencephalography-Based Brain Age Index With Dementia." *JAMA Network Open* 3 (9): e2017357.
- Yger, Florian, Maxime Berar, and Fabien Lotte. 2017. "Riemannian Approaches in Brain-Computer Interfaces: A Review." *IEEE Transactions on Neural Systems and Rehabilitation Engineering: A Publication of the IEEE Engineering in Medicine and Biology Society* 25 (10): 1753–62.
- Zimmer, Lucas, Marius Lindauer, and Frank Hutter. 2021. "Auto-Pytorch: Multi-Fidelity MetaLearning for Efficient and Robust AutoDL." *IEEE Transactions on Pattern Analysis and Machine Intelligence* 43 (9): 3079–90.