

Feature-based Molecular Networking in the GNPS Analysis Environment

Louis Felix Nothias,^{1,2,#} Daniel Petras,^{1,2,3,#} Robin Schmid,⁴ Kai Dührkop,⁵ Johannes Rainer,⁶ Abinash Sarvepalli,^{1,2} Ivan Protsyuk,⁷ Madeleine Ernst,^{1,2,8} Hiroshi Tsugawa,^{9,10} Markus Fleischauer,⁵ Fabian Aicheler,^{11,12} Alexander Aksenov,^{1,2} Oliver Alka,^{11,12} Pierre-Marie Allard,¹³ Aiko Barsch,¹⁴ Xavier Cachet,¹⁵ Mauricio Caraballo,^{1,2} Ricardo R. Da Silva,^{2,16} Tam Dang,^{2,17} Neha Garg,¹⁸ Julia M. Gauglitz,^{1,2} Alexey Gurevich,¹⁹ Giorgis Isaac,²⁰ Alan K. Jarmusch,^{1,2} Zdeněk Kameník,²¹ Kyo Bin Kang,^{1,2,22} Nikolas Kessler,¹⁴ Irina Koester,^{1,2,3} Ansgar Korf,⁴ Audrey Le Gouellec,²³ Marcus Ludwig,⁵ Christian Martin H.,²⁴ Laura-Isobel McCall,²⁵ Jonathan McSayles,²⁶ Sven W. Meyer,¹⁴ Hosein Mohimani,²⁷ Mustafa Morsy,²⁸ Oriane Moyne,^{23,29} Steffen Neumann,^{30,31} Heiko Neuweiger,¹⁴ Ngoc Hung Nguyen,^{1,2} Melissa Nothias-Esposito,^{1,2} Julien Paolini,³² Vanessa V. Phelan,³³ Tomáš Pluskal,³⁴ Robert A. Quinn,³⁵ Simon Rogers,³⁶ Bindesh Shrestha,¹⁹ Anupriya Tripathi,^{1,29,37} Justin J.J. van der Hooft,^{1,2,38} Fernando Vargas,^{1,2} Kelly C. Weldon,^{1,2,39} Michael Witting,⁴⁰ Heejung Yang,⁴¹ Zheng Zhang,^{1,2} Florian Zubeil,¹⁴ Oliver Kohlbacher,^{11,12,42,43} Sebastian Böcker,⁵ Theodore Alexandrov,^{1,2,7} Nuno Bandeira,^{1,2,44} Mingxun Wang,^{1,2,44*} and Pieter C. Dorrestein^{1,2,29,39,*}

1. Skaggs of Pharmacy and Pharmaceutical Sciences, University of California San Diego, La Jolla, San Diego, CA, USA
2. Collaborative Mass Spectrometry Innovation Center, University of California San Diego, La Jolla, San Diego, CA, USA
3. Scripps Institution of Oceanography, University of California San Diego, La Jolla, CA, USA
4. Institute of Inorganic and Analytical Chemistry, University of Münster, Münster, Germany
5. Chair for Bioinformatics, Friedrich-Schiller-University Jena, Jena, Germany
6. Institute for Biomedicine, Eurac Research, Affiliated Institute of the University of Lübeck, Bolzano, Italy
7. Structural and Computational Biology Unit, European Molecular Biology Laboratory, Heidelberg, Germany
8. Center for Newborn Screening, Department of Congenital Disorders, Statens Serum Institut, Copenhagen, Denmark
9. RIKEN Center for Sustainable Resource Science, Yokohama, Kanagawa, Japan
10. RIKEN Center for Integrative Medical Sciences, Yokohama, Kanagawa, Japan
11. Applied Bioinformatics, Department of Computer Science, University of Tübingen, Tübingen, Germany
12. Institute for Translational Bioinformatics, University Hospital Tübingen, Tübingen, Germany
13. Department of Phytochemistry and Bioactive Natural Products, University of Geneva, Geneva, Switzerland
14. Bruker Daltonics, Bremen, Germany

15. Equipe PNAS, UMR 8038 CiTCoM CNRS, Faculté de Pharmacie de Paris, Université Paris Descartes, Paris, France
16. Department of Physics and Chemistry, School of Pharmaceutical Sciences of Ribeirão Preto, University of São Paulo, Ribeirão Preto, Brazil
17. Technische Universität Berlin, Faculty II Mathematics and Natural Sciences, Institute of Chemistry, Berlin, Germany
18. School of Chemistry and Biochemistry, Center for Microbial Dynamics and Infection, Georgia Institute of Technology, Atlanta, GA, USA
19. Center for Algorithmic Biotechnology, Institute of Translational Biomedicine, St. Petersburg State University, St. Petersburg, Russia
20. Waters Corporation, Milford, MA, USA
21. Institute of Microbiology of the Czech Academy of Sciences, Prague, Czech Republic
22. College of Pharmacy, Sookmyung Women's University, Seoul, Republic of Korea
23. Univ. Grenoble Alpes, CNRS, Grenoble INP, CHU Grenoble Alpes, TIMC-IMAG, Grenoble, France
24. Centro de Biodiversidad y Descubrimiento de Drogas, INDICASAT AIP, Panama, Republic of Panama
25. Department of Chemistry and Biochemistry, Department of Microbiology and Plant Biology and Laboratories of Molecular Anthropology and Microbiome Research, University of Oklahoma, USA
26. Nonlinear Dynamics, Milford, MA, USA
27. Computational Biology Department, School of Computer Sciences, Carnegie Mellon University, Pittsburgh, Pennsylvania, USA
28. Department of Biological and Environmental Sciences, University of West Alabama, Livingston, USA
29. Department of Pediatrics, University of California San Diego, La Jolla, San Diego, CA, USA
30. Bioinformatics and Scientific Data, Leibniz Institute of Plant Biochemistry, Halle, Germany
31. German Centre for Integrative Biodiversity Research (iDiv) Halle-Jena-Leipzig, Germany
32. Laboratoire de Chimie des Produits Naturels, UMR CNRS SPE, Université de Corse Pascal Paoli, France
33. Skaggs School of Pharmacy and Pharmaceutical Sciences, University of Colorado, Denver, Aurora, CO, USA
34. Whitehead Institute for Biomedical Research, Cambridge, MA, USA
35. Department of Biochemistry and Molecular Biology, Michigan State University, East Lansing, 48823, MI, USA
36. School of Computing Science, University of Glasgow, Glasgow G12 8QQ, UK
37. Division of Biological Sciences, University of California San Diego, La Jolla, CA, USA
38. Bioinformatics Group, Wageningen University, Wageningen, the Netherlands
39. Center for Microbiome Innovation, University of California, San Diego, La Jolla, CA, USA
40. Research Unit Analytical BioGeoChemistry, Helmholtz Zentrum München
41. College of Pharmacy, Kangwon National University, Republic of Korea

42. Institute for Bioinformatics and Medical Informatics, University of Tübingen, Tübingen, Germany
43. Biomolecular Interactions, Max Planck Institute for Developmental Biology, Tübingen, Germany
44. Department of Computer Science and Engineering, University of California San Diego, CA, USA

Abstract

Molecular networking has become a key method used to visualize and annotate the chemical space in non-targeted mass spectrometry-based experiments. However, distinguishing isomeric compounds and quantitative interpretation are currently limited. Therefore, we created Feature-based Molecular Networking (FBMN) as a new analysis method in the Global Natural Products Social Molecular Networking (GNPS) infrastructure. FBMN leverages feature detection and alignment tools to enhance quantitative analyses and isomer distinction, including from ion-mobility spectrometry experiments, in molecular networks.

Main text

Introduced in 2012¹, molecular networking has become an essential bioinformatics tool to visualize and annotate non-targeted mass spectrometry data^{2,3}. The first application of molecular networking was described by Traxler and Kolter⁴ as holding “*great promise in providing the next quantum leap in understanding the fascinating world of microbial chemical ecology*”. Molecular networking goes beyond spectral matching against reference spectra, by aligning experimental spectra against one another and connecting related molecules by their spectral similarity⁵. In a molecular network, related molecules are referred to as a “molecular family”, differing by simple transformations such as glycosylation, alkylation, and oxidation/reduction. Molecular networking became publicly accessible in 2013 through the initial release of the Global Natural Product Social Molecular Networking (GNPS), a web-enabled mass spectrometry knowledge capture and analysis platform (<http://gnps.ucsd.edu>)⁶, and has been widely applied in mass spectrometry-based metabolomics to aid in the annotation of molecular families from their fragmentation spectra (MS²).

Powered by 3,000+ CPU cores at the Center for Computational Mass Spectrometry at the University of California San Diego and the MassIVE data repository, GNPS has provided researchers from more than 150 countries with the ability to perform molecular networking. To build upon the success of the first molecular networking method (referred to as “classical” molecular networking, classical MN) which is based on the MS-Cluster algorithm⁷, we introduce a complementary tool named Feature-based Molecular Networking (FBMN). FBMN accepts the outputs of well-established mass spectrometry processing software and improves upon classical MN by incorporating MS¹ information, such as isotope patterns and retention time, but also ion-mobility separation when performed. As a result, molecular networks obtained with FBMN can distinguish isomers that may have remained hidden, facilitates spectral annotation, and incorporates relative quantitative information which enables robust downstream metabolomics statistical analysis. Whereas users of the classical molecular networking would have had to perform molecular networking and MS¹ analysis separately before performing a cumbersome linking of the outputs, a key advantage of FBMN is that the analysis is fully integrated throughout the analysis pipeline.

To fully utilize the MS¹ and MS² content collected during a non-targeted liquid chromatography coupled to tandem mass spectrometry data (LC-MS²) metabolomics experiment in a streamlined fashion, we have created an online infrastructure to support the outputs of feature detection and alignment tools for FBMN analysis (<https://ccms-ucsd.github.io/GNPSDocumentation/featurebasedmolecularnetworking>), including the standard output format for small molecules analysis (mzTab-M)⁸ (Fig. 1a). The diversity of supported software, each offering different functionalities/modules, serves experimentalists, bioinformaticians, and software developers. FBMN is already the second most utilized analysis tool within the GNPS environment (Fig. 1b) with more than 600 jobs performed in August 2019 and has already been used in more than 80 publications using FBMN during its development since Nov 2017. The molecular networks generated with FBMN enable the efficient visualization and annotation of isomers in LC-MS² datasets, as demonstrated below with LC-MS² data from a drug discovery project from *Euphorbia* plant extract⁹ (Fig. 2a-b), and the detection of human microbiome-derived lipids, belonging to the commendamide family¹⁰, detected in fecal samples from the American Gut Project¹¹ (a

crowd-sourced citizen science microbiome project) (Fig. 2c-d). In both cases, FBMN resolved positional isomers in the molecular networks that have similar MS² spectra but distinct retention times, that would not have been resolved with classical MN. In the study of metabolites produced by *Euphorbia* plants, the annotation of isomers in the FBMN facilitated the subsequent isolation of antiviral compounds¹². With samples from the American Gut Project, FBMN enabled the annotation of commensal isomers, including a putative novel derivative¹¹.

By incorporating chromatographic information, FBMN reduced the complexity of molecular networking analysis. In non-targeted LC-MS² data acquisition, the same precursor ion can be fragmented multiple times during chromatographic elution, which ultimately leads to multiple nodes representing the same compound in classical MN. Additionally, coeluting isobaric ions are often isolated and fragmented together leading to the generation of chimeric spectra which result in different MS² spectra for one precursor ion. With FBMN, the integration of feature detection with the alignment of the mass spectrometry signal discerns that these different MS² spectra are related to the same precursor molecule and selects a singular representative consensus spectrum for the feature. The benefit of using FBMN in such a case can be illustrated with the metal chelating agent ethylenediaminetetraacetic acid (EDTA) observed in the LC-MS² analysis of plasma samples (Fig 2e), in which it is used as an anticoagulant agent. Classical MN resulted in 13 duplicated nodes with identical precursor *m/z* values in one molecular family, ten of which have spectral library matches to EDTA reference MS² data (Fig. 2e and f). On the contrary, FBMN displays a unique representative MS² spectrum that matches EDTA spectra in the library, because the multiple MS² spectra detected were part of a single feature in the chromatographic dimension. The reduction of redundancy within the resulting molecular network simplifies the discovery of structurally related compounds.

While classical MN uses the spectral count or the sum precursor ion count, FBMN uses the LC-MS feature abundance (peak area or peak height), resulting in a more accurate estimation of the relative ion intensity. The method of FBMN simplifies, organizes the data, and adds relative quantitative information and precursor isotope patterns. FBMN enables robust statistical analysis by providing relative ion intensities across a dataset. This capacity is demonstrated with a serial dilution series dataset of the NIST1950 serum reference standard¹³, containing 150 spiked standards. Here, the LC-MS² were processed with MZmine¹⁴ or OpenMS¹⁵ for FBMN (Fig 2g-h). A linear regression analysis was used to evaluate the relative quantification between classical MN and FBMN. Figure 2h shows that for FBMN, relative quantification has a correlation coefficient (*r*) value distribution mostly above 0.7, while this was not the case when the precursor ion abundance was obtained from classical MN via spectral counts (Fig 2g). The improved distribution of correlation coefficients towards 1 indicates a more linear response between concentration and ion abundance, which improves the accuracy and precision of quantification results. FBMN facilitates the direct application of existing statistical, visualization, and annotation tools, such as QIIME2¹⁶, MetaboAnalyst¹⁷, ili¹⁸, NAP¹⁹, MS2LDA²⁰, MolNetEnhancer²¹, and SIRIUS²².

FBMN further enables the creation of molecular networks from ion mobility spectrometry experiments coupled with LC-MS² analysis. As an orthogonal separation method, the use of ion mobility offers additional resolving power to differentiate isomeric ions in the molecular network. The integration of ion mobility with FBMN on GNPS can currently be performed with MetaboScape, MS-DIAL²³, and Progenesis QI. An example of such isomer separation using trapped ion mobility spectrometry (TIMS) coupled to LC-MS² is shown in Supplementary Fig. 1.

Available on the GNPS web platform at <https://gnps.ucsd.edu>, FBMN is ideally suited for advanced molecular networking analysis, enabling the characterization of isomers, the incorporation of relative quantification, and the integration of ion mobility data. FBMN is the recommended way to analyse a single LC-MS² metabolomics study, but care must be taken when applied across multiple studies due to different experimental conditions and possible batch effects. Moreover, the use of FBMN for the analysis of very large datasets (containing several thousand samples) is limited by the scalability of most feature detection and alignment software tools. Thus, while FBMN offers an improvement upon many aspects of molecular networking analysis, classical MN remains essential for repository-scale meta-analysis large dataset processing, and is convenient for rapid analysis of LC-MS² data with less user

defined parameters: one important aspect of molecular networks obtained with FBMN is the use of adequate processing steps and parameters, which otherwise could negatively impact the resulting molecular networks. To facilitate dissemination, education of the FBMN method, and the supported processing software, we created detailed tutorials and step-by-step instructions, available at <https://ccms-ucsd.github.io/GNPSDocumentation/featurebasedmolecularnetworking>.

The FBMN workflow offers not only automated spectral library search and spectral entry curation, but is also integrated with other annotation tools available on GNPS environment, such as MASST²⁴, while promoting data analysis reproducibility by saving the FBMN jobs on the user's private online workspace. The GNPS environment conveniently enables the user to evaluate different parameters and enables the sharing of the results via a web URL for publication.

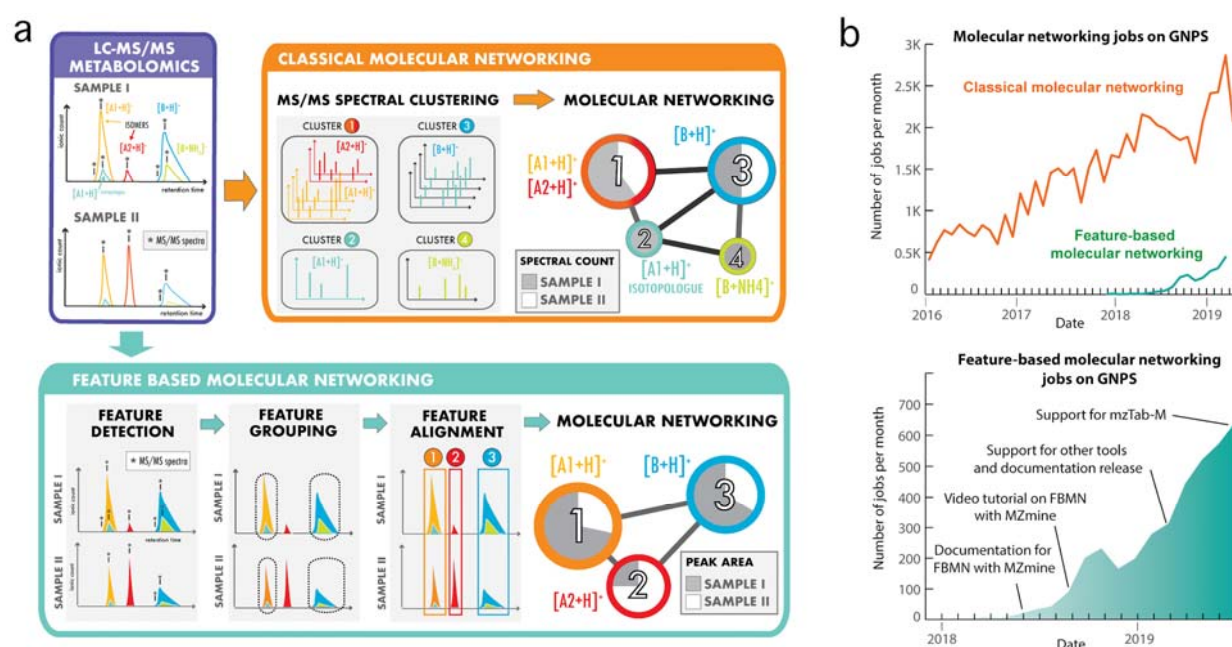


Fig. 1: Methods for the generation of molecular networks from non-targeted mass spectrometry data with the GNPS web platform. a) Two methods exist for the generation of molecular networks on the GNPS web platform: classical MN and feature-based molecular networking (FBMN). For both methods, mass spectrometry data files have to be converted to the mzML format using tools such as Proteowizard MSConvert²⁵. The classical MN method runs entirely on the GNPS platform. In that method, MS² spectra are clustered with MS-Cluster and the consensus MS² spectra obtained are used for classical MN generation. In the case of FBMN, a feature detection and alignment tool is used to first process the LC-MS² data (such as MZmine, MS-DIAL, XCMS, OpenMS, Progenesis QI, or MetaboScape) instead of using MS-Cluster (classical MN). Results are then exported and uploaded to the GNPS web platform for molecular networking analysis. **b)** Graphs showing the number of molecular networking jobs performed on GNPS. The upper graph shows the number of classical MN and FBMN jobs since 2016. The lower graph shows the number of FBMN jobs since its introduction in 2017 and key events accelerating its use.

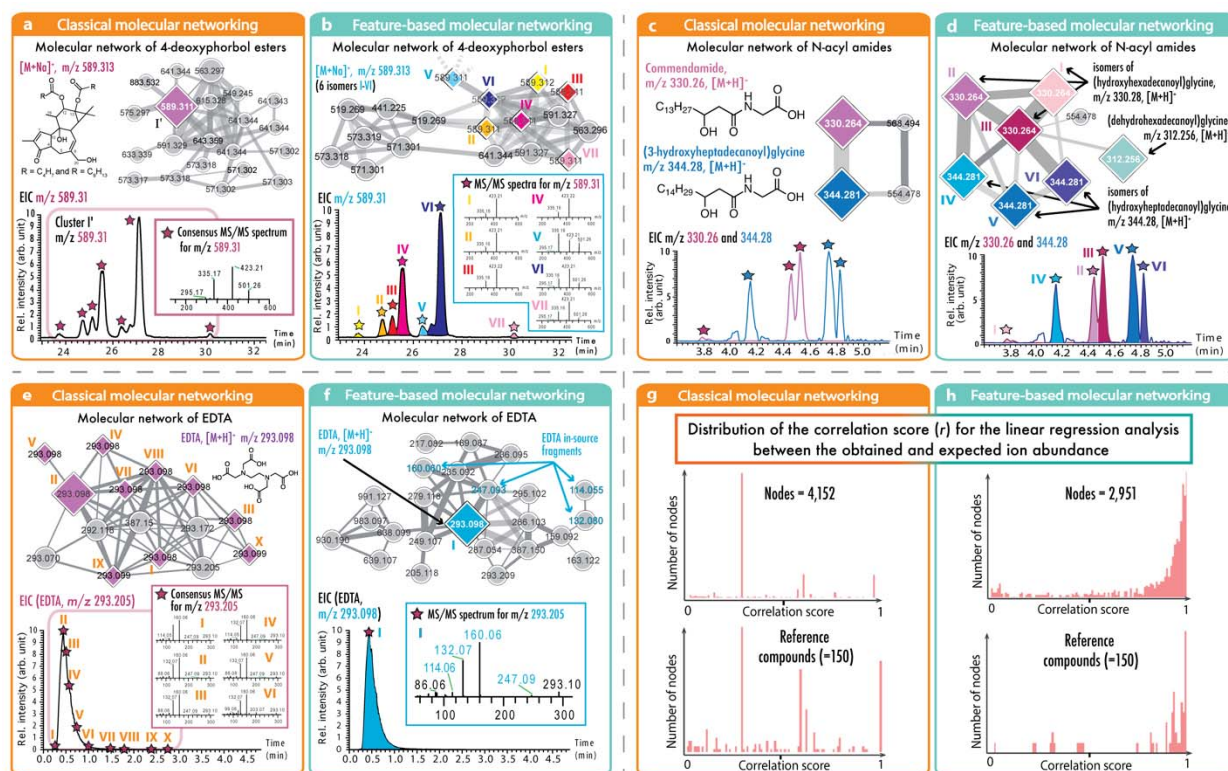


Fig. 2: Comparisons of classical MN and feature-based molecular networking. In these examples, the node size corresponds to the spectral count in classical MN (orange boxes, left) or to the sum of LC-MS peak area in FBMN (blue boxes, right). Panel (a) displays the results from classical MN with the LC-MS² data of *Euphorbia dendroides* plant samples; classical MN resulted in one node for the ion at *m/z* 589.313, while (b) FBMN performed after MZmine processing was able to detect seven isomers of this ion. Classical MN in the data of a cohort from the American Gut Project (c) showed two different *N*-acyl amides while the use of FBMN (d) processed with MZmine allowed the annotation of three different isomers per *N*-acyl amides. Classical MN (e) and FBMN (f) performed with OpenMS, were used to analyse the network of EDTA in plasma (373 samples) by compressing MS² spectra of EDTA eluting over 2.5 min into one best-quality MS² spectrum. FBMN recovered the molecular similarity of in-source fragments observed for EDTA, which were not displayed with classical MN, due to the fixed top-K rank for connected nodes (typically set to 10) of MS² spectral similarity. Evaluation of quantitative performance using a serial dilution of serum reference sample (NIST1950SRM) analyzed with (g) classical MN and (h) FBMN. The plots are showing the correlation score (*r*) distribution between the observed and expected relative ion abundance. The upper charts present the distribution of the correlation score for all the nodes (features) generated, and the bottom charts show the distribution for 150 reference compounds. While classical MN uses the spectral count or the sum precursor ion count to estimate the molecular network node abundance, FBMN uses the LC-MS feature abundance (peak area or peak height), resulting in a more accurate estimation of the relative ion intensity.

Methods

Development of Feature-based Molecular Networking (FBMN)

The FBMN method consists of two main steps: 1) LC-MS feature detection and alignment, then 2) a dedicated molecular networking workflow on GNPS. Our first prototype for FBMN was developed with the Optimus workflow^{12,18} that uses OpenMS tools¹⁵ and the KNIME Analytics²⁶ platform. Following step 1 (feature detection and alignment), two files are exported: a *feature quantification table* (.TXT format)

and a *MS² spectral summary* (.MGF format). The feature quantification table contains information about LC-MS features across all considered samples including a unique identifier (feature ID) for each feature, *m/z* value, retention time, and intensity. The *MS² spectral summary* contains a list of *MS²* spectra, with one representative *MS²* spectrum per feature. The mapping information between the feature quantification table and the *MS² spectral summary* is stored in these files using the feature ID and scan number, respectively. This simple mapping enables to relate LC-MS feature information or statistically derived results to the molecular network nodes. This approach was also used for the integration of other tools with FBMN, and does not require third party software like it was proposed in the past^{27,28}. Finally, the FBMN workflow also supports the mzTab-M format⁸, a standardized output format designed for the report of metabolomics MS-data processing results. In this case, the mzTab-M file is used instead of *feature quantification table* and requires the input of the mzML files instead of the *MS² spectral summary* file. Support for the mzTab-M format enables the possibility to perform FBMN with any existing and future processing tools that support this standardized format.

The FBMN workflow has been integrated into the GNPS ecosystem and thus benefits from the connection with other GNPS features, e.g. the possibility to perform automatic *MS²* spectral library search, the direct addition and curation of library entries, the search of a spectrum against public datasets with MASST²⁴, and the visualization of molecular networks directly in the web browser²⁹ or with Cytoscape³⁰. The FBMN workflow is available on the GNPS platform (<https://gnps.ucsd.edu/>) via a web interface (See Supplementary Fig. 2). Jobs are computed and stored on the computational infrastructure of the Center for Computational Mass Spectrometry at the University of California San Diego. Each finished job is saved in the private user space for future examination and has a permanent static link that enables data sharing and collaborative analyses. We strongly recommend the sharing of this static link along with publications using GNPS workflows to facilitate results accessibility and data analysis reproducibility. Instructions to perform FBMN with the supported tools are provided in the GNPS documentation (<https://ccms-ucsd.github.io/GNPSDocumentation/featurebasedmolecularnetworking> and Supplementary Fig. 3).

FBMN with MZmine

MZmine¹⁴ is a popular open-source cross-platform software for mass spectrometry data processing with an advanced Graphical User Interface (GUI) that enables the users to visually optimize parameters and examine the results of each processing step. Moreover, MZmine allows for the export of a batch file containing all the steps and parameters used in the processing, thus enabling its reproducibility. To support FBMN in MZmine, the feature detection step (peak “Deconvolution module”) was modified to provide the ability to pair a feature with its *MS²* scans using an *m/z* and retention time range defined by the user (Supplementary Fig. 4). Due to a new data structure and to support older projects (created with release < 2.38), an additional specific filtering module (*Group MS² scans with features*) was developed to assign all *MS²* scans to the features of existing peak list (see this video for instructions: <https://www.youtube.com/watch?v=EL5pmFvpTfE>). Moreover, a GNPS export and direct submission module was created (Supplementary Fig. 5) which offers two modes: 1) Export of the *feature quantification table* and the *MS² spectral summary* file and 2) Direct FBMN analysis on the GNPS web platform (release 2.37+). The direct GNPS job submission generates all the files and uploads them together with an optional metadata table and default parameters (Supplementary Fig. 6) to the FBMN workflow on GNPS. By providing the user’s GNPS login credentials (optional), a new job can be created in the personal user space (https://www.youtube.com/watch?v=vFcGG7T_44E&list=PL4L2Xw5k8ITzd9hx5XIP94vFPxj1sSafB&index=4&t=0s). Otherwise, the user can be notified by email or directly redirected to the job webpage after the submission. With the option “most intense”, the GNPS Export uses the most intense *MS²* spectrum as a representative spectrum for each LC-MS² feature. When using the “merge MS/MS” spectra option (release 2.40+), a representative high quality *MS²* spectrum is instead generated from all spectra and exported as a representative spectrum (Supplementary Note 1). The detailed documentation is

available at <https://ccms-ucsd.github.io/GNPSDocumentation/featurebasedmolecularnetworking-with-mzmine2/>.

FBMN with OpenMS

OpenMS is an open-source cross-platform software specifically designed for the flexible and reproducible analysis of high-throughput MS data analysis, including more than 200 tools for common mass spectrometric data processing tasks¹⁵. Building on our experience with the Optimus development, the integration of OpenMS and FBMN was achieved by creating a *GNPSExport* tool (TOPP tool) as a part of the OpenMS tool collection (<https://github.com/Bioinformatic-squad-DorresteinLab/OpenMS>). A detailed description of the *GNPSExport* module and how to use it for FBMN is available at the following webpage <https://ccms-ucsd.github.io/GNPSDocumentation/featurebasedmolecularnetworking-with-openms/>. In brief, after running an OpenMS non-targeted metabolomics pipeline, the *GNPSExport* TOPP tool can be applied to the consensusXML file resulting from *FeatureLinkerUnlabeledKD* or *FeatureLinkerUnlabeledQT* tools (alignment step), and the corresponding mzML files. For each consensusElement (LC-MS² feature) in the consensusXML file, the *GNPSExport* generates one representative consensus MS² spectrum that will be exported in the *MS² spectral summary* file (using either the option “most intense” or “merged spectra”, see Supplementary Note 1). The *TextExport* tool is applied to the same consensusXML file to generate the *feature quantification table*. Note that the *GNPSExport* requires the use of the *IDMapper* tool on the featureXML files (from the feature detection step) prior to feature linking, in order to associate MS² scans [peptide annotation in OpenMS terminology] with each feature. These MS² scans are used by the *GNPSExport* for the generation of the representative MS² spectrum. Additionally, the *FileFilter* has to be run on the consensusXML file, prior to the *GNPSExport*, in order to remove consensus Elements without associated MS² scans. The two files exported (*feature quantification table* and *MS² spectral summary*) can be directly used for FBMN analysis on GNPS. The OpenMS-GNPS workflow for metabolomics data processing was implemented as a python wrapper around OpenMS TOPP tools (<https://github.com/Bioinformatic-squad-DorresteinLab/openms-gnps-tools>), and released as a workflow (<https://github.com/Bioinformatic-squad-DorresteinLab/openms-gnps-workflow>) on the GNPS/MassIVE web platform³¹. OpenMS version 2.4.0 was used¹⁵. The OpenMS + GNPS workflow can be accessed and run here: <https://proteomics2.ucsd.edu/ProteoSAFe/>.

FBMN with XCMS

The XCMS package (<https://github.com/sneumann/xcms> for the most recent version) is one of the most widely used software for processing of mass spectrometry-based metabolomics data³². The integration of XCMS and FBMN is currently possible using a custom utility function “formatSpectraForGNPS” creating the *MS² spectral summary*. This function is available on the following GitHub repository <https://github.com/jorainer/xcms-gnps-tools> and is compatible with the CAMERA algorithm for isotopes and adduct annotation³³. Representative XCMS R scripts in markdown and Jupyter notebook formats are available in the following GitHub repository https://github.com/DorresteinLaboratory/XCMS3_FeatureBasedMN. The two exported files (*feature quantification table* and *MS² spectral summary*) can be directly used for FBMN analysis on GNPS. The detailed documentation is available at <https://ccms-ucsd.github.io/GNPSDocumentation/featurebasedmolecularnetworking-with-xcms3/>.

FBMN with MS-DIAL

MS-DIAL is an open-source mass spectrometry data processing software²³ (available for Windows only, http://prime.psc.riken.jp/Metabolomics_Software/MS-DIAL/). The integration of MS-DIAL and FBMN was made possible since ver. 2.68 by exporting the “Alignment results” using the “GNPS export” option. In addition to LC-MS² data processing, MS-DIAL can process data from SWATH-MS² (data-independent LC-MS² acquisition), and ion mobility spectrometry coupled to LC-MS². The two files exported (*feature quantification table* and *MS² spectral summary*) can be directly used for FBMN analysis on GNPS. A

video tutorial on the use of MS-DIAL for FBMN is available at <https://www.youtube.com/watch?v=hxk40jwAkcc&t=7s>. The detailed documentation is available at <https://ccms-ucsd.github.io/GNPSDocumentation/featurebasedmolecularnetworking-with-ms-dial/>.

FBMN with MetaboScape

MetaboScape is a proprietary mass spectrometry metabolomics data processing software commercialized by Bruker and available on Windows. MetaboScape can perform feature detection, alignment and annotation of non-targeted LC-MS² data acquired on Bruker mass spectrometers. Support for the processing of trapped ion mobility spectrometry (TIMS) coupled to non-targeted LC-MS² (LC-TIMS-MS²) was added in MetaboScape 4.0, which results in LC-TIMS-MS features. Feature-based molecular networking can be performed on LC-MS² or LC-TIMS-MS² data by exporting the *feature quantification table* and *MS² spectral summary* from the “bucket table” using the “Export to GNPS format” function. These files can be uploaded to GNPS for FBMN analysis. Information from MetaboScape, such as the Collision Cross Section values, or other spectral annotations can be mapped into the molecular networks using Cytoscape³⁰. The detailed documentation is available at <https://ccms-ucsd.github.io/GNPSDocumentation/featurebasedmolecularnetworking-with-metaboscape/>.

FBMN with Progenesis QI

Progenesis QI is a proprietary feature detection and alignment software developed by Nonlinear Dynamics (Waters) that is compatible with various proprietary and open mass spectrometry data formats. Progenesis QI can perform feature detection, alignment and annotation of non-targeted LC-MS² data acquired either in data-dependent acquisition (DDA) or data independent analysis (DIA, such as MS^E), and can also utilize the ion mobility spectrometry (IMS) dimension. FBMN can be performed on any of these data types processed with Progenesis QI (ver 4.0), by exporting the *feature quantification table* (.CSV format) and the *MS² spectral summary* (.MSP format). These two files can be exported from the “Identify Compounds” submenu by using the function “Export compound measurement” and “Export fragment database”, respectively. These files can be uploaded to GNPS for FBMN analysis. Information from Progenesis QI, such as the Collision Cross Section values, or other spectral annotations can be mapped into the molecular networks using Cytoscape³⁰. The detailed documentation is available at <https://ccms-ucsd.github.io/GNPSDocumentation/featurebasedmolecularnetworking-with-progenesisqi/>.

FBMN makes it possible to resolve isomers in a drug lead discovery effort

The examination of the LC-MS² data ([MSV000080502](#)) from the *Euphorbia dendroides* plant extract showed the presence of numerous chromatographic peaks for ions in the range *m/z* 500-900, corresponding to diterpene ester derivatives. These specialized metabolites consist of a polyhydroxylated diterpene core acylated with various acidic moieties, that are typically found as positional isomers based on their acylation pattern³⁴. The extracted ion chromatogram (EIC) for the ion *m/z* 589.31 in the *Euphorbia dendroides* extract data (Supplementary Fig. 7) shows the presence of at least seven distinct LC-MS peaks between 24.5 and 27.3 min, including five peaks with an associated MS² spectra. The analysis of the extract and the fractions where these molecules were originally isolated (fractions 13 and 14) with [classical MN](#) resulted in a [molecular network](#) with two nodes for the *m/z* 589.31 ions (Fig. 2a and Supplementary Fig. 8). These MS² spectra (cluster index [5352](#) and [5354](#)) resulted from merging 96 fragmentation spectra spanning from 23.6 to 26.5 min by MS-Cluster (Fig. 2b and Supplementary Fig. 9). Close examination of the clustered spectra revealed that while all MS² spectra for the precursor *m/z* 589.31 present fragment ions *m/z* 501.26, 423.21, 335.16, and 295.17, three distinct spectral types could be established based on the ions relative intensities (Supplementary Fig. 10). FBMN of the dataset with MZmine processing ([see the GNPS job](#)) enabled the differentiation of the MS² spectra of seven isomers (Figure 2b and Supplementary Fig. 11 for the [molecular network view](#)). A detailed discussion on the differences observed between the two methods can be found in the Supporting Information (Supplementary Note 2 and Supplementary Table 1). Interestingly, in the original study¹² OpenMS was used for FBMN and resulted in the observation of three different positional isomers instead of seven,

which shows that different processing methods can lead to different results with FBMN. These three isomers were subsequently isolated and differed by the position of one double bond on the C-12 acyl chain, or from carbon C-4 configuration¹². Because FBMN connects the accurate relative abundance of the ions across the fractions and the molecular networks, it allowed to create bioactivity-based molecular networks¹², which were used to predict and target potentially antiviral compounds. For detailed description of the extraction, mass spectrometry analysis, and structural elucidation, see the original manuscript¹². The MZmine project and parameters used can be accessed on the MassIVE submission ([MSV000080502](https://massive.ucsd.edu/MSV000080502)).

FBMN resolves isomers in large scale metabolomics studies

FBMN was applied on a cohort of the American Gut Project (AGP), a citizen-scientist research project that enabled the observation of the commensamide in humans, along with other new *N*-acyl amide derivatives using molecular networking¹¹. Commensamide is a recently discovered bacterial *N*-acyl amide that was shown to modulate host metabolism via G-protein-coupled receptors (GPCRs) in the murine intestinal tract³⁵.

The use of FBMN for the AGP data (Figure 2d) made possible to observe the presence of two additional commensamide isomers (*m/z* 330.26) and of an analogue (hydroxyheptadecanoyl)glycine (*m/z* 344.28), while classical MN resulted in the observation of one single consensus spectrum for each compound (Figure 2c). In addition, FBMN allowed to observe a putative commensamide derivative (dehydrohexadecanoyl)glycine ([CCMSLIB00005436498](https://massive.ucsd.edu/MSV00005436498) and Supplementary Fig. 12) in the commensamide molecular network. The sample collection and mass spectrometry acquisition methods are described in the original manuscript¹¹. The data were downloaded from MassIVE ([MSV000080186](https://massive.ucsd.edu/MSV000080186)) and processed with MZmine (2.37). The MZmine project along with parameters and export files were deposited to the MassIVE repository ([MSV000084095](https://massive.ucsd.edu/MSV000084095)). The chromatograms for *m/z* 330.26 and *m/z* 344.28 displayed in Figure 2c-d are from samples 43076_P3_RB9_01_314.mzML and 38131_P5_RA4_01_538.mzML, respectively. Chromatograms were exported with MZmine. The results were exported with the “Export for/Submit to GNPS” module for FBMN analysis on GNPS. The corresponding job can be accessed here:

<https://gnps.ucsd.edu/ProteoSAFe/status.jsp?task=0a8432b5891a48d7ad8459ba4a89969f> (only logged users can see all the input files). The mzML files were used for the classical MN job can be accessed here: <https://gnps.ucsd.edu/ProteoSAFe/status.jsp?task=3c27e43d908c4044bace405cc394cd25>.

FBMN reduces spectral redundancy and deobfuscates spectral similarity relationships: the case of EDTA

The benefit of using FBMN can be illustrated with the metal chelating agent ethylenediaminetetraacetic acid (EDTA), widely used in beauty products, food, and scientific protocols. A search for its occurrences in public spectral datasets with the mass spectrometry search tool (MASST)²⁴ showed that it is frequently observed in plasma samples where it is used during the sample preparation. We took one of the public human serum sample datasets ([MSV00008263](https://massive.ucsd.edu/MSV00008263)) where EDTA was observed. For a detailed description of the protocol and mass spectrometry parameters, see Supplementary Note 3. The analysis of the data with classical MN showed that the EDTA ions are found in two molecular networks. One network consists of $[M+H]^+$ spectra and the other of $[M+Na]^+$ spectra. Interestingly, each of these networks have one node with a large number of clustered spectra (node 91205 for 4655 spectra, and node 116470 for 571 spectra, respectively), but yet EDTA ions are represented by multiple nodes although these nodes have the same precursor ion mass and retention time. Detailed analysis showed that while the median pairwise cosine values between EDTA spectra are high (median value of 0.93 and 0.94), the spectra are not clustering into a single node. Examination of the multiple fragmentation spectra for EDTA ions showed that some 1) are chimeric spectra “contaminated” by fragment ions produced by co-eluting isobaric ions, and 2) that other spectra were dominated by low intensity fragment ions resulting from MS² spectra acquired at low intensity. The method of FBMN was applied on that same dataset using the OpenMS-GNPS workflow ([see the job](#)), and the results showed that it efficiently reduces the appearance of these redundant node

patterns from the same molecule (see the FBMN job, Figure 2f), both for the molecular networks containing the $[M+H]^+$ and $[M+Na]^+$ spectra. FBMN recovers the molecular similarity of in-source fragments observed for EDTA, which were not displayed with classical MN, as they now fall within the top-K rank (typically set to 10) of MS^2 spectral similarity considered in the network topology. The parameters used for OpenMS tools can be accessed in the OpenMS-GNPS job (see the job). OpenMS ver. 2.4.0 was used¹⁵.

FBMN enables the use of relative quantification in the molecular networks

While classical MN uses the spectral count or the sum of precursor ion intensity to estimate the ion abundance, FBMN uses the accurate ion intensities obtained from LC-MS feature detection. The FBMN method brings in ion abundance across all samples by using the value of the chromatographic peak area or peak height as determined by the LC-MS feature detection and alignment software. Using a serial dilution of the NIST 1950 serum reference metabolome sample¹³ analyzed on an Orbitrap mass spectrometer (Q Exactive, ThermoFisher) and processed with OpenMS or MZmine, we show the linearity of the relative quantification with FBMN and the improvement compared to classical MN (Figure 2h). The sample preparation and mass spectrometry methods are described in Supplementary Note 4. The files along with the parameters for MZmine are available on the following MassIVE repository ([MSV000084092](https://massive.ucsd.edu/ProteoSAFe/status.jsp?task=MSV000084092)). The linear regression analysis was performed with python 2 (ver. 2.7.15) with the *LinearRegression* function of the *sklearn* package (ver. 0.20.1)³⁶. The parameters used for OpenMS can be obtained from the following job link:

<https://proteomics2.ucsd.edu/ProteoSAFe/status.jsp?task=aae71e9b72cf431d9b2606170c3f7a7d>. The molecular networking jobs can be accessed here: classical MN (<https://gnps.ucsd.edu/ProteoSAFe/status.jsp?task=daf3f0d7cec94104b2c9001739964c31>), MZmine processing (<https://gnps.ucsd.edu/ProteoSAFe/status.jsp?task=f443cad083be4979aedd2af0f97b9fe9>) and OpenMS processing (<https://gnps.ucsd.edu/ProteoSAFe/status.jsp?task=2c48a477ec094123987cdf90db4be8e4>).

FBMN enables molecular networking with ion mobility spectrometry

The sample NIST 1950 serum¹³ was analyzed using a timsTOF Pro (Bruker Daltonics, Bremen) in data-dependent acquisition mode using PASEF (Parallel Accumulation-Serial Fragmentation)³⁷. The data were then processed with MetaboScape (ver. 5.0) and the results were exported for FBMN analysis on GNPS. The mass spectrometry acquisition method, data, and parameters used for the processing were deposited on MassIVE ([MSV000084402](https://massive.ucsd.edu/ProteoSAFe/status.jsp?task=MSV000084402)). Classical MN were annotated with the GNPS⁶, NIST17 and LipidBlast³⁸ spectral libraries

<https://gnps.ucsd.edu/ProteoSAFe/status.jsp?task=f2adc2cf33c646548798d0e285197a96>). Lipid annotation in MetaboScape was performed using SimLipid (ver. 6.04, Premier Biosoft, Palo Alto) and mapped to the FBMN (<https://gnps.ucsd.edu/ProteoSAFe/status.jsp?task=0d89db67b0974939a91cb7d5bfe87072>). The molecular networks were visualized with Cytoscape ver. 3.7.1³⁰, and the results are presented in the Supplementary Information (Fig. S1). Classical MN were annotated with the GNPS⁶, NIST17 and LipidBlast³⁸ spectral libraries (<https://gnps.ucsd.edu/ProteoSAFe/status.jsp?task=f2adc2cf33c646548798d0e285197a96>). FBMN were annotated by mapping annotations from the MetaboScape annotation engine (<https://gnps.ucsd.edu/ProteoSAFe/status.jsp?task=0d89db67b0974939a91cb7d5bfe87072>).

Integration with other computational mass spectrometry annotation tools

The MGF file format is accepted by numerous computational mass spectrometry annotation tools. The use of these tools with the MS^2 spectral summary file enables subsequent direct mapping of these annotations to the molecular networks produced by the feature-based molecular networking method.

These tools include SIRIUS²², DEREPLICATOR,^{39,40} NAP,¹⁹ MS2LDA²⁰, MolNetEnhancer²¹ (see Supplementary Note 5), as well as other software such as MetWork⁴¹, CFM-ID⁴², MetGem⁴³, MetFrag⁴⁴.

Large dataset processing with OpenMS and XCMS

The processing of large metabolomics datasets (more than a thousand samples) is limited by the scalability of existing LC-MS feature detection tools, especially those based on a GUI (such as MZmine and MS-DIAL). We showed that with specific peak picking parameters the use of XCMS or OpenMS enables using FBMN for large metabolomics study ([MSV000080030](https://doi.org/10.1101/812404), approximately 2,000 samples). See the Supplementary Note 6, Supplementary Table 2, and Supplementary Fig. 13.

Code availability

The FBMN workflow is available as web-interface on the GNPS web platform (<https://gnps-quickstart.ucsd.edu/featurebasednetworking>). The workflow code is open source and available on GitHub (https://github.com/CCMS-UCSD/GNPS_Workflows/tree/master/feature-based-molecular-networking). It is released under the licence of The Regents of the University of California and free for non-profit research (https://github.com/CCMS-UCSD/GNPS_Workflows/blob/master/LICENSE). The workflow was written in Python (ver. 3.7) and deployed with the ProteoSAFE workflow manager employed by GNPS (<http://proteomics.ucsd.edu/Software/ProteoSAFE/>). We also provide documentation, support, example files, and additional information on the GNPS documentation website (<https://ccms-ucsd.github.io/GNPSDocumentation/featurebasedmolecularnetworking/>). The source code of the GNPSEXP module in MZmine is available at (<https://github.com/mzmine/mzmine2>) under the GNU General Public License. The source code of the GNPSEXP tool in OpenMS is available at (<https://github.com/Bioinformatic-squad-DorresteinLab/OpenMS>) under the BSD licence. The source code for the GNPSEXP custom function for XCMS is available at <https://github.com/jorainer/xcms-gnps-tools> under the GNU General Public License.

Data availability

The LC-MS² data for the *Euphorbia dendroides* dataset, along with the MZmine project and parameters used can be accessed on the MassIVE submission ([MSV000080502](https://massive.ucsd.edu/MSV000080502), Creative Commons CC0 1.0 Universal license). The classical MN and FBMN jobs can be accessed via the GNPS website at <https://gnps.ucsd.edu/ProteoSAFe/status.jsp?task=189e8bf16af145758b0a900f1c44ff4a> and <https://gnps.ucsd.edu/ProteoSAFe/status.jsp?task=672d0a5372384cff8c47297c2048d789>, respectively. The LC-MS² data for the American Gut Project (AGP) were downloaded from MassIVE ([MSV000080186](https://massive.ucsd.edu/MSV000080186) Creative Commons CC0 1.0 Universal license) and processed with MZmine (2.37). The MZmine project along with parameters and export files were deposited ([MSV000084095](https://massive.ucsd.edu/MSV000084095), Creative Commons CC0 1.0 Universal license). The classical MN and FBMN jobs can be accessed at <https://gnps.ucsd.edu/ProteoSAFe/status.jsp?task=3c27e43d908c4044bace405cc394cd25> and <https://gnps.ucsd.edu/ProteoSAFe/status.jsp?task=0a8432b5891a48d7ad8459ba4a89969f>, respectively. The LC-MS² data for the EDTA case are available on the MassIVE submission ([MSV00008263](https://massive.ucsd.edu/MSV00008263), Creative Commons CC0 1.0 Universal license). The classical MN job can be accessed at <https://gnps.ucsd.edu/ProteoSAFe/status.jsp?task=fbac1a5061ba4ad683a284ef55d45df6>. The OpenMS and the FBMN job at <https://proteomics2.ucsd.edu/ProteoSAFe/status.jsp?task=83a0a417a49b4b76b61e9a8191a6ea2d> at <https://gnps.ucsd.edu/ProteoSAFe/status.jsp?task=8f40420c11694cf9ab06fdf7a5a4c53b>, respectively. The mass spectrometry acquisition method, data, and parameters used for the processing of the serum analysis with the timsTOF mass spectrometer were deposited ([MSV000084402](https://massive.ucsd.edu/MSV000084402)). Classical MN and FBMN jobs can be accessed here: <https://gnps.ucsd.edu/ProteoSAFe/status.jsp?task=f2adc2cf33c646548798d0e285197a96>, and <https://gnps.ucsd.edu/ProteoSAFe/status.jsp?task=0d89db67b0974939a91cb7d5bfe87072>, respectively.

References

1. Watrous, J. *et al.* Mass spectral molecular networking of living microbial colonies. *Proc. Natl. Acad. Sci.* **109**, E1743–52 (2012).
2. Quinn, R. A. *et al.* Molecular Networking As a Drug Discovery, Drug Metabolism, and Precision Medicine Strategy. *Trends Pharmacol. Sci.* **38**, 143–154 (2017).
3. Fox Ramos, A. E., Evanno, L., Poupon, E., Champy, P. & Beniddir, M. A. Natural products targeting strategies involving molecular networking: different manners, one goal. *Nat. Prod. Rep.* **36**, 960–980 (2019).
4. Traxler, M. F. & Kolter, R. A massively spectacular view of the chemical lives of microbes. *Proc. Natl. Acad. Sci. U. S. A.* **109**, 10128–10129 (2012).
5. Yang, J. Y. *et al.* Molecular networking as a dereplication strategy. *J. Nat. Prod.* **76**, 1686–1699 (2013).
6. Wang, M. *et al.* Sharing and community curation of mass spectrometry data with Global Natural Products Social Molecular Networking. *Nat. Biotechnol.* **34**, 828–837 (2016).
7. Frank, A. M. *et al.* Clustering Millions of Tandem Mass Spectra. *J. Proteome Res.* **7**, 113–122 (01/2008).
8. Hoffmann, N. *et al.* mzTab-M: A Data Standard for Sharing Quantitative Results in Mass Spectrometry Metabolomics. *Anal. Chem.* **91**, 3302–3310 (2019).
9. Esposito, M. *et al.* Euphorbia dendroides Latex as a Source of Jatrophane Esters: Isolation, Structural Analysis, Conformational Study, and Anti-CHIKV Activity. *J. Nat. Prod.* (octobre 27, 2016). doi:10.1021/acs.jnatprod.6b00644
10. Cohen, L. J. *et al.* Functional metagenomic discovery of bacterial effectors in the human microbiome and isolation of commendamide, a GPCR G2A/132 agonist. *Proc. Natl. Acad. Sci. U. S. A.* **112**, E4825–E4834 (2015).
11. McDonald, D. *et al.* American Gut: an Open Platform for Citizen Science Microbiome Research.

- 1 *mSystems* **3**, (2018).
- 2 12. Nothias, L.-F. *et al.* Bioactivity-Based Molecular Networking for the Discovery of Drug Leads in
3 Natural Product Bioassay-Guided Fractionation. *J. Nat. Prod.* **81**, 758–767 (2018).
- 4 13. Simón-Manso, Y. *et al.* Metabolite profiling of a NIST Standard Reference Material for human
5 plasma (SRM 1950): GC-MS, LC-MS, NMR, and clinical laboratory analyses, libraries, and web-
6 based resources. *Anal. Chem.* **85**, 11725–11731 (2013).
- 7 14. Pluskal, T., Castillo, S., Villar-Briones, A. & Oresic, M. MZmine 2: modular framework for
8 processing, visualizing, and analyzing mass spectrometry-based molecular profile data. *BMC*
9 *Bioinformatics* **11**, 395 (2010).
- 10 15. Röst, H. L. *et al.* OpenMS: a flexible open-source software platform for mass spectrometry data
11 analysis. *Nat. Methods* **13**, 741–748 (2016).
- 12 16. Bolyen, E. *et al.* Reproducible, interactive, scalable and extensible microbiome data science using
13 QIIME 2. *Nat. Biotechnol.* (2019). doi:10.1038/s41587-019-0209-9
- 14 17. Xia, J., Sinelnikov, I. V., Han, B. & Wishart, D. S. MetaboAnalyst 3.0—making metabolomics more
15 meaningful. *Nucleic Acids Res.* **43**, W251–W257 (2015).
- 16 18. Protsyuk, I., Melnik, A. V., Nothias, L. F. & Rappez, L. 3D molecular cartography using LC–MS
17 facilitated by Optimus and 'ili software. *Nat. Protoc.* (2018).
- 18 19. da Silva, R. R. *et al.* Propagating annotations of molecular networks using in silico fragmentation.
19 *PLoS Comput. Biol.* **14**, e1006089 (2018).
- 20 20. van der Hooft, J. J. J., Wandy, J., Barrett, M. P., Burgess, K. E. V. & Rogers, S. Topic modeling for
21 untargeted substructure exploration in metabolomics. *Proc. Natl. Acad. Sci. U. S. A.* **113**, 13738–
22 13743 (2016).
- 23 21. Ernst, M. *et al.* MolNetEnhancer: Enhanced Molecular Networks by Integrating Metabolome Mining
24 and Annotation Tools. *Metabolites* **9**, (2019).
- 25 22. Dührkop, K. *et al.* SIRIUS 4: a rapid tool for turning tandem mass spectra into metabolite structure
26 information. *Nat. Methods* **16**, 299–302 (2019).

23. Tsugawa, H. *et al.* MS-DIAL: data-independent MS/MS deconvolution for comprehensive metabolome analysis. *Nat. Methods* **12**, 523–526 (2015).
24. Wang, M. *et al.* MASST: A Web-based Basic Mass Spectrometry Search Tool for Molecules to Search Public Data. *bioRxiv* 591016 (2019). doi:10.1101/591016
25. Chambers, M. C. *et al.* A cross-platform toolkit for mass spectrometry and proteomics. *Nat. Biotechnol.* **30**, 918–920 (2012).
26. Berthold, M. R. *et al.* KNIME: The Konstanz Information Miner. in *Data Analysis, Machine Learning and Applications* 319–326 (Springer Berlin Heidelberg, 2008).
27. Winnikoff, J. R., Glukhov, E., Watrous, J., Dorrestein, P. C. & Gerwick, W. H. Quantitative molecular networking to profile marine cyanobacterial metabolomes. *J. Antibiot.* **67**, 105–112 (2014).
28. Olivon, F., Grelier, G., Roussi, F., Litaudon, M. & Touboul, D. MZmine 2 Data-Preprocessing To Enhance Molecular Networking Reliability. *Anal. Chem.* (2017). doi:10.1021/acs.analchem.7b01563
29. Ono, K., Demchak, B. & Ideker, T. Cytoscape tools for the web age: D3.js and Cytoscape.js exporters. *F1000Res.* **3**, 143 (2014).
30. Shannon, P. *et al.* Cytoscape: a software environment for integrated models of biomolecular interaction networks. *Genome Res.* **13**, 2498–2504 (2003).
31. Wang, M. Spectral Library Construction and Matching of MS/MS Spectra at Repository Scales. (UC San Diego, 2017).
32. Tautenhahn, R., Böttcher, C. & Neumann, S. Highly sensitive feature detection for high resolution LC/MS. *BMC Bioinformatics* **9**, 504 (2008).
33. Kuhl, C., Tautenhahn, R., Böttcher, C., Larson, T. R. & Neumann, S. CAMERA: An Integrated Strategy for Compound Spectra Extraction and Annotation of Liquid Chromatography/Mass Spectrometry Data Sets. *Anal. Chem.* **84**, 283–289.
34. Vasas, A. & Hohmann, J. Euphorbia Diterpenes: Isolation, Structure, Biological Activity, and Synthesis (2008–2012). *Chem. Rev.* **114**, 8579–8612.

35. Cohen, L. J. *et al.* Commensal bacteria make GPCR ligands that mimic human signalling molecules. *Nature* **549**, 48–53 (2017).
36. Pedregosa, F. *et al.* Scikit-learn: Machine Learning in Python. *J. Mach. Learn. Res.* **12**, 2825–2830 (2011).
37. Meier, F. *et al.* Online Parallel Accumulation-Serial Fragmentation (PASEF) with a Novel Trapped Ion Mobility Mass Spectrometer. *Mol. Cell. Proteomics* **17**, 2534–2545 (2018).
38. Kind, T. *et al.* LipidBlast in silico tandem mass spectrometry database for lipid identification. *Nat. Methods* **10**, 755–758 (2013).
39. Mohimani, H. *et al.* Dereplication of peptidic natural products through database search of mass spectra. *Nat. Chem. Biol.* **13**, 30–37 (2017).
40. Mohimani, H. *et al.* Dereplication of microbial metabolites through database search of mass spectra. *Nat. Commun.* **9**, 4035 (2018).
41. Beauxis, Y. & Genta-Jouve, G. Metwork: a web server for natural products anticipation. *Bioinformatics* (2018). doi:10.1093/bioinformatics/bty864
42. Allen, F., Greiner, R. & Wishart, D. Competitive fragmentation modeling of ESI-MS/MS spectra for putative metabolite identification. *Metabolomics* **11**, 98–110 (2015).
43. Olivon, F. *et al.* MetGem Software for the Generation of Molecular Networks Based on the t-SNE Algorithm. *Anal. Chem.* (2018). doi:10.1021/acs.analchem.8b03099
44. Ruttkies, C., Schymanski, E. L., Wolf, S., Hollender, J. & Neumann, S. MetFrag relaunched: incorporating strategies beyond in silico fragmentation. *J. Cheminform.* **8**, 1–16 (2016).

Author Contributions

L.F.N., D.P., M.W., and P.D. conceived the method and supervised its implementation and wrote the manuscript.
L.F.N and D.P contributed equally to the work.
I.P., L.F.N., M.E., and T.A. created the FBMN prototype in Optimus.
M.W., L.F.N. D.P. and Z.Z. created the FBMN workflow on GNPS.
R.S., L.F.N, M.W., D.P., A.K., M.F, Z.Z., A.S., and T.P. developed the GNPS Export module in MZmine.
K.D., A.K., M.L., and S.B. developed the spectral clustering algorithm and SIRIUS export in MZmine.
A.S., and L.F.N. created the GNPS Export tool in OpenMS, with the guidance from F.A, O.A., and O.K.

J.R. and M.Wit. created the XCMS export tool.
H.T, M.W. and L.F.N. made possible the integration with MS-DIAL.
L.F.N., A.B., H.N., F.Z. and T.D. made possible the integration with MetaboScape.
M.W., G.I., B.S., S.W.M. and J.M. made possible the integration with Progenesis QI.
F.V. performed the mass spectrometry for the plasma and NIST1950SRM samples.
A.A. performed the mass spectrometry for the American Gut Project samples.
A.K.J, L.F.N, and A.Tri. analyzed the results of the plasma samples.
J.R and L.F.N. performed the XCMS processing of the forensic dataset.
L.F.N. and M.W. created the general documentation.
D.P., L.F.N. and R.d.S. created the MZmine documentation.
K.B.K., H.Y. created the MS-DIAL documentation.
F.V., J.M.G. K.W., and A.K.J. prepared the MS-DIAL video tutorial.
M.W., R.S., D.P. prepared the MZmine video tutorials.
M.E., R.d.S., J.R., O.M., and S.N. created the XCMS documentation.
L.F.N and A.S. created the OpenMS documentation.
L.F.N, N.H.N., and T.D, created the MetaboScape documentation.
M.C., and L.-I. M. documented the FBMN interface workflow.
M.N.-E., I.K., and C.M created the Cytoscape documentation.
H.M, A.G., M.W. and L.F.N. made the integration with DEREPLICATOR.
M.W., J.J.J.v.d.H, M.E. and S.R. made the integration with MS2LDA.
R.d.S made the integration with NAP.
M.M., N.B., X.C., V.V.P., N.G. R.A.Q, A.A., Z.K., and S.N. tested and provided suggestions on how to improve the methods.
J.J.J.v.d.H., V.P., T.A., A.K.J., T.P., A.L.G, L.-I.M., P.-M.A., S.B., and S.N. improved the manuscript.
All authors have contributed to the final manuscript.

Ethics/COI declaration


Pieter C. Dorrestein is a scientific advisor for Sirenas LLC.
Mingxun Wang is a consultant for Sirenas LLC and the founder of Omata labs LLC.
Tomáš Pluskal is a consultant for Ginkgo Bioworks.
Alexander Aksenov is a consultant for Omata labs LLC.
Theodore Alexandrov is on the Scientific Advisory Board of SCiLS, a Bruker company.
Kai Dührkop, Marcus Ludwig, Markus Fleischauer and Sebastian Böcker are founders of Bright Giant GmbH.
Aiko Barsch, Sven W. Meyer, Heiko Neuweiger and Florian Zubeil are employees of Bruker Daltonics GmbH.
Giorgis Isaac, Jonathan McSayles, and Bindesh Shrestha are employees of Waters Corporation.

Acknowledgements

We gratefully acknowledge financial support by: the U.S. National Institutes of Health for the Center for Computational Mass Spectrometry grant (P41 GM103484), the reuse of metabolomics data (R03 CA211211), and the tools for rapid and accurate structure elucidation of natural products (R01 GM107550) to P.D; the European Union's Horizon 2020 grants 704786 (MSCA-GF to L.F.N) 634402, 777222 (T.A. and I.P.) and the ERC Consolidator grant METACELL (T.A.). The German Research Foundation (DFG) with grant number PE 2600/1 to D.P.; S.N. acknowledges funding from Bundesministerium für Bildung und Forschung (FKZ 031L0107) and the European Commission (EC654241); NSF grant IOS-1656481 to PCD and AMCR; O.A., acknowledge the funding from: the

1 Bundesministerium für Ernährung und Landwirtschaft (FKZ 2816501214), the Bundesministerium für
 2 Wirtschaft und Energie (FKZ AiF18475N), the Bundesministerium für Bildung und Forschung (FKZ
 3 031A430C), and the European Commission (823839) that also benefited to F.A. and O.K.; S.B.
 4 acknowledges funding from Deutsche Forschungsgemeinschaft (BO 1910/20); J.J.J.v.d.H. was supported
 5 by an Accelerating Scientific Discoveries Grant funded by the Netherlands eScience Center [NLeSC]
 6 (No. ASDI.2017.030). Z.K. was supported by the project International Mobility of Researchers
 7 (CZ.02.2.69/0.0/0.0/16_027/0007990). The authors would like to thank Nils Hoffman for maintaining the
 8 mzTab-M format.

a

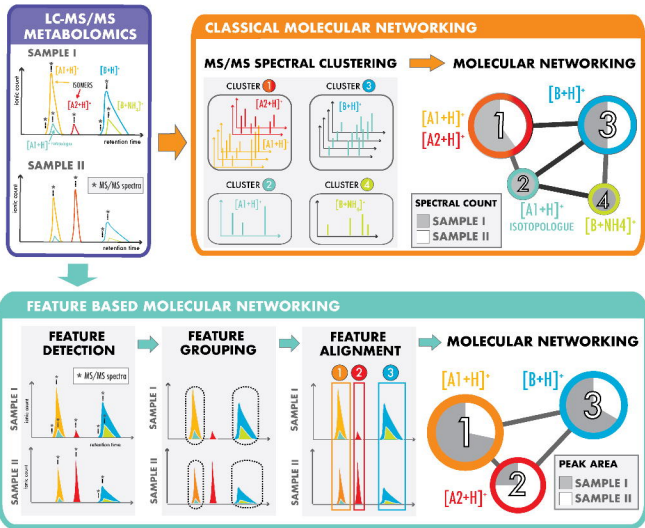

b

